

Marbul



Marbul

“All-round” sophistication

About Marbul

- Soft curves
- Reflector sits perfectly within the globe's thin rim
- Direct light at different angles

Designer: Jeffrey Huyghe





Market segments

- High-end residential
- Hospitality
- Boutiques

Design


Mounting



Marbul 48V



Marbul track 48V

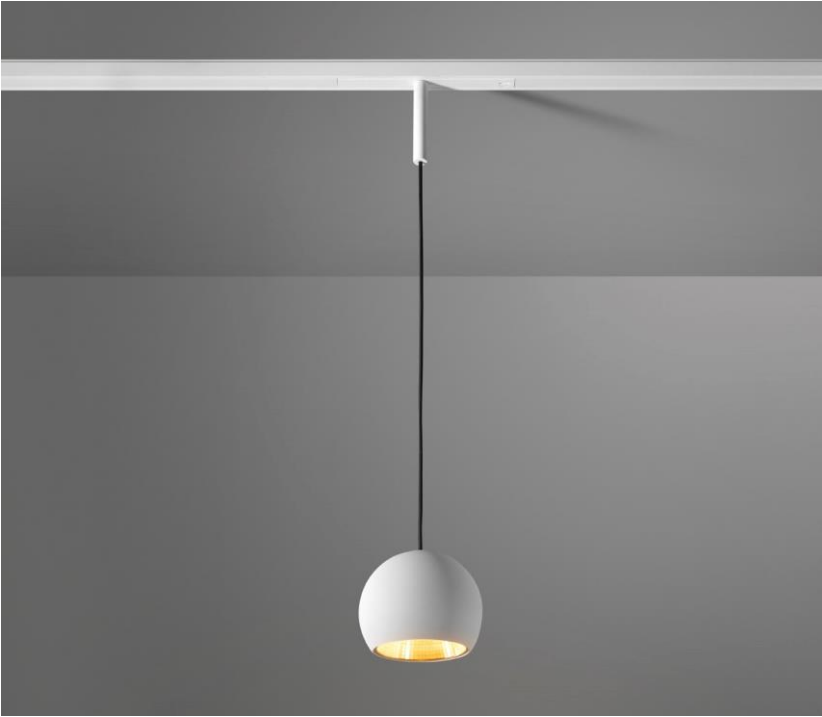

Marbul track suspension 48V



Marbul track suspension adj 48V


Marbul 48V

Adjustability

- Contains same flexibility
- H360°
- V90°

Mechanical lock

- Because of weight > 1kg mechanical look instead of magnetic fixation

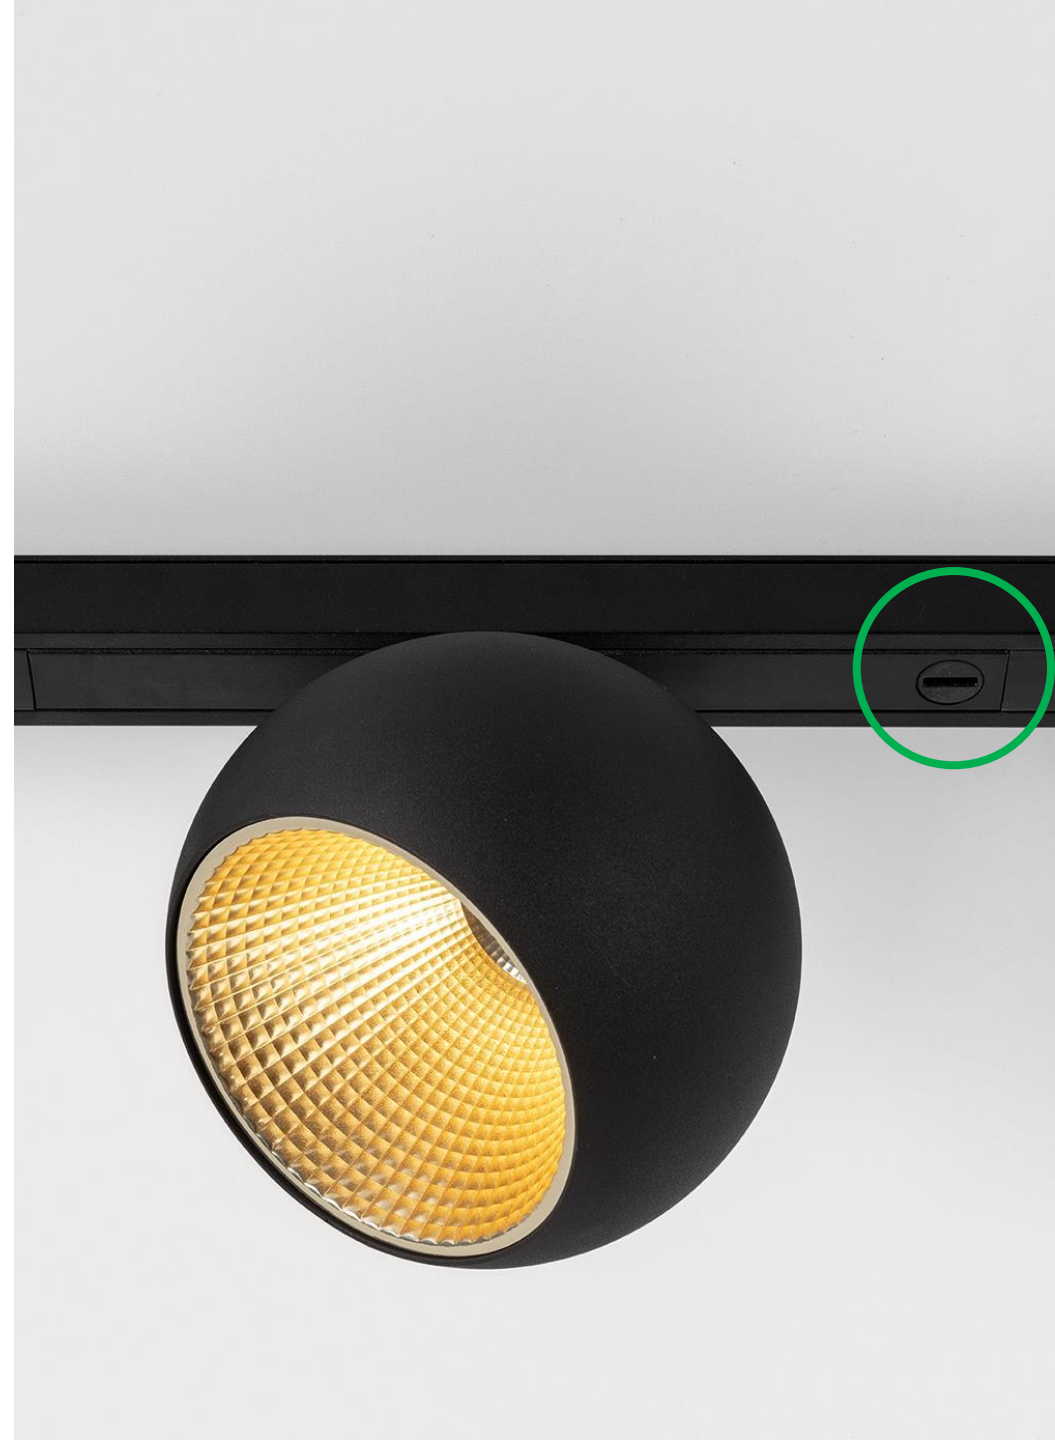



CASAMBI



CASAMBI

Colours



Reflectors




Aluminum (S,M,F – WD M,F)



Champagne (S,M,F – WD F)



Gold (S,M,F – WD F)

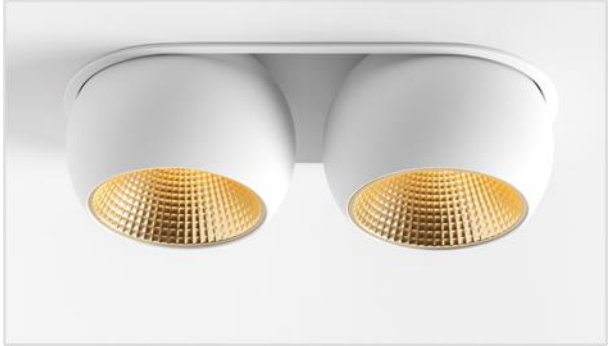


Pimp your desired light effect



Design features surface

Streamlined gearhouse for a light and elegant look


Asymmetric globes which tilt independently

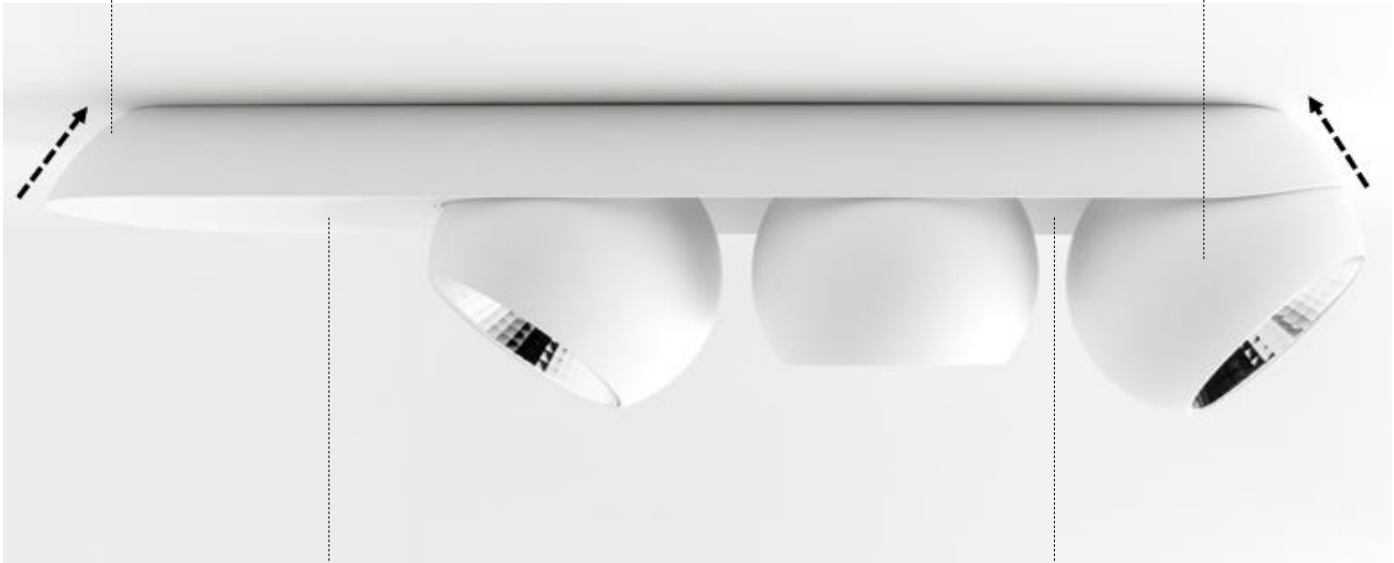

Magnetic coverplate keeps screws and wires neatly out of sight


Shape adapted to the most optimal adjustability

1, 2 or 3 adjustable spheres

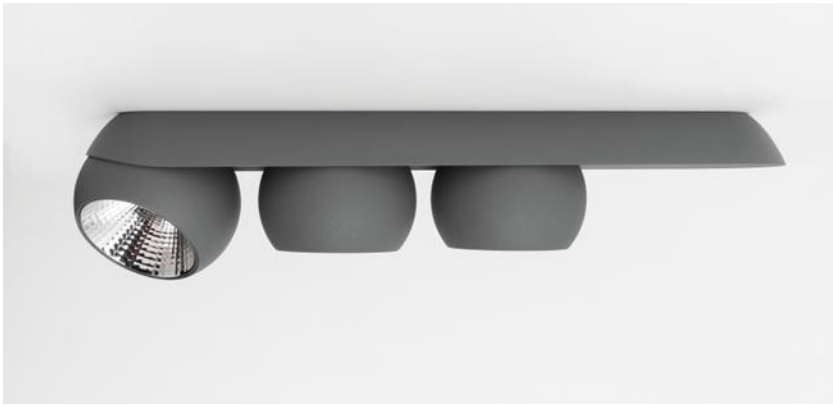


Design features recessed

Sphere embraced by recessed housing with **ultra fine border** (5mm)

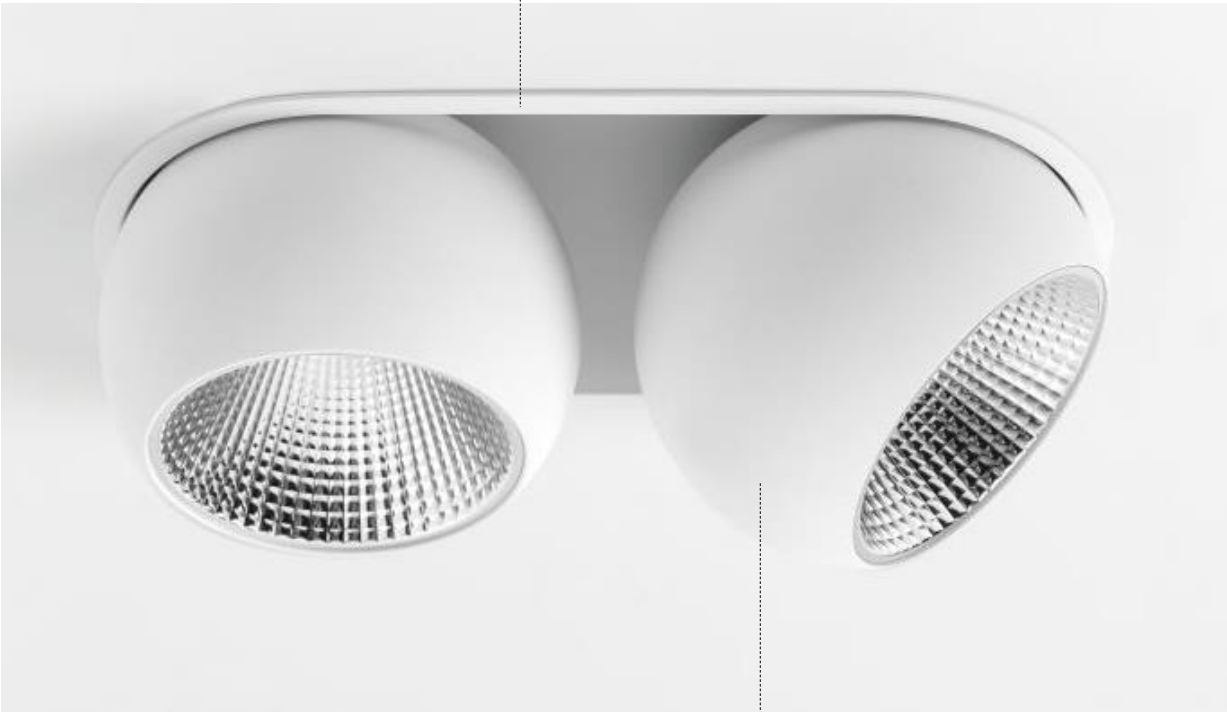

Semi-recessed, adjustable spheres

1 or 2 adjustable spheres

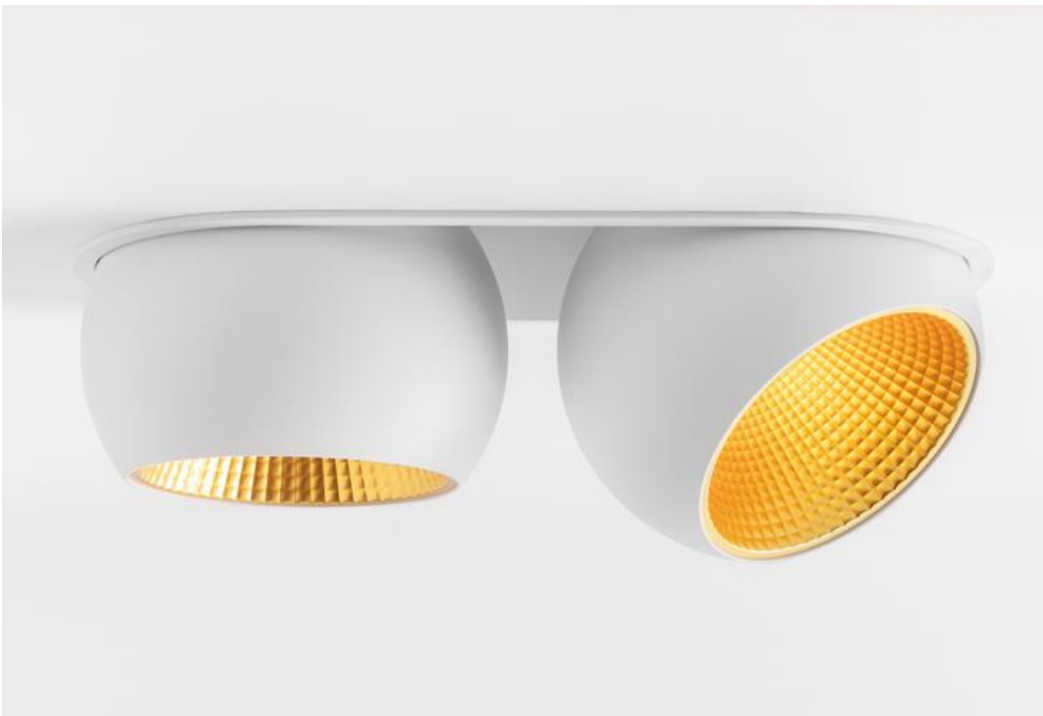

Design features suspension




Thin, **matt black cable** – 2m

With or without **rotation cap**

Playful, geometric shape

Fix or adjustable

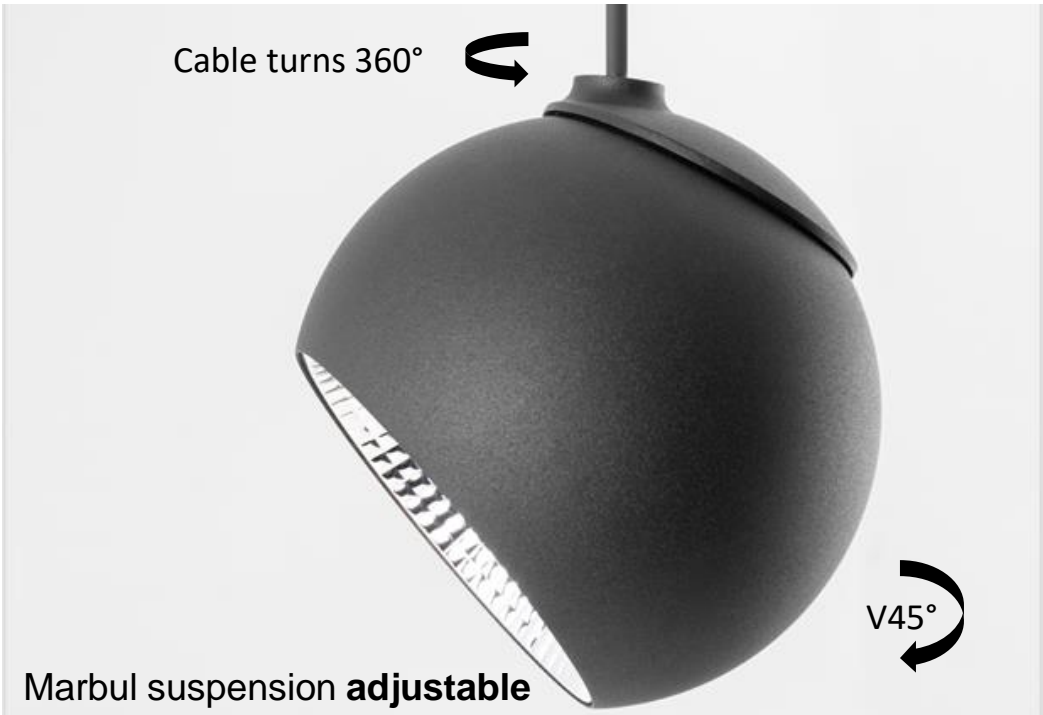

Driver included (DI), driver excluded (DE) or Kompas



Marbul suspension **DI**
Surface mounted



Marbul suspension **DE**
Semi-recessed



Kompas (**DE or DI**)
Surface mounted




Group and place at unequal heights for a playful effect



Specifications

Marbul ⁽¹⁾
2700K - 3000K <u>Only 1L also in warm dim: 1800K – 3000K</u>
CRI90+
10° - 25° - 40°
IP20
718 lm
8,5 W
84 lm/W
Tre dim (also WD) 1-10V/pushdim Dali


(1) 3000K, white struc, 25°, value per lightsource

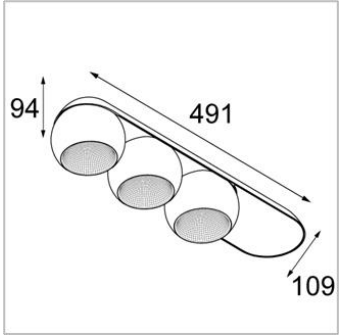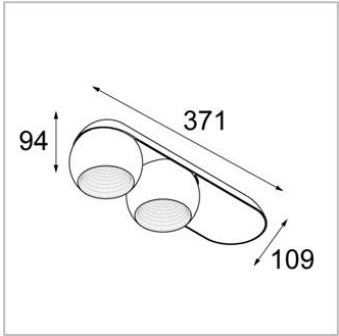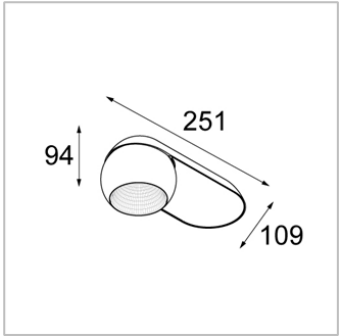

Always check our website for the most complete and up to date specifications!

Marbul	
2700K - 3000K Both also in warm dim: 1800K – 3000K	
CRI90+	
10° - 25° - 40°	
IP20	
718 lm ⁽¹⁾	964 lm ⁽²⁾
6 W ⁽¹⁾	9 W ⁽²⁾
120 lm/W ⁽¹⁾	108 lm/W ⁽²⁾
Tre dim 1-10V/pushdim Dali	

(1) 3000K, white struc, 25°, 350mA, value per lightsource
(2) 3000K, white struc, 25°, 500mA, value per lightsource


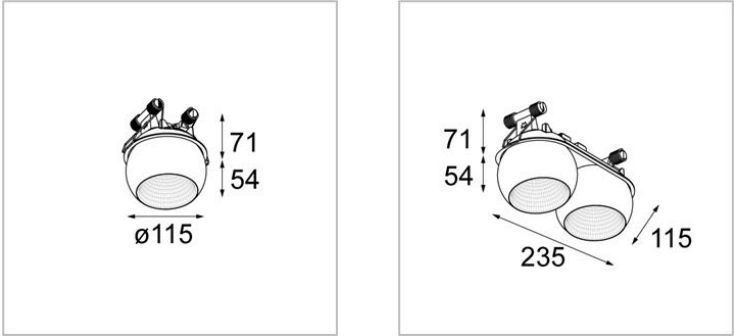


Always check our website for the most complete and up to date specifications!

Marbul – DE		Marbul - DI
2700K - 3000K Both also in warm dim: 1800K – 3000K		
CRI90+		
10° - 25° - 40°		
IP20		
718 lm ⁽¹⁾	964 lm ⁽²⁾	718 lm ⁽¹⁾
6 W ⁽¹⁾	9 W ⁽²⁾	8,5 W ⁽¹⁾
120 lm/W ⁽¹⁾	108 lm/W ⁽²⁾	84 lm/W ⁽¹⁾
dimmable		Tre dim (also WD) 1-10V/ pushdim Dali

(1) 3000K, white struc, 25°, 350mA

(2) 3000K, white struc, 25°, 500mA



Always check our website for the most complete and up to date specifications!



DESIGN

ORGANIC FLOWING FORMS
ULTRA THIN REFLECTOR TRIM
NO WIRES, NO SCREWS
WHITE, BLACK & DONKEY GREY
FINISHINGS



APPLICATION

ACCENT LIGHTING
HIGH-END RESIDENTIAL
HOSPITALITY
CEILING & WALL MOUNTING
SURFACE-MOUNTED, RECESSED
AND SUSPENDED
GEAR INCLUDED OR EXCLUDED



TECHNOLOGY

360° ROTATION, 45° INCLINATION
FROM SUPER SPOT TO FLOOD IN
MULTIPLE COLOURS
ACCURATE COLOUR RENDERING
POWERFUL LUMEN PACKAGE
WARM DIM TECHNOLOGY
CONNECTED LIGHTING

















