

MP78




MP78

All round LED profile

About MP78

- Ultra thin profile
- 3 different lamp-units
- General and/or accent lighting
- Consistent colour temperatures

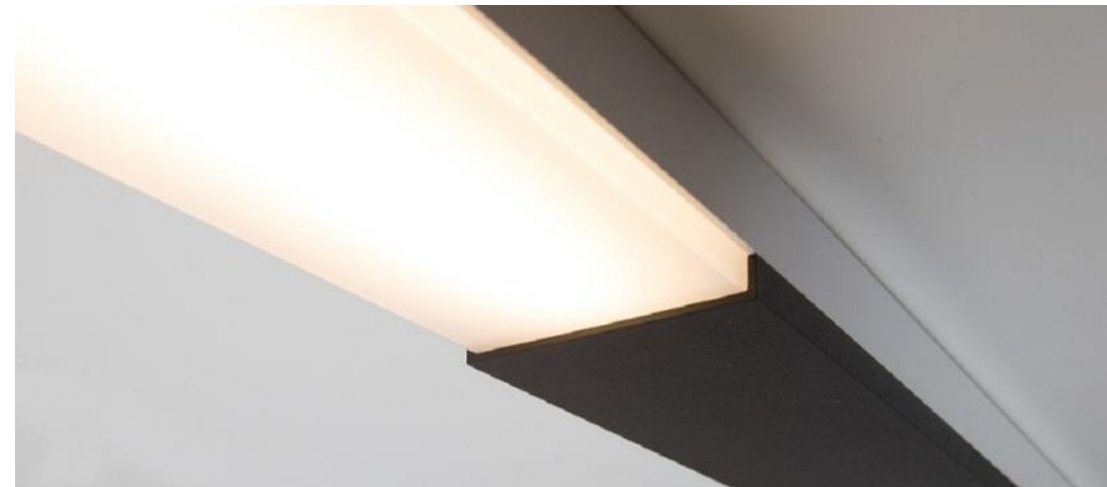




Market segments

- High-end residential
- Hospitality
- Retail
- office

Design

Mounting

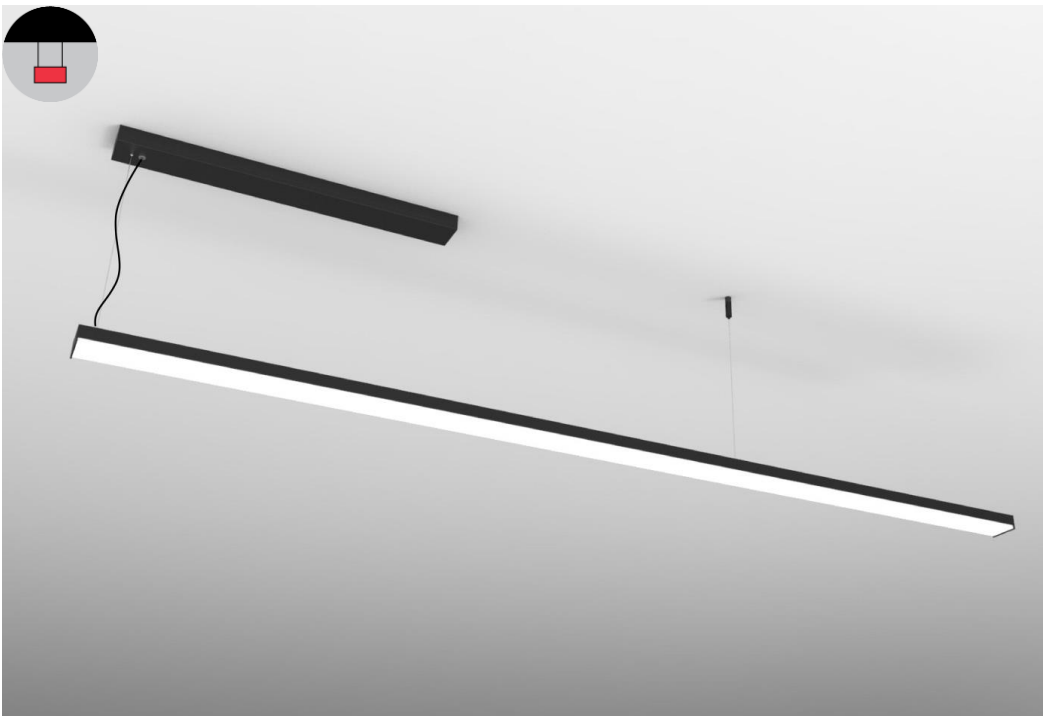



Colours

All colours can be combined with each other
Other RAL-colours on demand




General lighting

- Profile base = heatsink
- Polycarbonate diffuser slides under cover and endplate

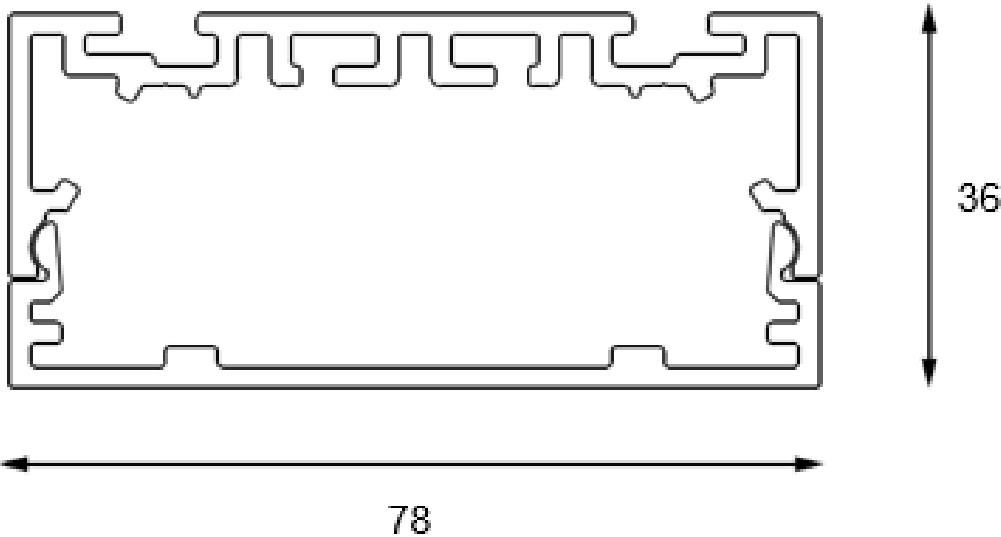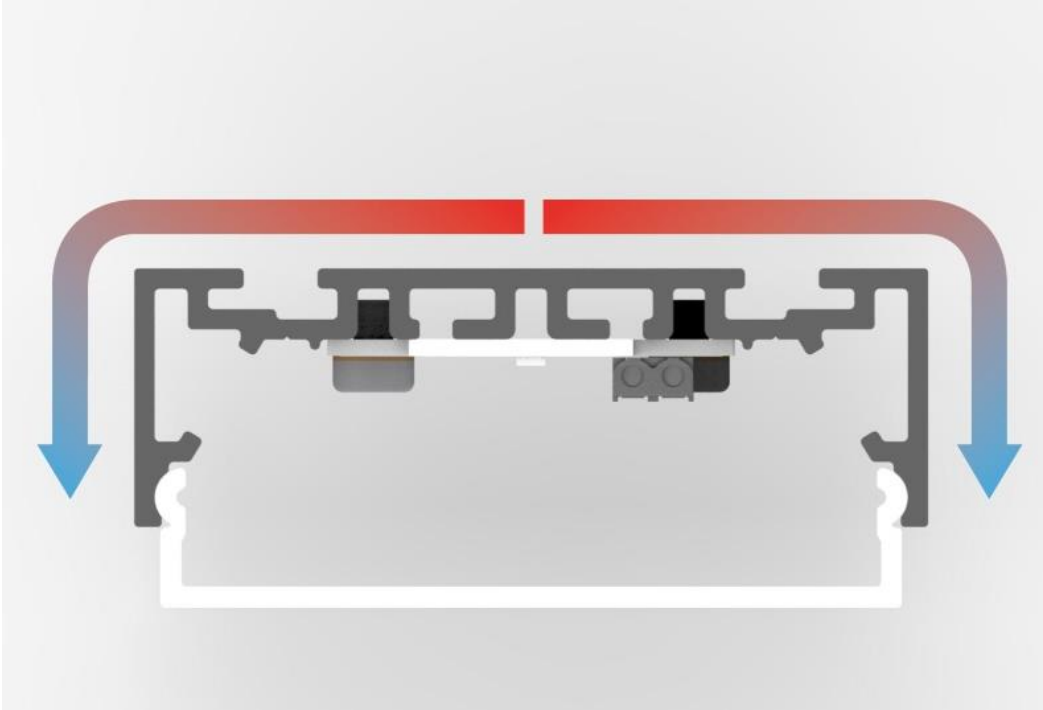

Accent lighting – recessed spotlight


- Profile base = heatsink
- Single or double configuration

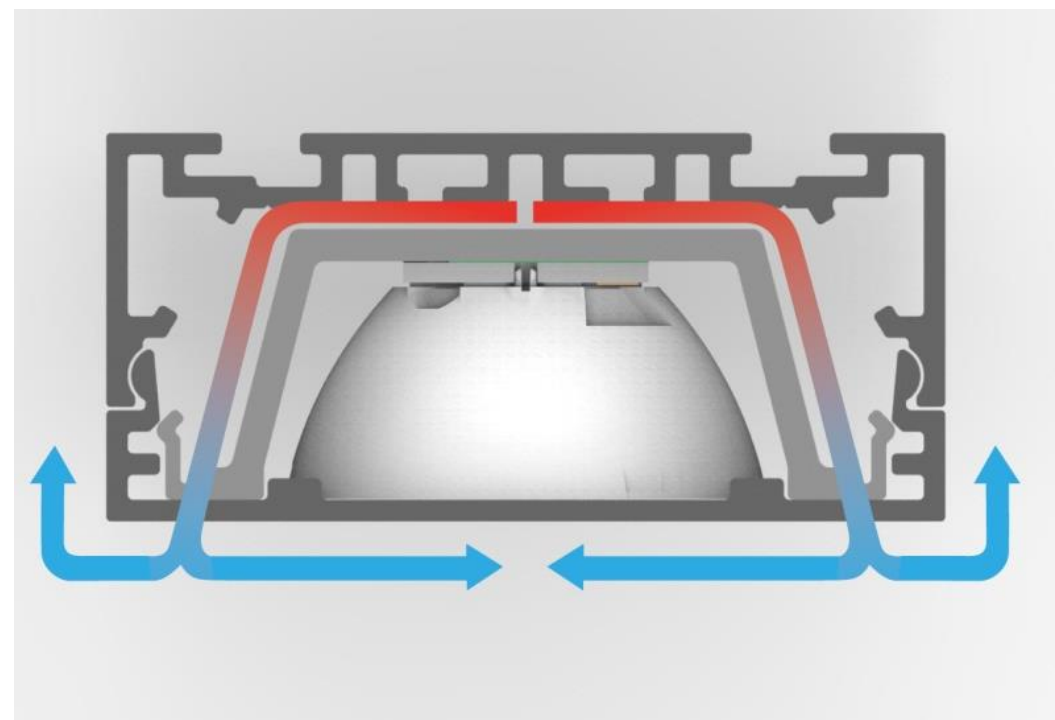



Accent lighting - Rektor

- Black struc or white struc
- H 360° V 90°
- Single or double configuration

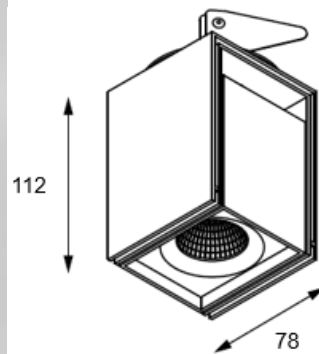


Accessories

- 180° connection to configure >4m
- 90° connection to make angles
- Suspension set with steel cable of max. 4m (alu / blstr / whstr)
- Remote gear or surface mounted driver




Power feed options

- Power feed kit = connection box + cable -> max length of 2m

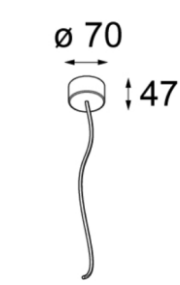


Power feed kit
(3P/5P)

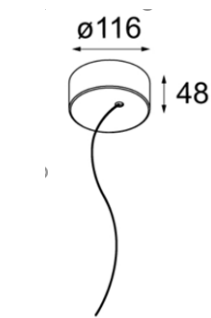


Power feed kit (9P)

- Connection box + cable -> max length of 4m (= suspension set length)



Connection box
(3P/5P)




Connection box (9P)



Transparent
cable

Max. profile length
= 4000mm

Design features

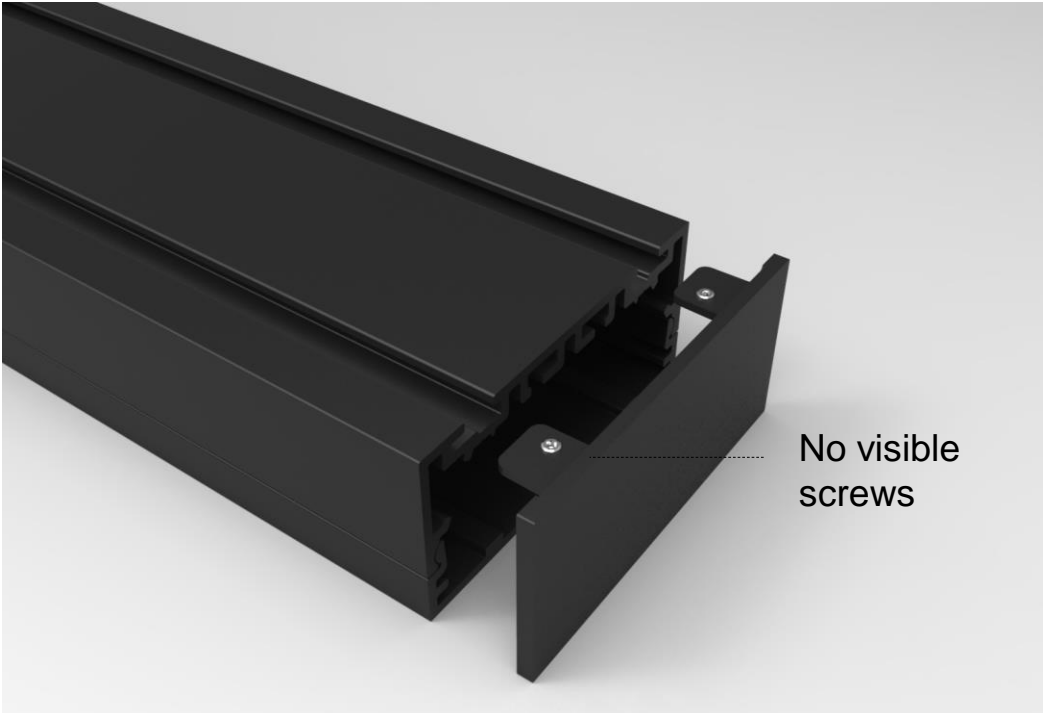

Specifications



DESIGN

ULTRA THIN PROFILE

CHOOSE YOUR PREFERRED
COMBINATION IN BLACK AND/OR
WHITE STRUC

NO VISIBLE SCREWS



APPLICATION

HIGH-END RESIDENTIAL
HOSPITALITY
RETAIL
OFFICE

GENERAL AND ACCENT LIGHTING

SUSPENDED OR SURFACE
MOUNTED

GEAR INCLUDED OR WITH
REMOTE GEAR-UNITS SURFACE



TECHNOLOGY

CONSISTENT COLOUR
TEMPERATURES

ACCURATE COLOUR RENDERING

MEDIUM OR FLOOD REFLECTOR

MULTIPLE DIM OPTIONS

PROFILE SERVES AS HEATSINK















