

# SLD25



## SLD25

Architectural hit

# About SLD25

**S**traight **L**ine **D**edicated (for LED)

**25**mm width

Entirely custom-made, full modularity







## Market segments

- High-end residential

# Design

# Mounting

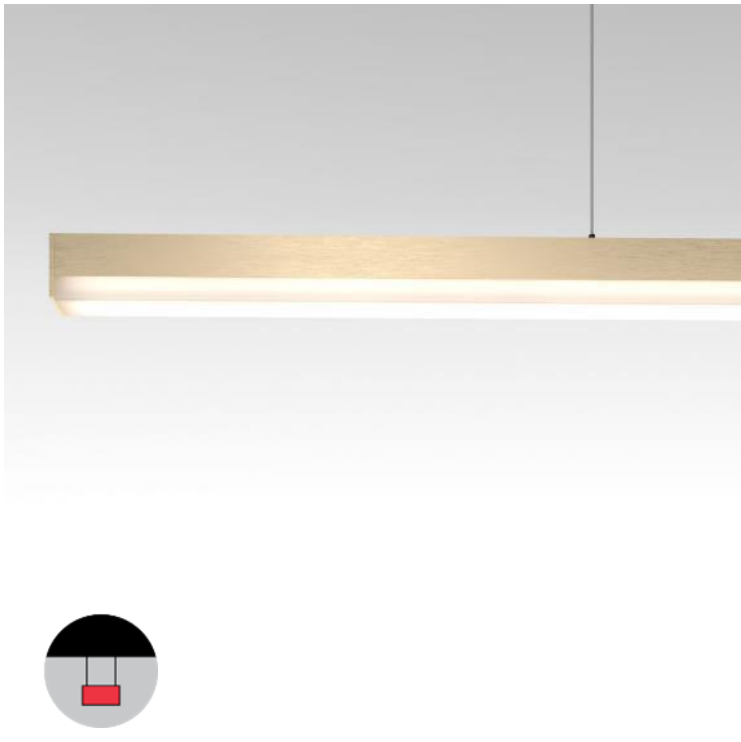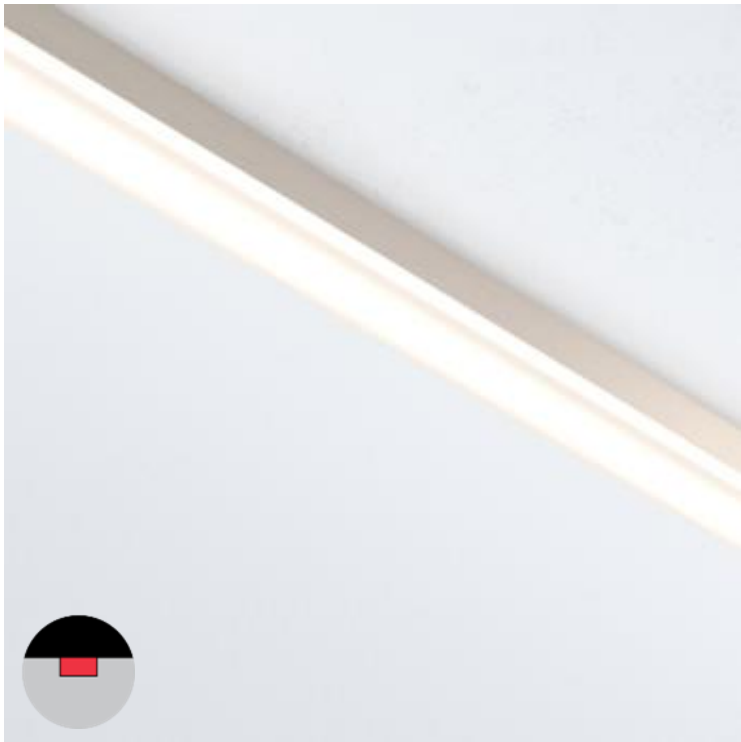

# Colours



White Structure



Brushed Anodised Silver Bronze



Brushed Anodised Champagne




Black Structure



Brushed Anodised Bronze

# Diffusers

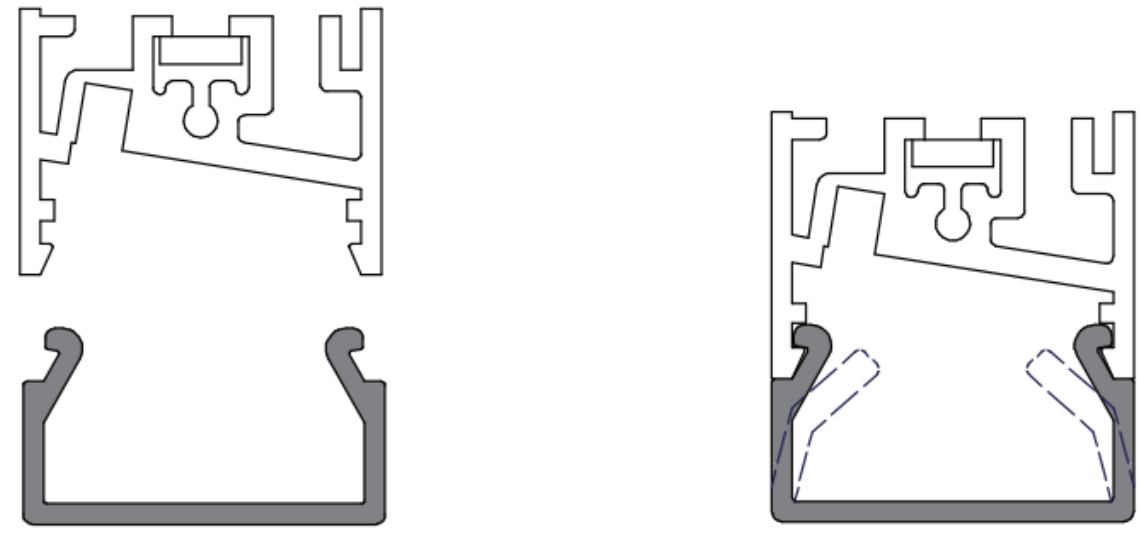

Poly out  
Easy to click in and out



# Accessories

- 90° mechanical connection to make angles
- 180° mechanical connection to configure > 3m
- Wall bracket
- Suspension set with steel cable (alu / blstr / whstr)
- RGB LED-strip on request

# Driver

- 24VDC
- Has to be placed externally
- Dimming types: non-dim / Tre dim / 1-10V / pushdim / Dali
- Multiple profile lengths can be connected to 1 driver
- Calculate the required power range of the driver





**DESIGN**

COLOURS THAT MATCH EVERY  
INTERIOR

THIN AND SLIM DESIGN



**APPLICATION**

RESIDENTIAL

SURFACE, SUSPENDED & WALL  
MOUNTING

180° AND 90° CONNECTIONS

EASY INSTALLATION



**TECHNOLOGY**

CONSISTENT COLOUR  
TEMPERATURES

ACCURATE COLOUR RENDERING

REMOTE DRIVER

YOUR CHOICE, LEDSTRIP  
ALREADY MOUNTED OR NOT















