

Rektor



Rektor

Guiding the way around your space

About Rektor

- Rectangles rule
- Showcase the effect of the right angles

In cooperation with Couvreur.devos





Market segments

- High-end residential
- Hospitality

Design

Design features



- Sleek, asymmetrical design
- Strong, rectangular shape
- Versatile, yet no wires visible
- Colour accent by metal plate



Sizes



Mounting

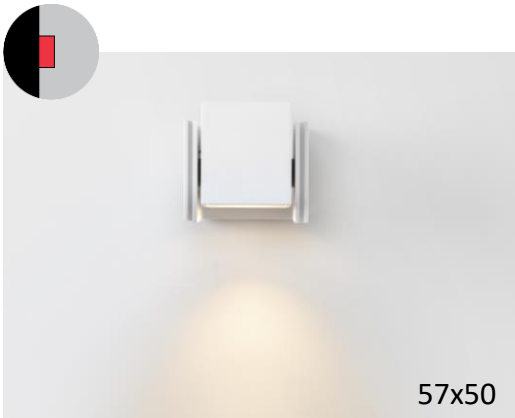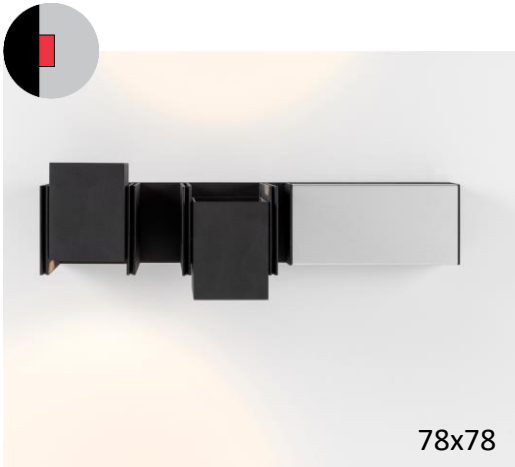





Colours

- Black structure +
 - Black structure
 - Brushed alu
 - Chrome
 - Smoked bronze
- White structure +
 - Chrome brushed alu
 - Smoked bronze
 - White structure



Optical accessories for enhanced visual comfort (only for Rektor 57x50)



HONEYCOMB




CROSSBLADE



SNOOT


Warm dim technology

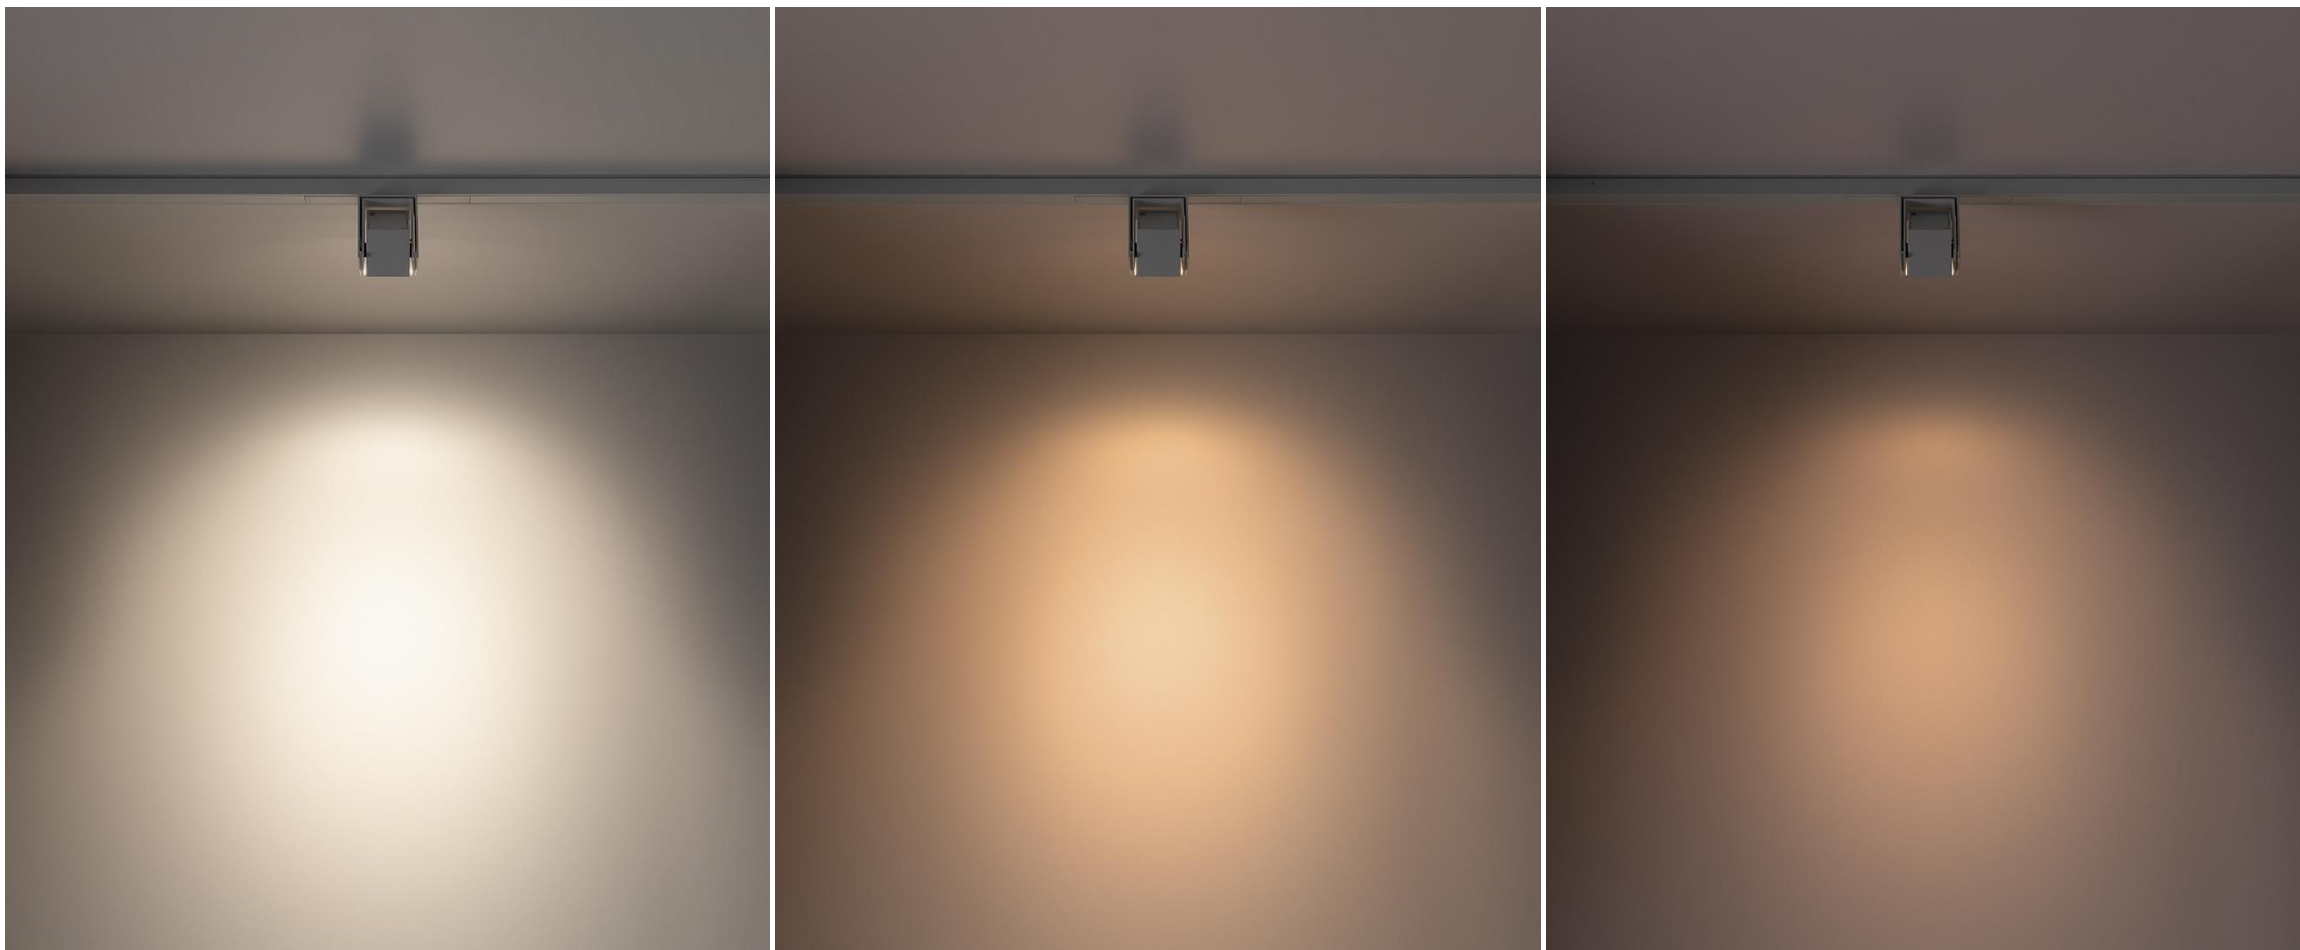

Specifications


Rektor 78x78 1x		Rektor 78x78 2x	
2700K – 3000K			
CRI90+			
25° - 40°			
1233 lm ⁽¹⁾		1800 lm ⁽¹⁾	
19 W ⁽¹⁾		25,7 W ⁽¹⁾	
65 lm/W ⁽¹⁾		69 lm/W ⁽¹⁾	
Non-dimmable Tre dim DI 1-10V/pushdim DI		Non-dimmable Tre dim DI 1-10V/pushdim DI	

(1) 3000K, white struc – brushed alu, 25°

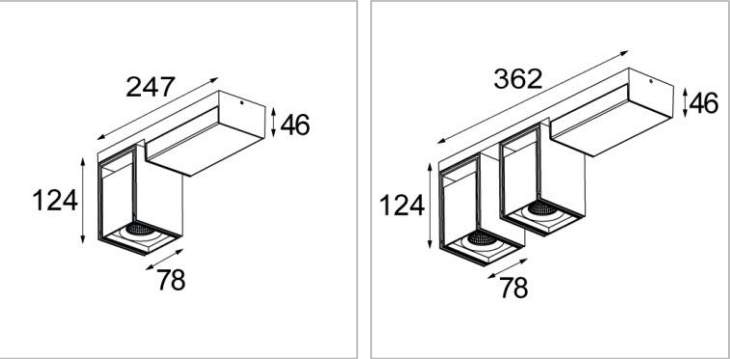

Always check our website for the most complete and up to date specifications!

Rektor 78x78 semi-recessed	
2700K – 3000K	
CRI90+	
25° - 40°	
1234 lm ⁽¹⁾	
16,25 W ⁽¹⁾	
76 lm/W ⁽¹⁾	
DE	

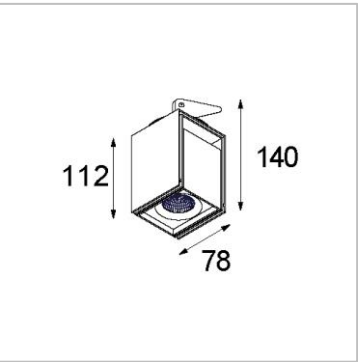


(1) 3000K, white struc, 25°



Always check our website for the most complete and up to date specifications!

Rektor track 230V	
	2700K – 3000K 1800K-3000K
	CRI90+
	25° - 40°
	900 lm ⁽¹⁾
	13,5 W ⁽¹⁾
	67 lm/W ⁽¹⁾
	Dali Casambi

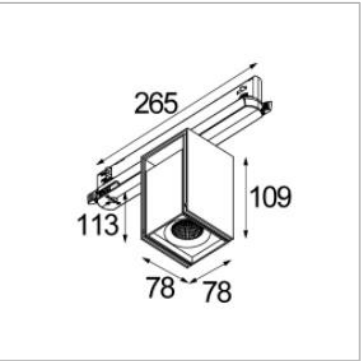

(1) 3000K, white struc, 25°


CASAMBI



Always check our website for the most complete and up to date specifications!

Rektor 57x50		Rektor 57x50 Track 48V	
2700K – 3000K Warm dim: 18000K – 3000K			
CRI90+			
25° - 40°			
576 lm ⁽¹⁾		526 lm ⁽¹⁾	
6 W ⁽¹⁾		7,8 W ⁽¹⁾	
96 lm/W ⁽¹⁾		67 lm/W ⁽¹⁾	
DE		DALI 1-10V	

(1) 3000K, white struc, 500mA

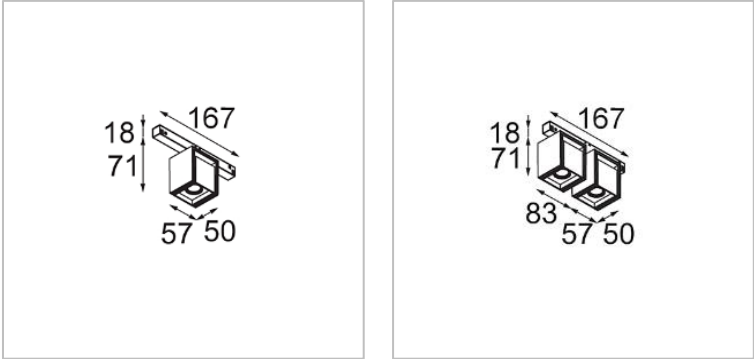

Always check our website for the most complete and up to date specifications!



DESIGN

2 SIZES

SLEEK, ARCHITECTURAL
RECTANGULAR SHAPE

5 DIFFERENT COVER ACCENTS

HORIZONTAL OR VERTICAL
SEMI-RECESSED OR TRACK



APPLICATION

SURFACE (DI) AND
RECESSED (DE) FIXATION

CEILING OR WALL MOUNTED

SINGLE AND MULTIPLE
ADJUSTABLE LIGHT SOURCES



TECHNOLOGY

ACCURATE COLOUR RENDERING


360° ROTATION AND
90° INCLINATION

WARM DIM







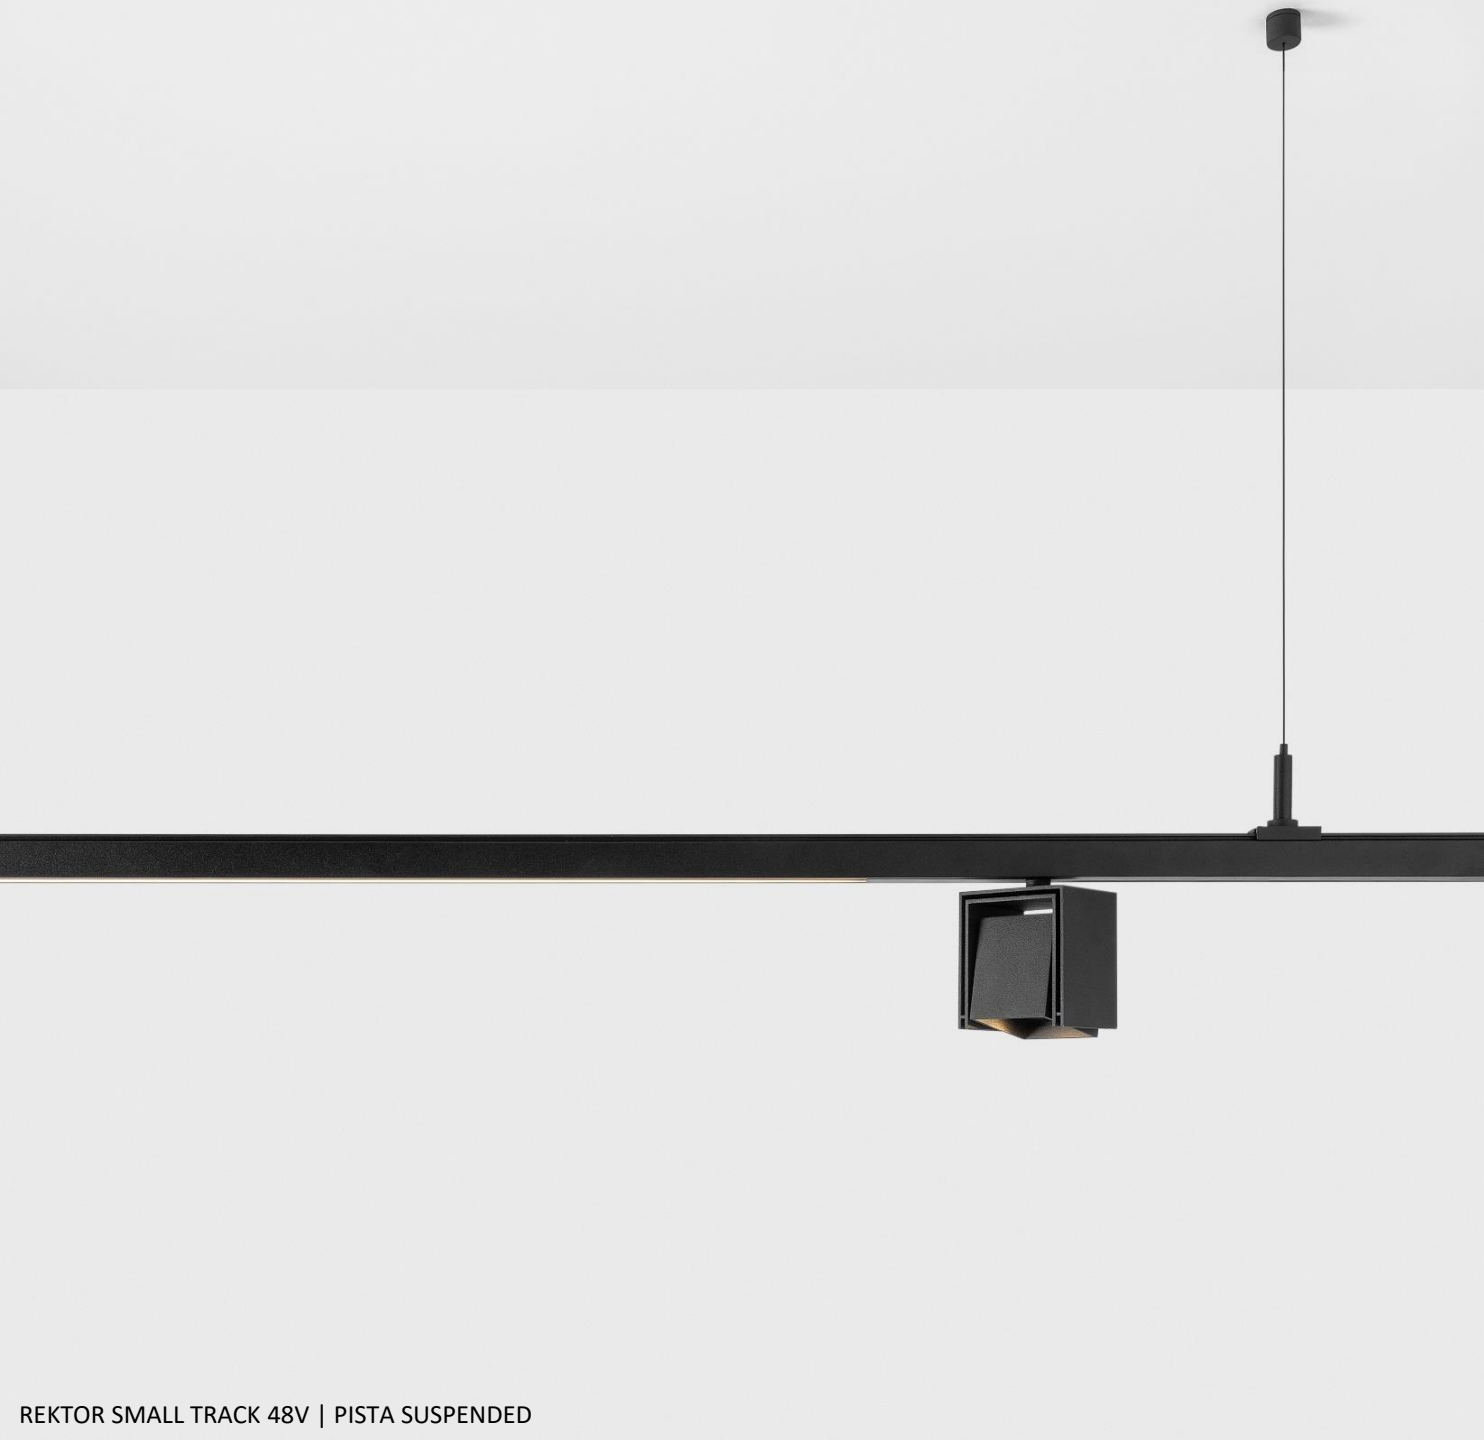

REKTOR SMALL TRACK 48V | PISTA SUSPENDED



REKTOR SMALL SEMI – RECESSED | REKTOR TRACK 48V | PISTA SUSPENDED







REKTOR SMALL TRACK 48V | PISTA SURFACE



REKTOR SMALL TRACK 48V | PISTA SURFACE







REKTOR SMALL TRACK 48V | PISTA UP/DO SUSPENDED



REKTOR TRACK 48V | PISTA UP/DO SUSPENDED

