

SLD35



SLD35

Narrow light line

About SLD35

Straight **L**ine **D**edicated (for LED)

35mm width

Entirely custom-made, full modularity








Market segments



- Residential
- Hospitality
- Retail

Design

Mounting

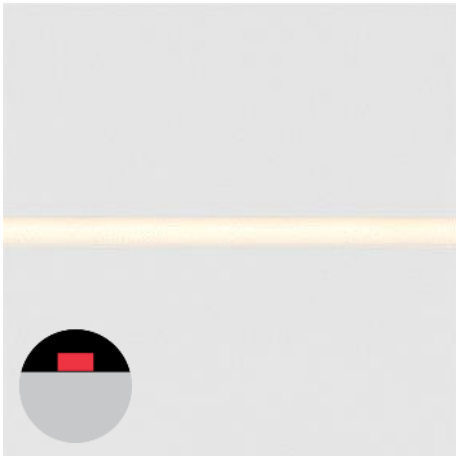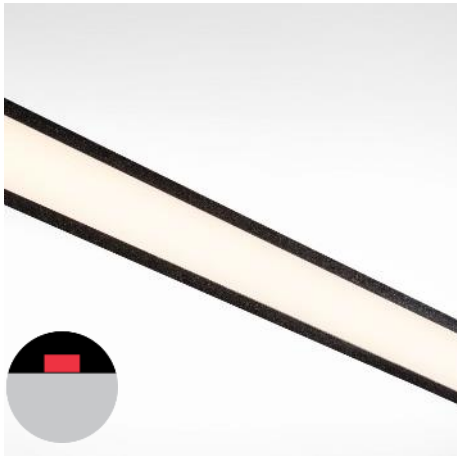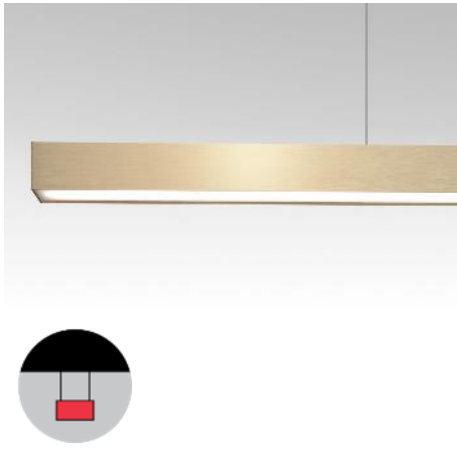

Dimensions

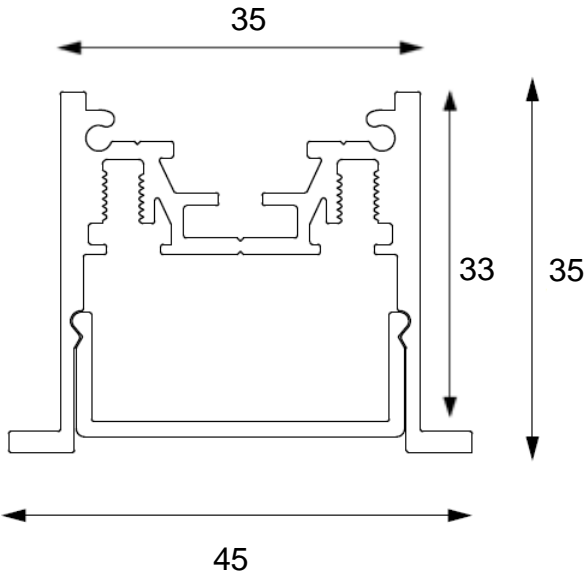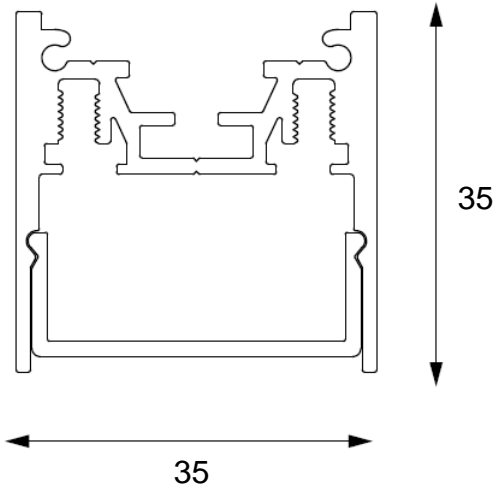

Colours



White Structure



Brushed Anodised Silver Bronze



Brushed Anodised Champagne





Black Structure



Brushed Anodised Bronze

Diffuser

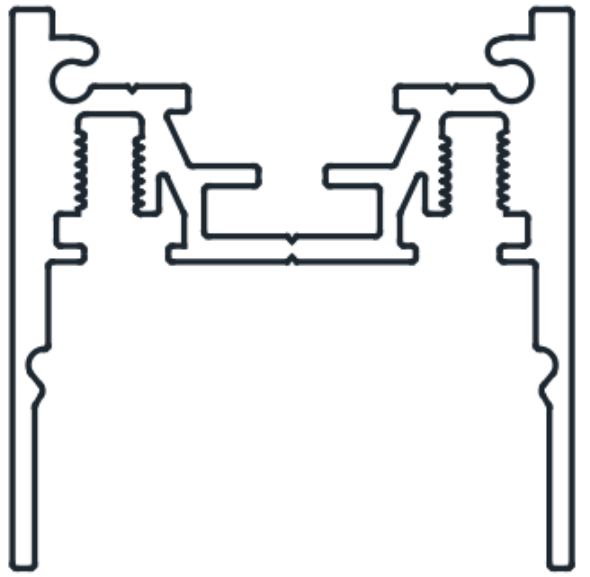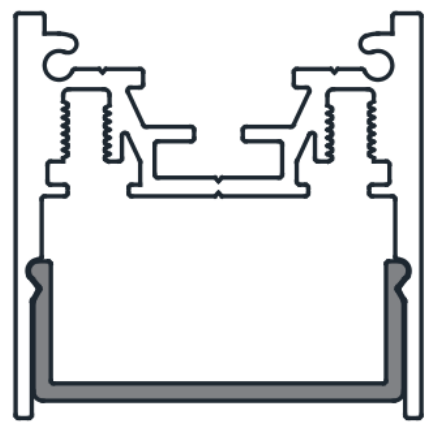


Poly in PMMA
Easy to click in and out



Accessories

- 90° mechanical connection to make angles
- 180° mechanical connection to configure > 4m
- Wall bracket
- Suspension set with steel cable of max. 4m (alu / blstr / whstr)
- RGB LED-strip on request

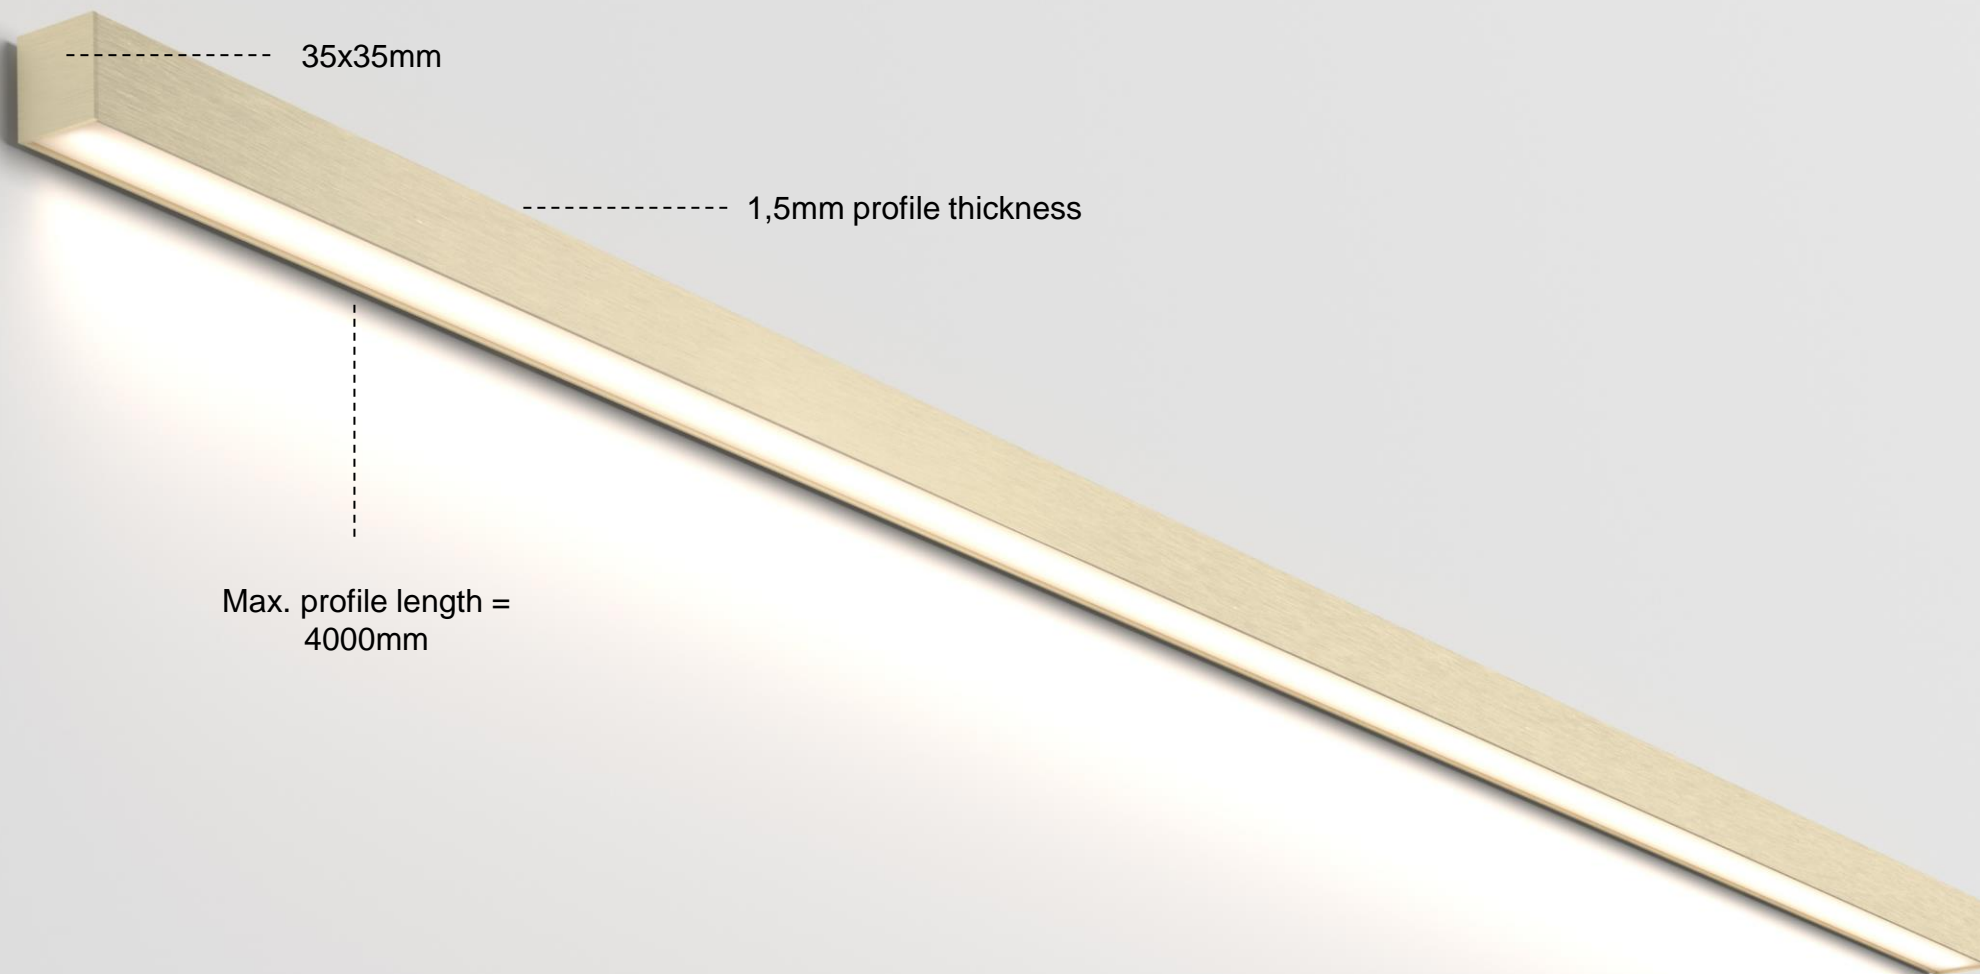

Driver for LED-strip

- 24VDC
- Has to be placed externally
- Dimming types: non-dim / Tre dim / 1-10V / pushdim / Dali
- Calculate the required power range of the driver





DESIGN

COLOURS THAT MATCH EVERY
INTERIOR

DIECAST ENDPLATES AND
SUSPENSION BRACKETS

THIN AND SLIM DESIGN



APPLICATION

RESIDENTIAL
HOSPITALITY
RETAIL

RECESSED, SURFACE,
SUSPENDED & WALL MOUNTING

180° AND 90° CONNECTIONS

EASY INSTALLATION



TECHNOLOGY

CONSISTENT COLOUR
TEMPERATURES

POLY IN PMMA

ACCURATE COLOUR RENDERING

REMOTE OR SURFACE MOUNTED
DRIVER







