

SLD50



SLD50

Slim profile featuring powerful, adjustable spotlights

About SLD50

- Straight Line Dedicated (for LED)
- 50mm width
- Combine with Modupoint

Entirely custom-made, full modularity







Market segments


- Residential
- Hospitality
- Office
- Retail
- Public spaces

Design

Mounting

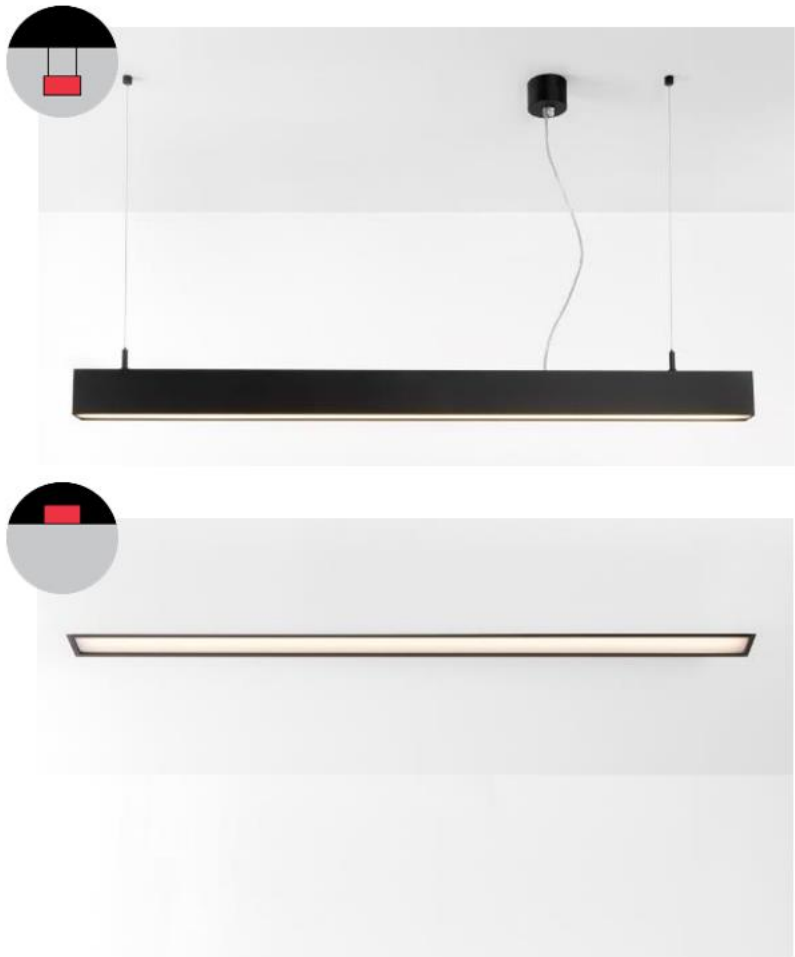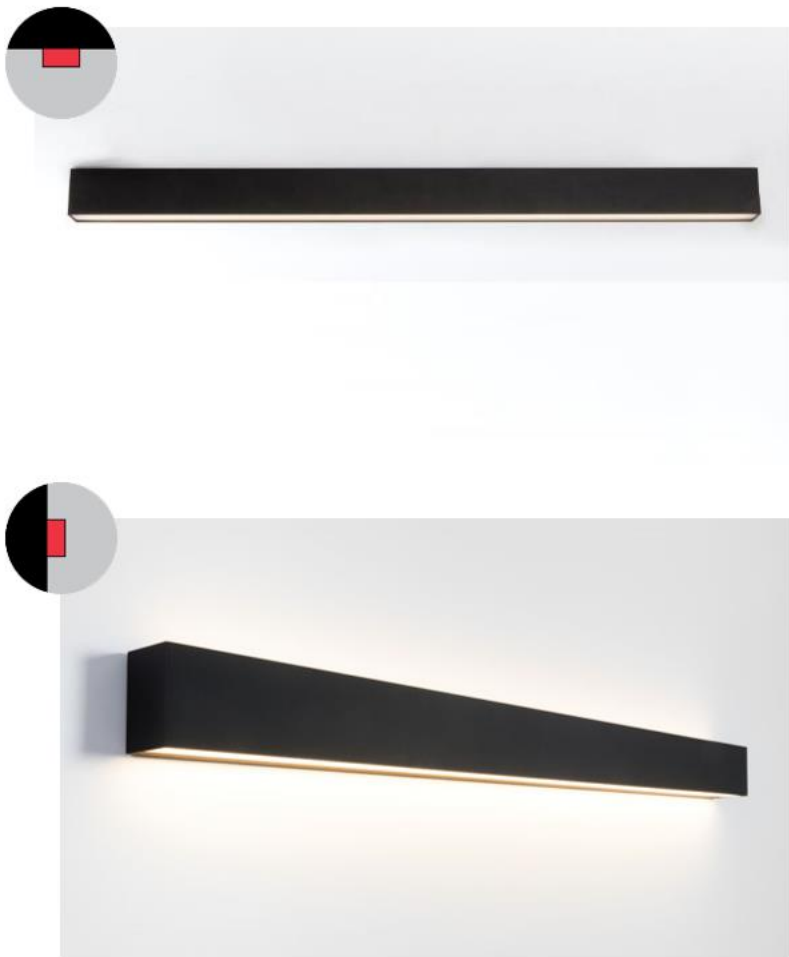


Diffusers

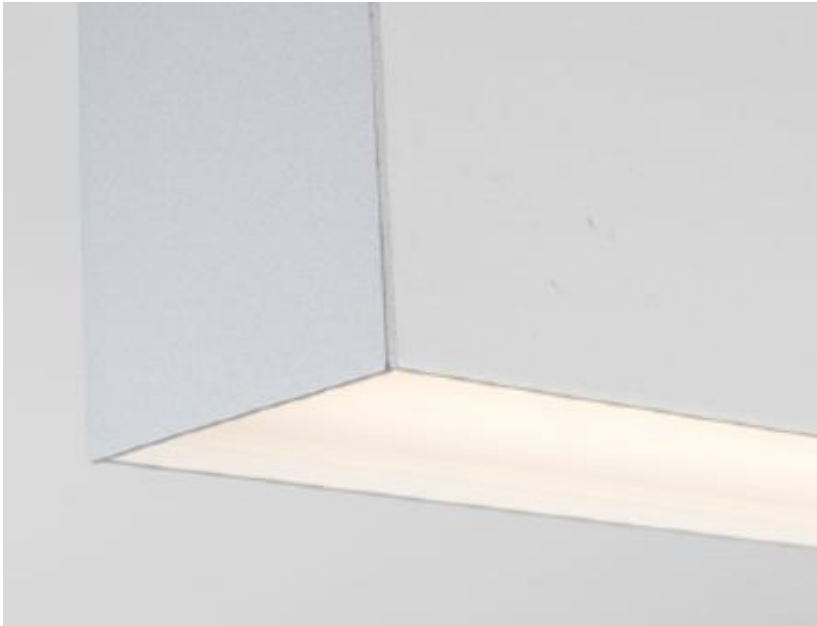

POLY-IN




POLY-OUT

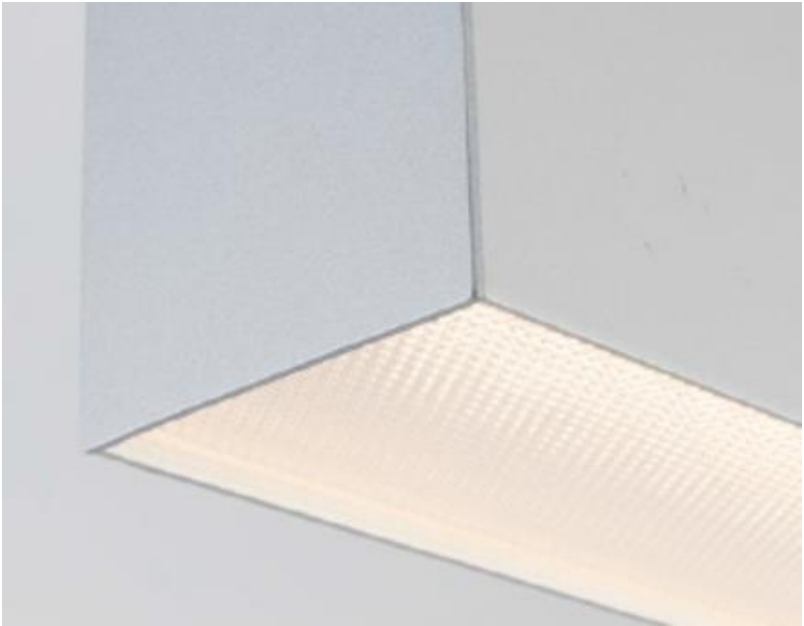

PRISMATIC

Dimensions

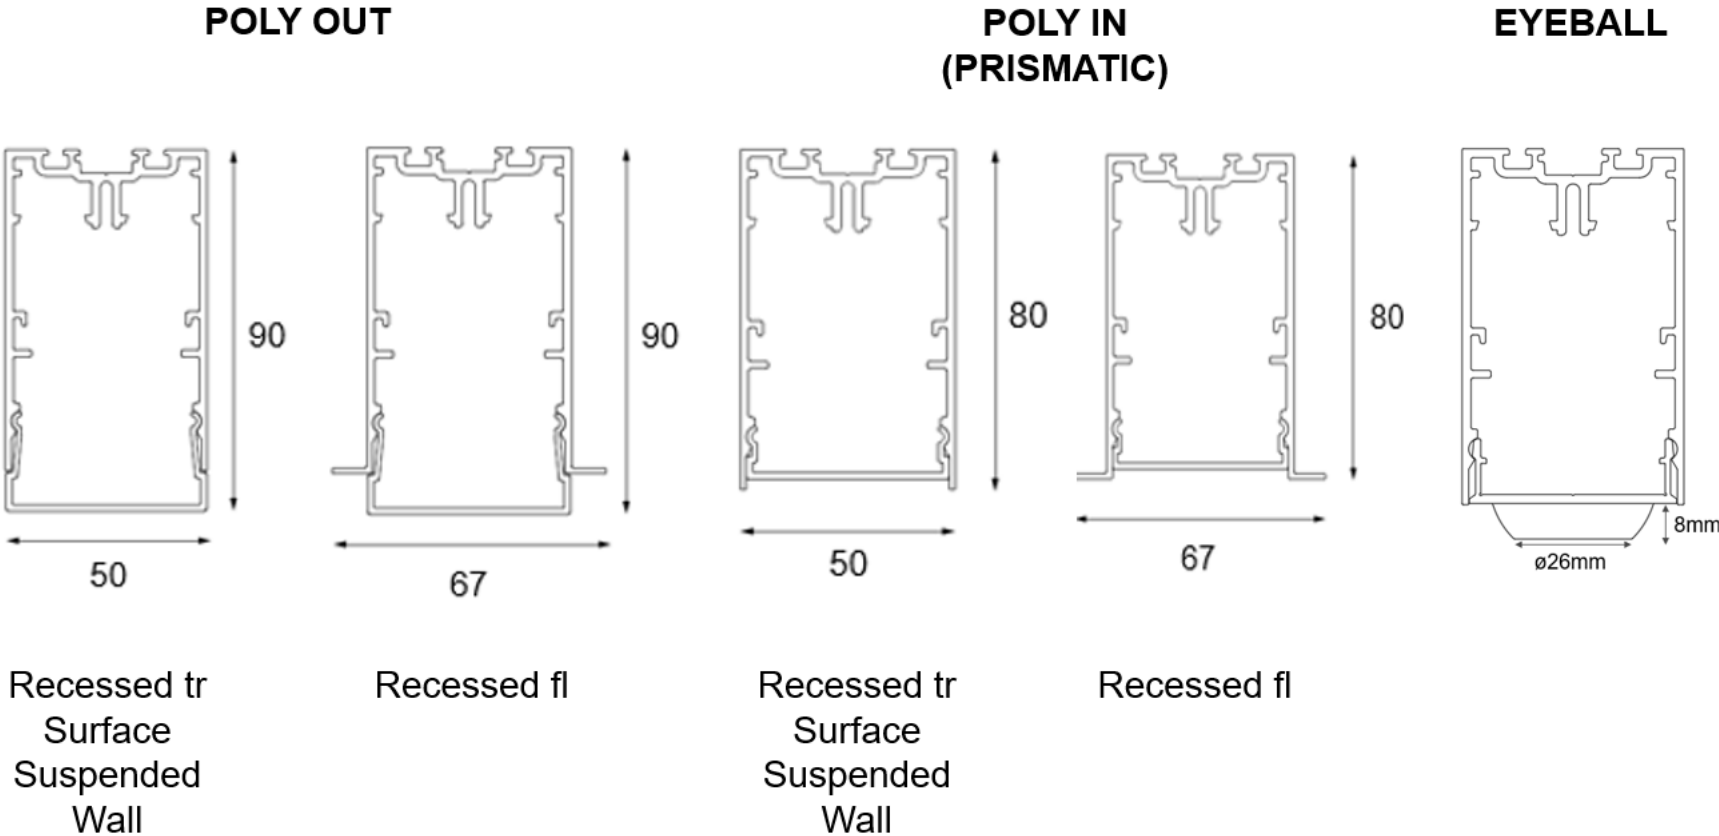

Colour options


Base/outer profile




Ano silver bronze



Ano champagne

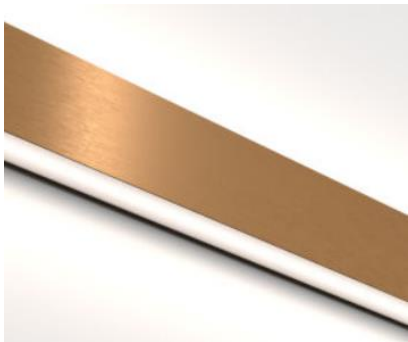

Ano bronze

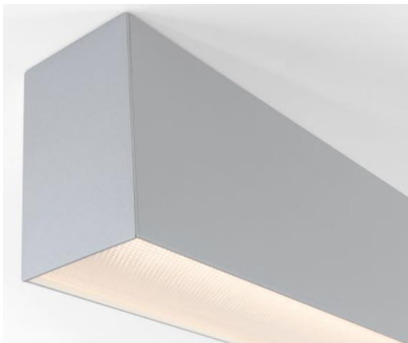

Alu




Black struc



White struc

Eyeball

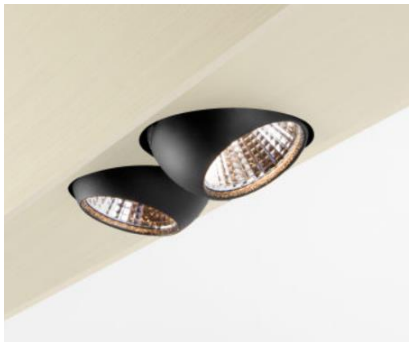

Black struc



White struc

Linear lighting down...

- LEDline (2 to 7 modules)
- LEDline preset at 75% light output (2 to 7 modules)
- LEDline preset at 50% light output (2 to 7 modules)
- With or without lens 50°






... or up

- Integrated uplight LED-strip
- Choose your preferred length



SLD50 (high) tunable white

Colour temperature

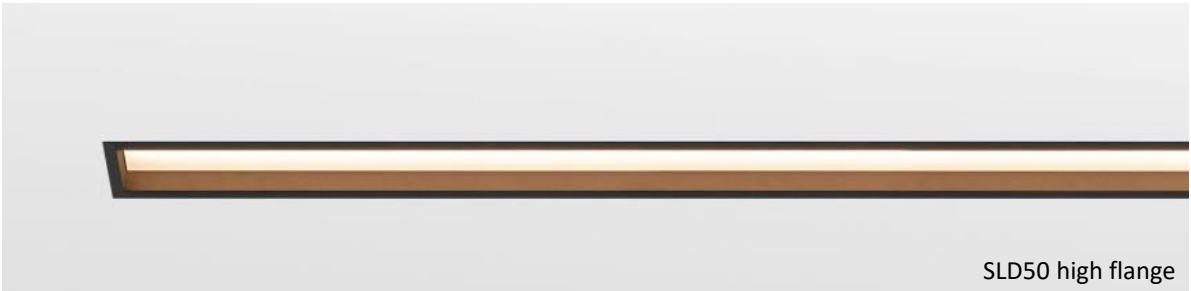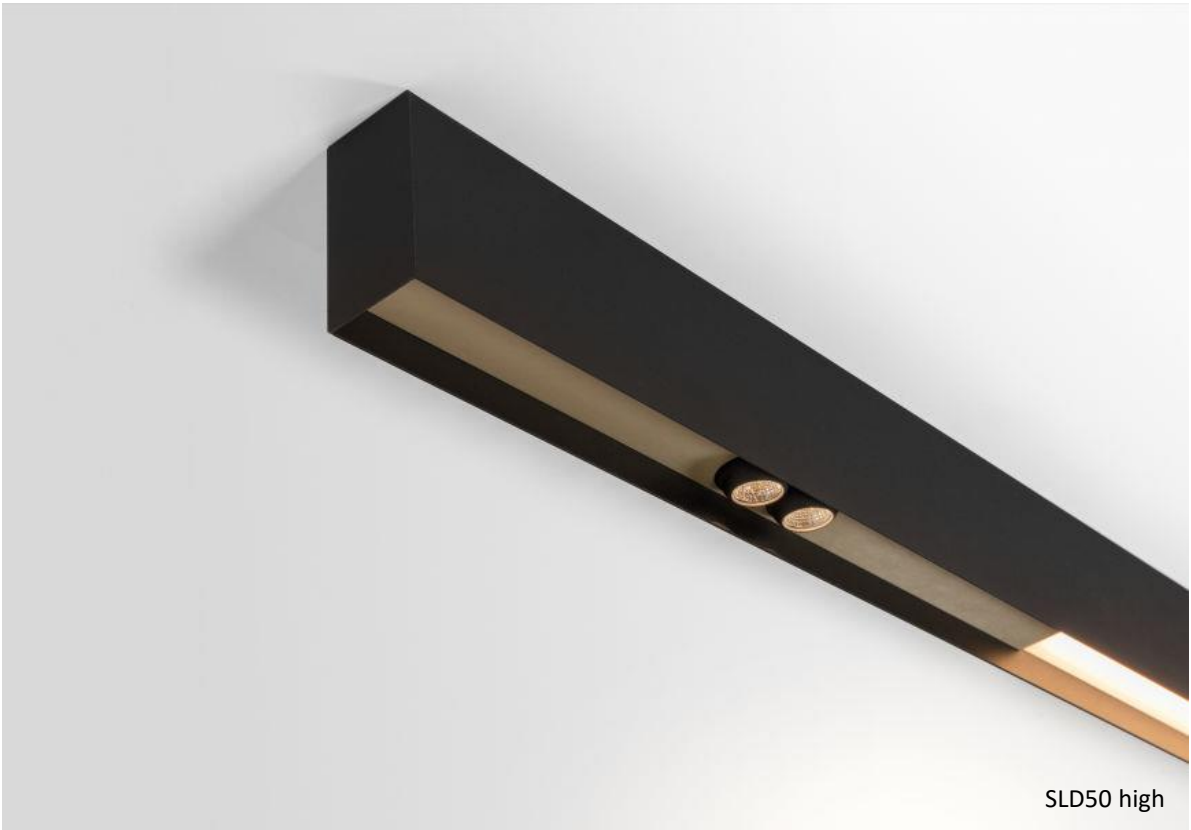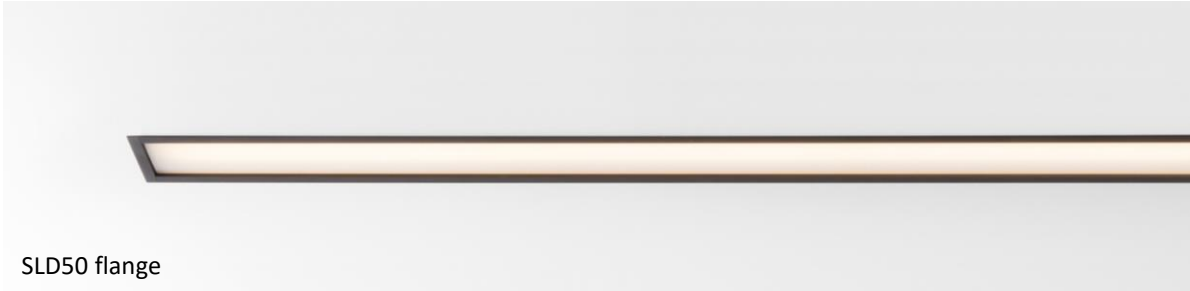



SLD50 (high) tunable white

Colour temperature | light intensity

The right light with the **right spectral content** at the right time

WORKSPACE

Cool light level

Raise energy level





SLD50 (high) tunable white

Colour temperature | light intensity

COFFEE BREAK

Cool to warm light

Decrease light levels

Have a break and refresh





SLD50 (high) tunable white

Colour temperature | light intensity

RELAXING SPACE

Warm light level

Decrease light level

Melatonin production



Spot lighting: eyeball

- +/- 30° orientation, 360° rotation
- 25° or 40° beam angle




Spot lighting: Modupoint

- Plug and play
- Combine with
 - Médard Jack
 - Marbulito Jack
 - Minude Jack
 - Modupoint sticks



SLD50 + Modupoint

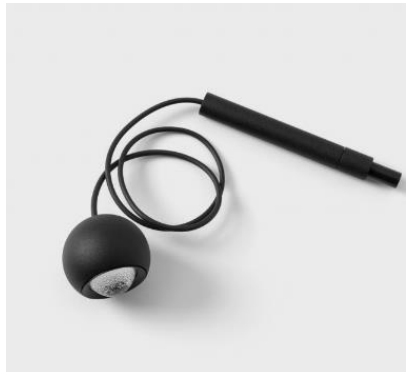


Accessories

- 90° connection to make angles
- 180° connection to configure > 4m
- Ultra-thin wall bracket
- Suspension wet with steel cable of max. 4m (alu / blstr / whstr)
- ActiLume DALI sensor (motion, daylight, infrared)
- Emergency unit

ActiLume

- ActiLume DALI based lighting control system designed for maximum comfort and energy savings up to 75%
- 3 sensors in 1
 - Movement detector
 - Light sensor for daylight depending control
 - Infrared for remote control
- Black, white or grey

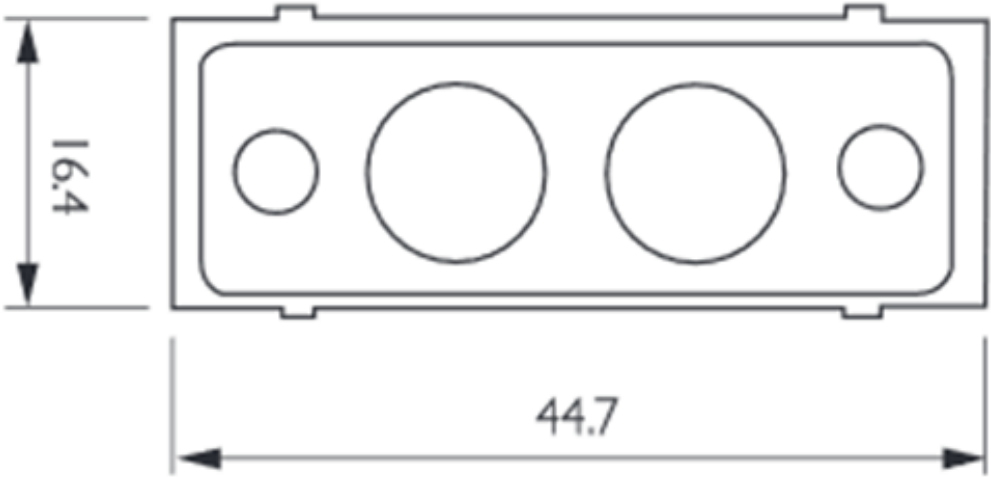


Emergency unit

- 3h autonomy (NiMH), up to 240lm, also for preset (75% - 50%) modules
- Minimum required profile length = 1200mm
- Selftest function with visible control (= only visual component)
- Fully integrated, no remote accessories
- DALI units on request




Power feed options

- Power feed kit = connection box + cable -> max length of 2m

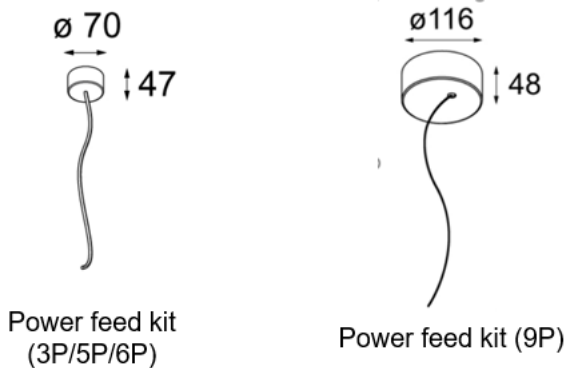

- Connection box + cable -> max length of 4m (= suspension set length)

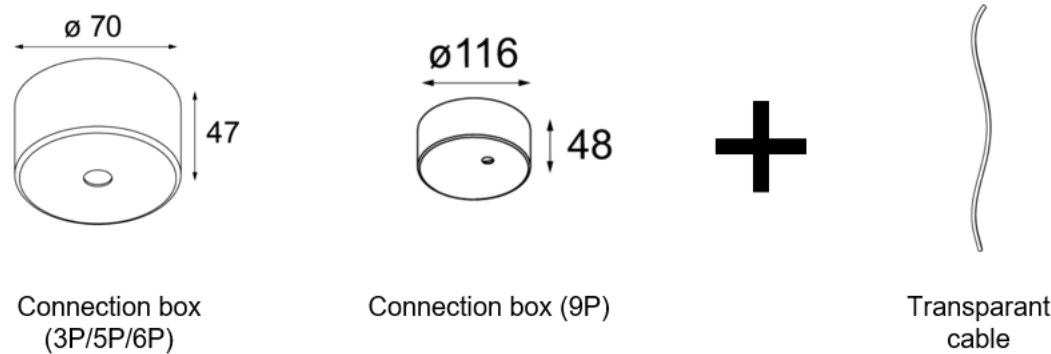

No visible screws

SLD50 endplate

1,5mm profile
thickness

Max. profile length
= 4000mm


Easy installation

- Height adjustment at profile level
- Suspension brackets are slidable over the complete profile length, even with uplight



Easy acces

Connections are easily accessible thanks to removable LED units

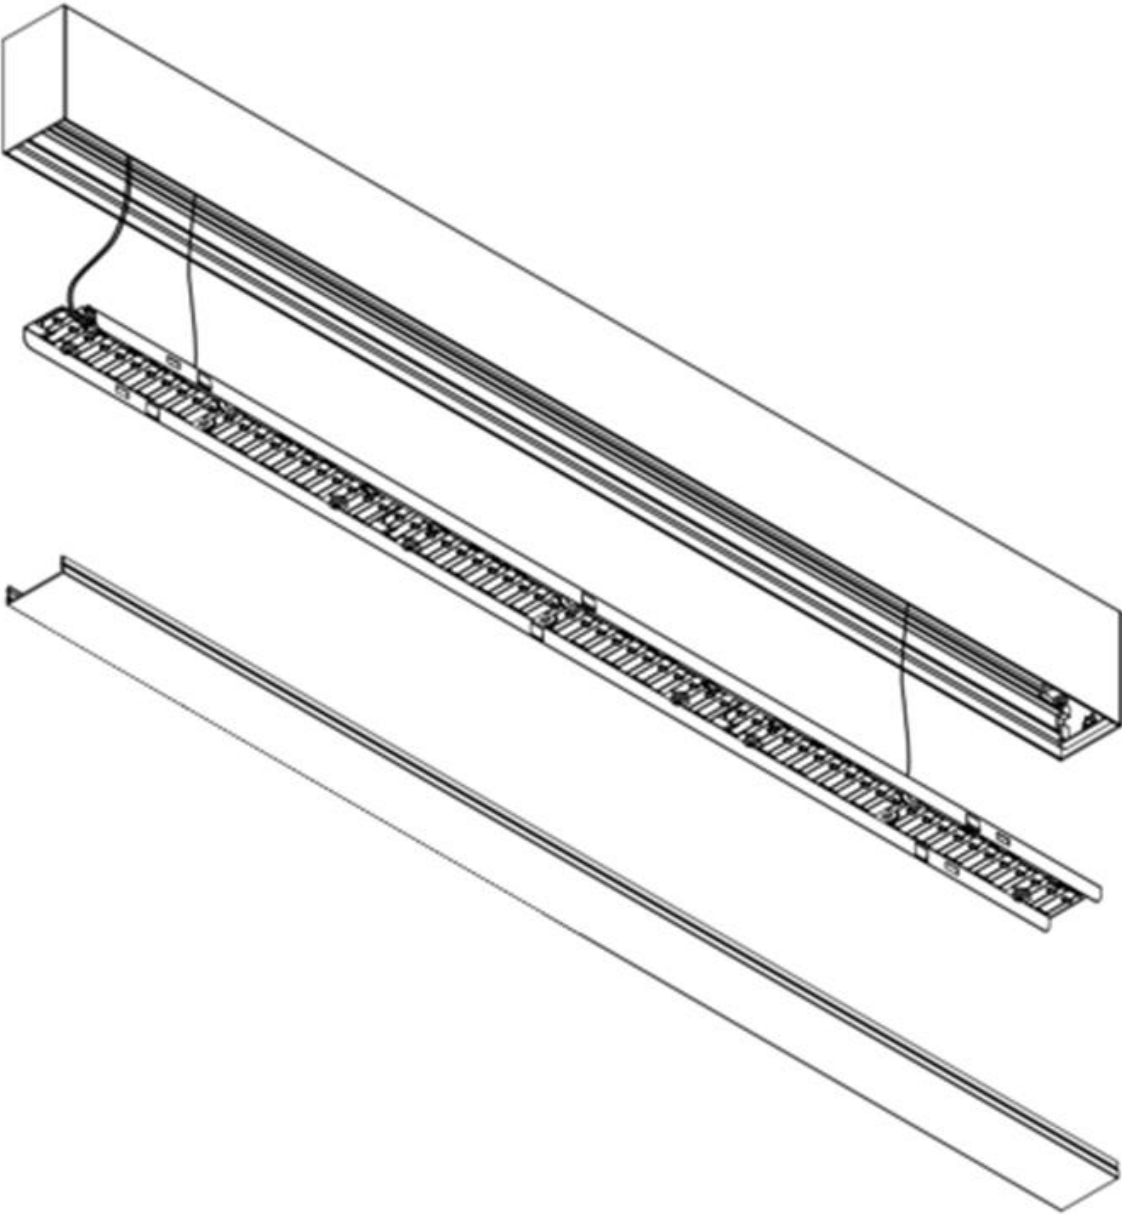



DESIGN

COLOURS THAT MATCH EVERY
INTERIOR

EXTRUDED DIFFUSER

DIECAST ENDPLATES AND
SUSPENSION BRACKETS



APPLICATION

RESIDENTIAL
HOSPITALITY
OFFICE
RETAIL

RECESSED, SURFACE,
SUSPENDED & WALL MOUNTING

180° AND 90° CONNECTIONS

EASY INSTALLATION



TECHNOLOGY

SMALL, POWERFUL AND
ADJUSTABLE SPOTLIGHT

SENSOR-BASED LIGHT CONTROL

EMERGENCY UNIT

CONSISTENT COLOUR
TEMPERATURES

GENERAL AND ACCENT LIGHTING

ACCURATE COLOUR RENDERING

















