
# SLD50 Naked



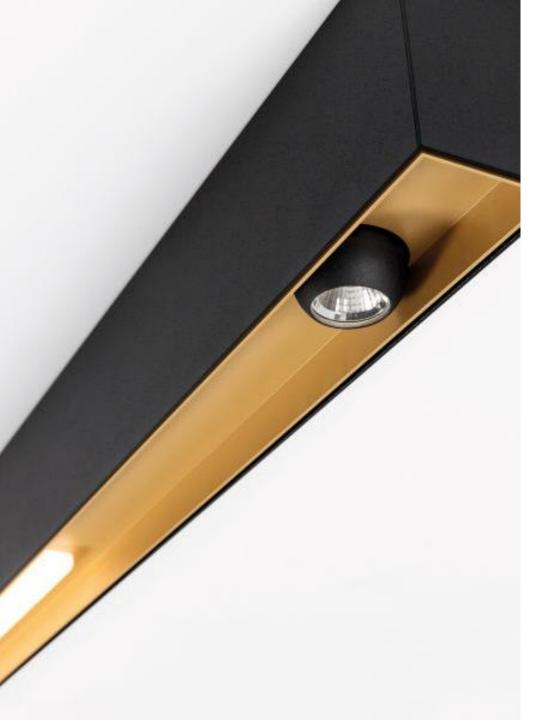

#### SLD50 Naked

Your lighting, your choice

#### About SLD50 Naked

- Straight Line Dedicated (for LED)
- **50**mm width
- Naked light source
- Entirely custom-made, full modularity







#### Market segments


- Residential
- Hospitality
- Retail

Classified

## Design




Mounting

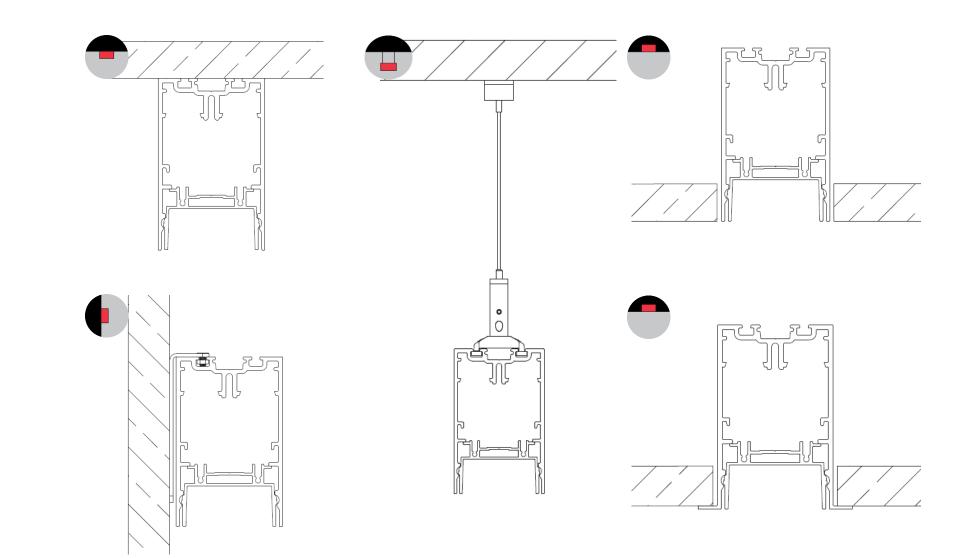




#### Dimensions

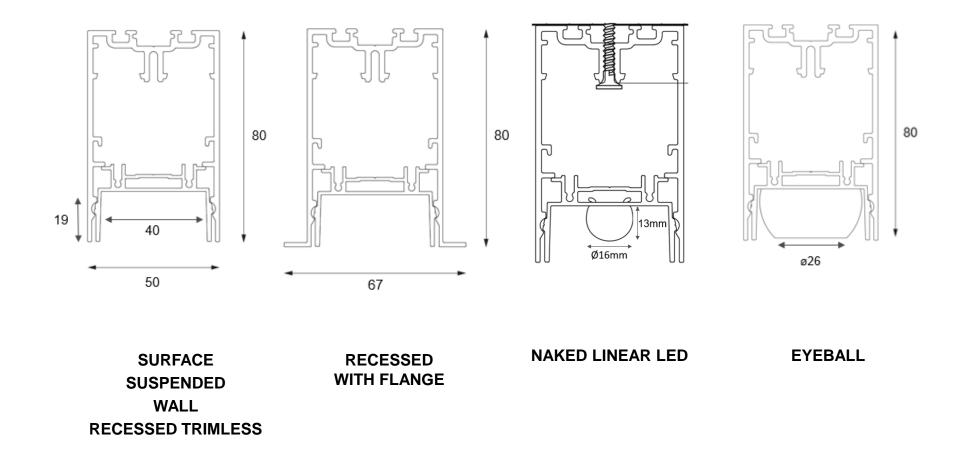




#### Colour options: outer profiles

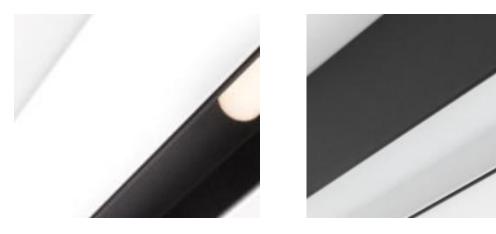

White struc

Black struc



Ano silver bronze

Ano bronze

MODULAR LIGHTING – INSTRUMENTS - all colours can be combined with each other

- other RAL-colours on demand

### Colour options: inner profiles and eyeballs

#### Inner profile

Eyeball



MODULAR LIGHTING – INSTRUMENTS

- all colours can be combined with each other - other RAL-colours on demand

#### Linear lighting down...

- Deep recessed naked inner profile
- Semih-recessed naked linear LED

- Tube: 3 lengths (930/1230/1530 mm)
- Min. distance between 2 tubes: 65 mm

• Profile: max. 4m without interruption





#### ... or up

- Continuous covered uplight LED-strip
- Choose your preferred length





### Spot lighting: eyeball


- Semi recessed position
- 1 or 2 lamps
- +/- 25° orientation, 360° rotation
- 25° beam angle





#### Spot lighting: Modupoint

- Plug and play
- Combine with Marbulito Jack
- Combine with Modupoint stick and
  - Médard Jack
  - Marbulito Jack
  - Minude Jack

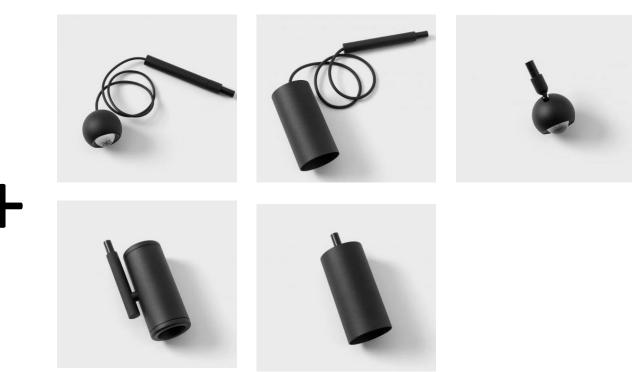



#### Accessories


- 90° connection to make angles
- 180° connection to configure > 4m
- Ultra thin wall bracket
- Suspension set with steel cable of max. 4m (alu, balc struc, white struc)






#### Power feed options

Power feed kit = connection box + cable -> max length of 2m •



Connection box + cable -> max length of 4m (= suspension set length) •

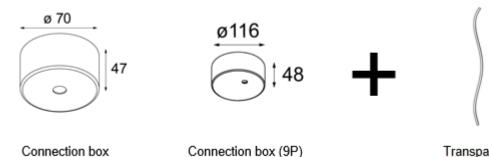




(3P/5P/6P)

Connection box (9P)



Design features

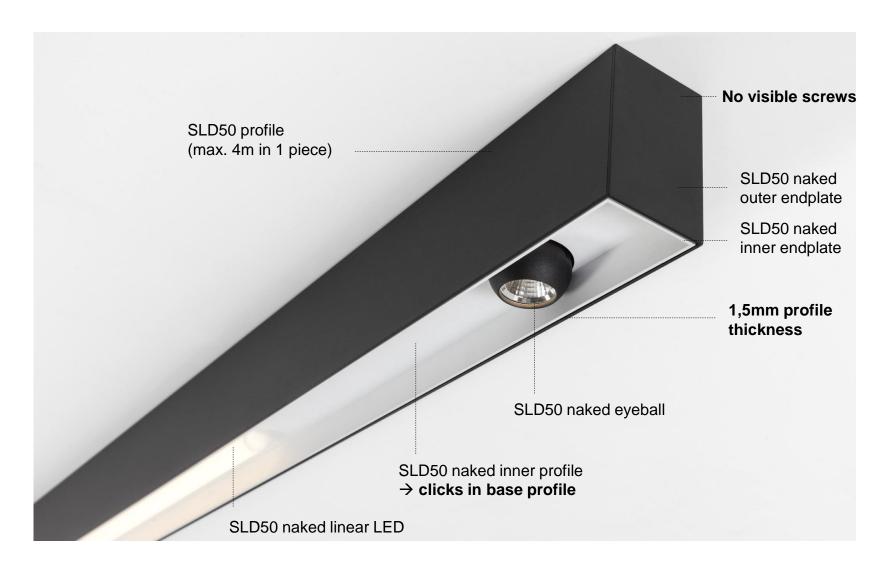




#### Easy installation

- Height adjustment at profile level
- Suspension brackets are slidable over the complete profile length, even with uplight
- Inner and outer profile click together





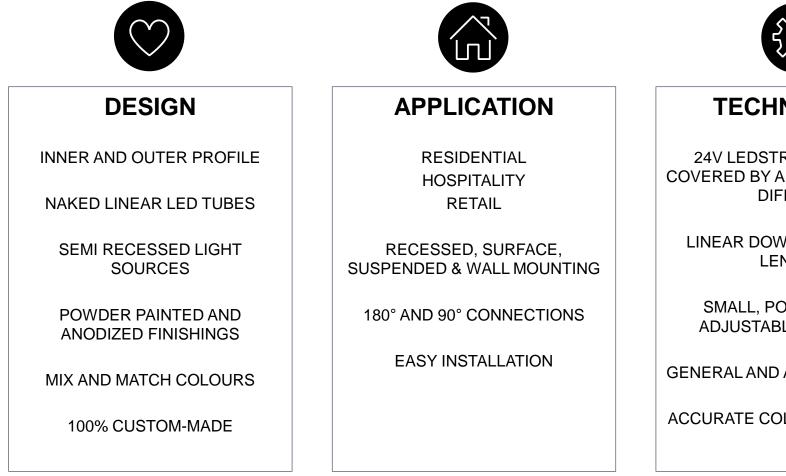



#### TECHNOLOGY

24V LEDSTRIP UPLIGHTER COVERED BY A POLYCARBONATE DIFFUSER

LINEAR DOWNLIGHTING IN 3 LENGTHS

SMALL, POWERFUL AND ADJUSTABLE SPOTLIGHT

GENERAL AND ACCENT LIGHTING

ACCURATE COLOUR RENDERING



## Inspiration

























