Thimble





Thimble

The bare essential

About Thimble

- Deep-recessed spot
- Curved, pure, minimalistic shape
- Made out of 1 aluminum sheet

Designer: Jeffrey Huyghe









Market segments


- High-end residential
- Hospitality

Design



Sizes and types

- Thimble 74 Flange
- Thimble 70 Trimless

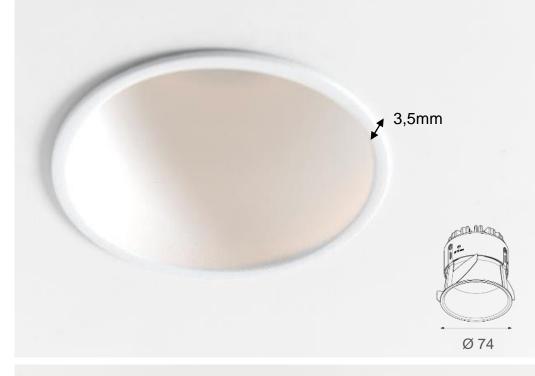





Fixed or adjustable

- Adjustable (h360° v30°) IP20
- **Fixed** IP55







Adjustable








Colours

BLACK

BRONZE


GOLD

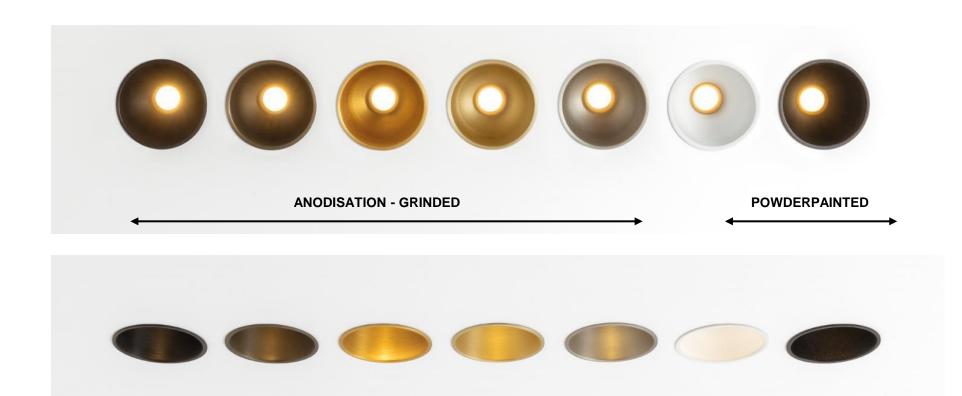

CHAMPAGNE SILVER BRONZE WHITE STRUC BLACK STRUC




Design features

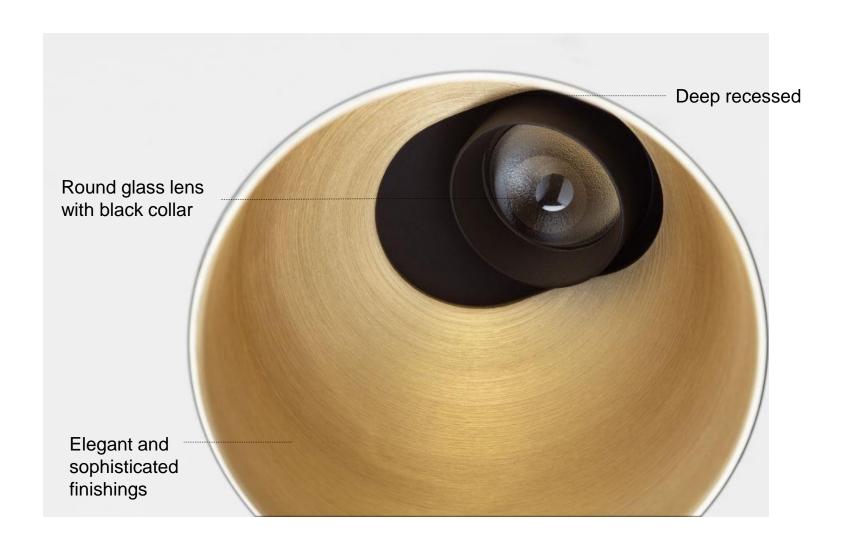






Installation accessories

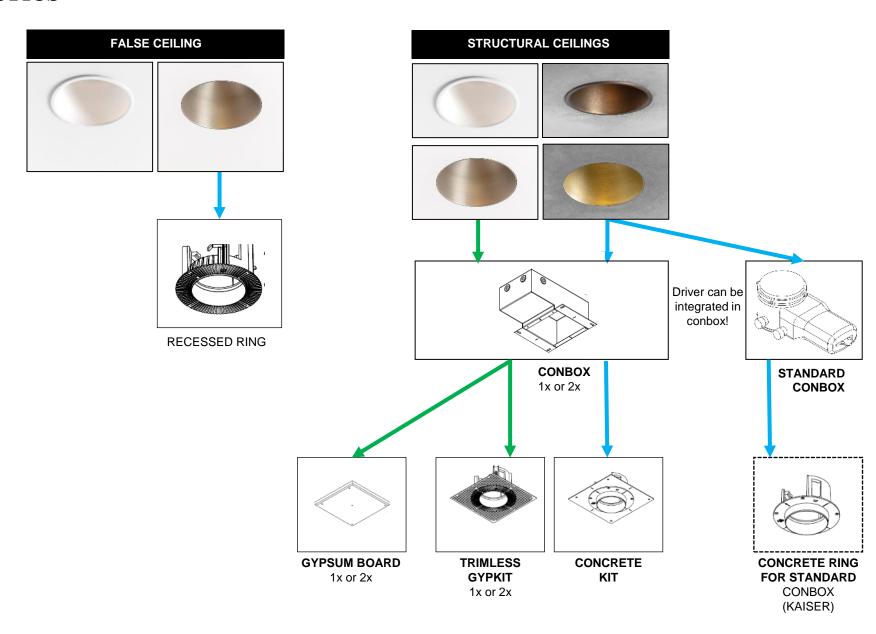




Thimble 74 – plastered concrete ceiling

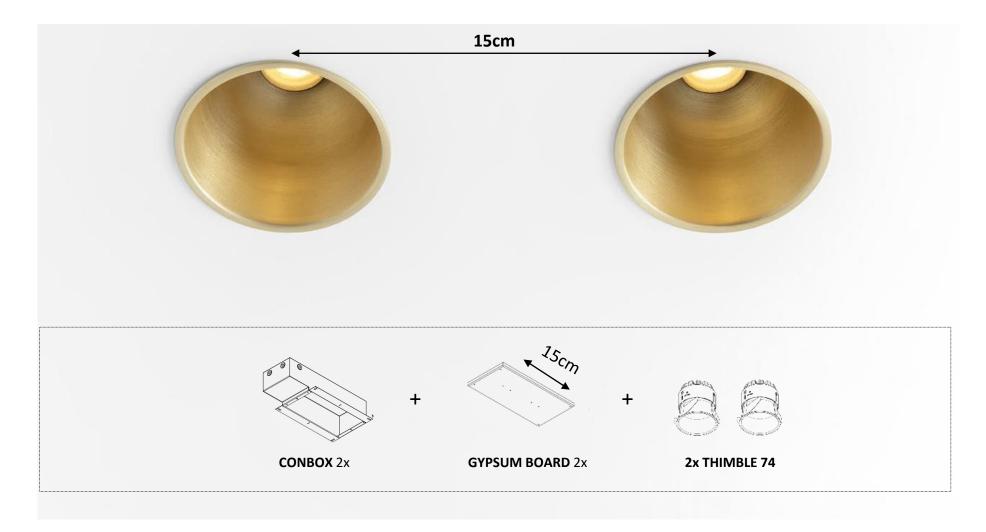




Thimble 70 trimless – plastered concrete ceiling

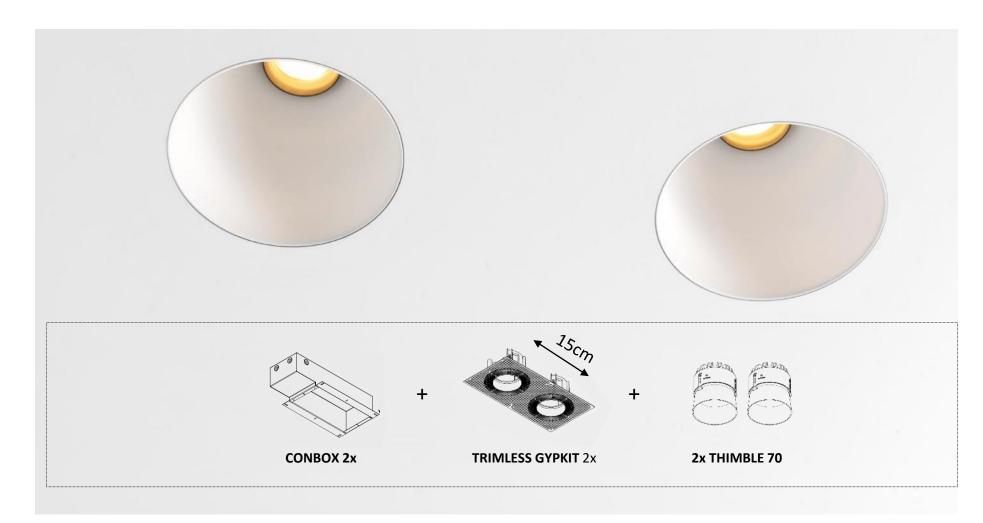



• Thimble 70 trimless – exposed concrete

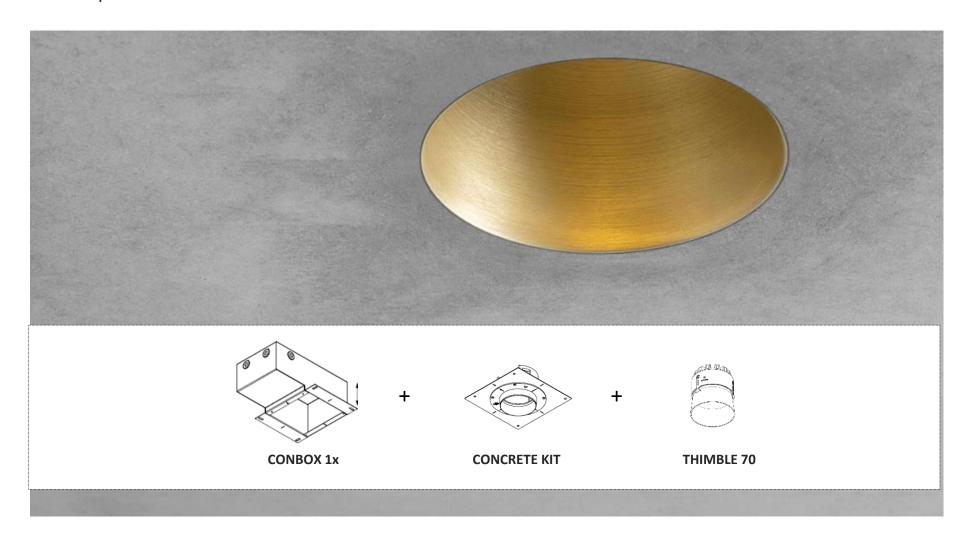





Specifications




Thimble fix	Thimble adj
2700K – 3000K	
CRI90+	
Lens 16° - Lens 30°	
1	30°
IP55	IP20
608 lm ⁽¹⁾	
8,5 W ⁽¹⁾	
72 lm/W ⁽¹⁾	
Non-dim 1-10V Dali	














(1) 3000K, white struc, 500 mA, medium (30°)







DESIGN

ULTRA THIN FLANGE OR TRIMLESS

7 SOPHISTICATED FINISHINGS CONNECTION WITH MINUDE

DEEP RECESSED LIGHT SOURCE



APPLICATION

HIGH END RESIDENTIAL HOSPITALITY

FIXED OR ADJUSTABLE LIGHTSOURCE

SAME SIZE FOR FIXED AND ADJUSTABLE

BROAD RANGE OF INSTALLATION ACCESSORIES

1 INSTALLATION HOLE FOR ALL



TECHNOLOGY

HIGH QUALITY LED AND ASPHERICAL GLASS LENS

LOW INSTALLATION DEPTH

MEDIUM OR SPOT BEAM

ACCURATE COLOUR RENDERING

CONNECTED LIGHTING



Inspiration









