

Tetrix



Tetrix

Made to play. Make it you.

About Tetrrix

- Modularity at its best
- Matt or black chrome finish





Market segments

- Residential
- Hospitality
- Retail
- Office

Building blocks



Aluminum heatsink for
optimal cooling

High luminous efficacy
of 116 lm/W

TIR lens

Aluminum frontring






1st click function:
Frame or trimless ring

2nd click function
LED module

3rd click function
optical accessories

Polycarbonate
design

Wet paint

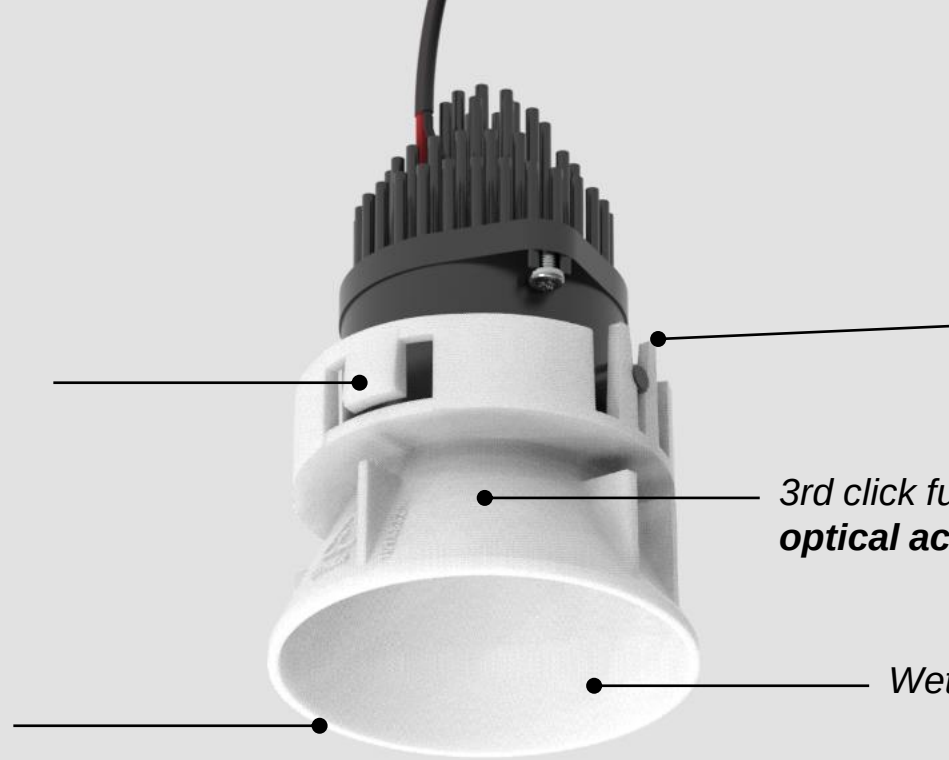


Optical




REFLECTOR
Smart




TIR LENS
Tetrix

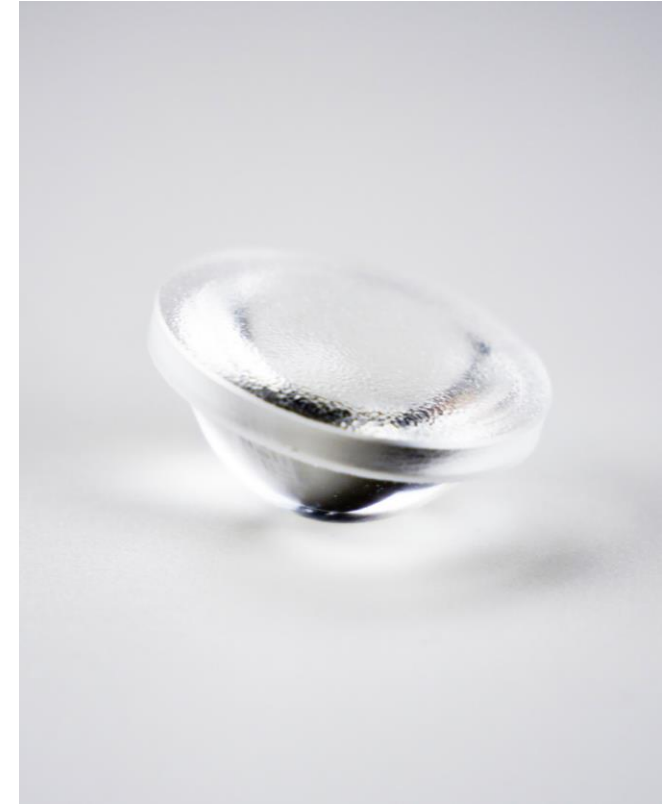


ASPHERICAL LENS
Thimble

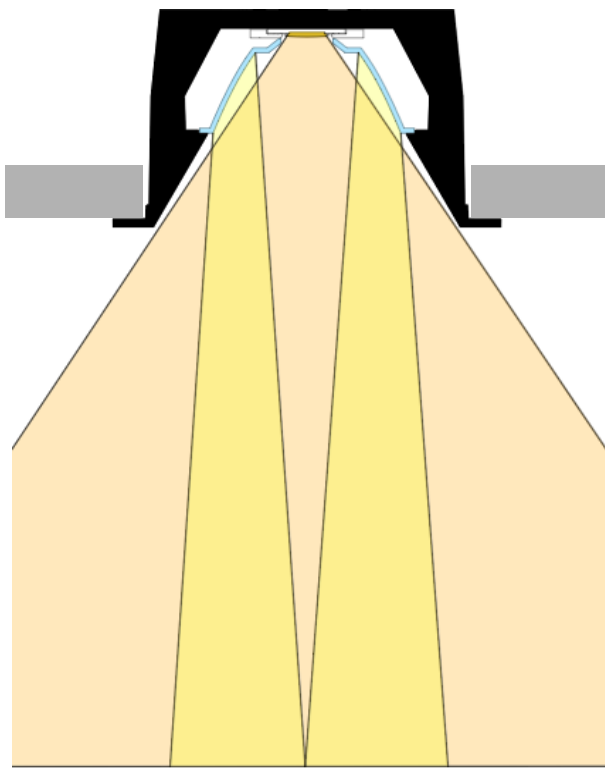

REFLECTOR 25°
direct light + reflected light
LED 773 lm
589 lux in the center at 2m

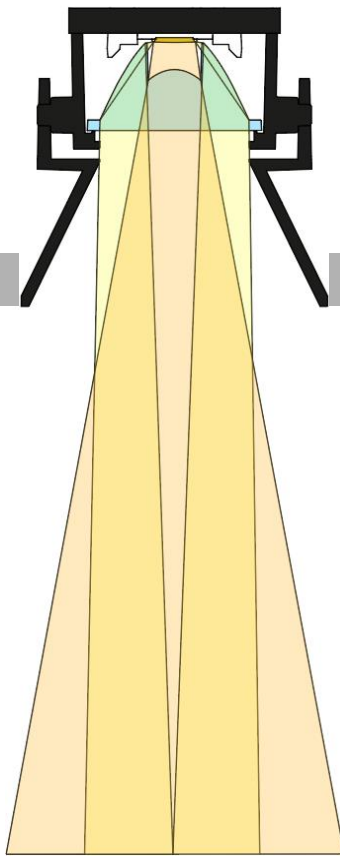

TIR LENS 25°
Total inner reflection
LED 712 lm
753 lux in the center at 2m

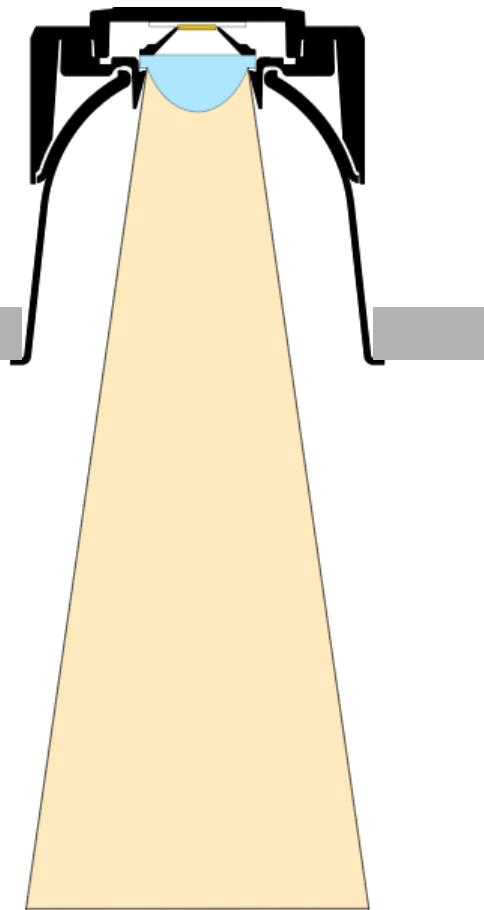

ASPHERICAL LENS 30°
Projected light
LED 984 lm
622 lux in the center at 2m



REFLECTOR 25°
Smart



TIR LENS 25°
Tetrix



ASPHERICAL LENS 30°
Thimble

5 designs

Straight



Oblique

Adjustable

Pinhole

Cone


STRAIGHT

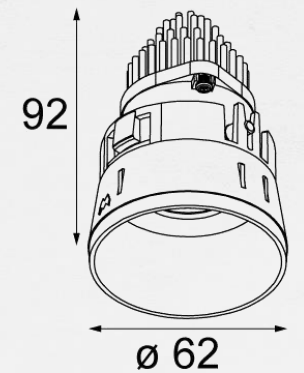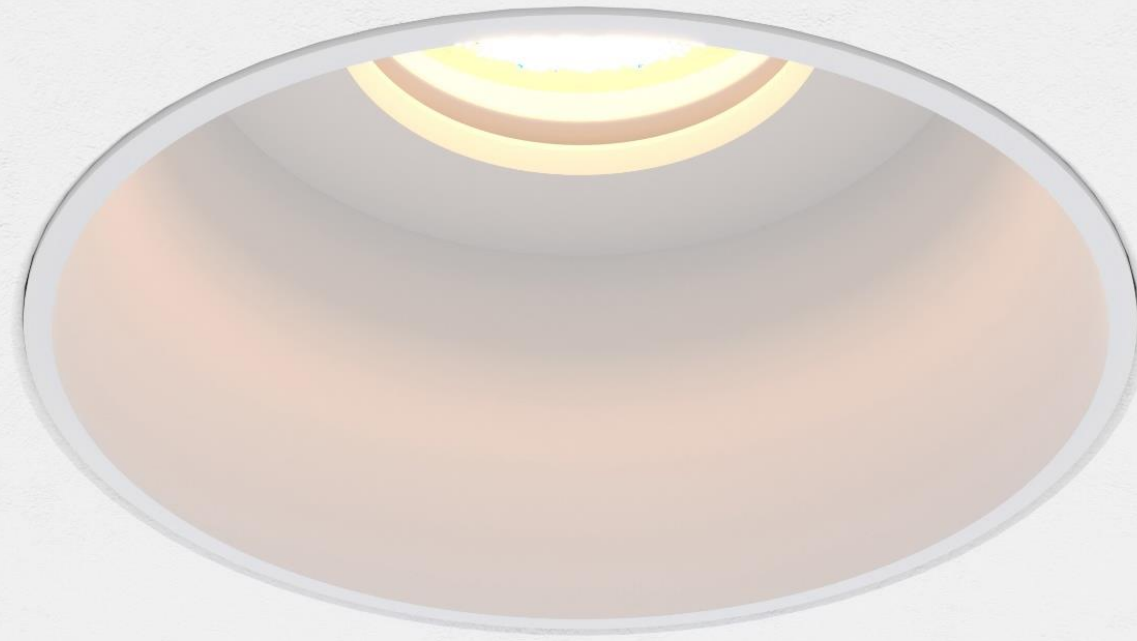

STRAIGHT



STRAIGHT

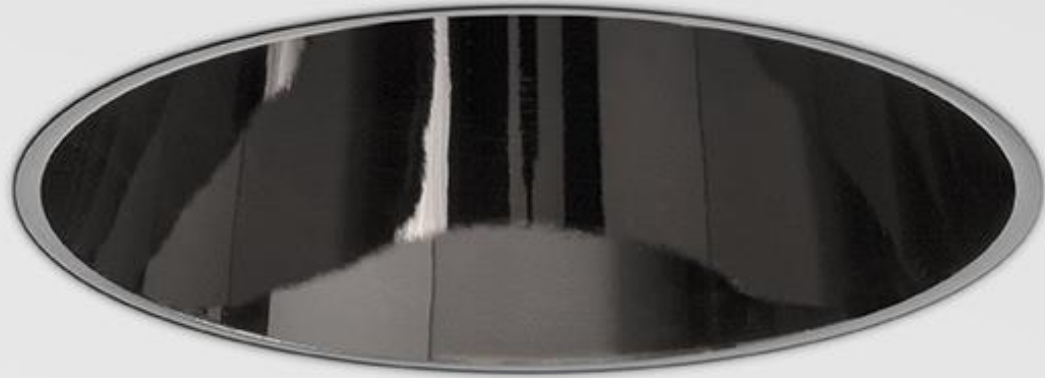

Tetrix | Tube





TETRIX TUBE | TETRIX STRAIGHT



STRAIGHT

Flange



Honeycomb Ø33



Snoot Ø32



LC Ø44



LC Ø64

STRAIGHT

Flange



Honeycomb Ø33



Snoot Ø32



LC Ø44



LC Ø64

STRAIGHT


Trimless




Honeycomb Ø33



Snoot Ø32



LC Ø44

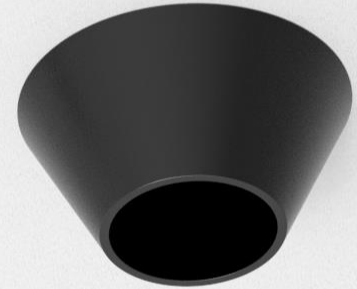

LC Ø64

STRAIGHT

LC ø44



STRAIGHT
LC ø44





STRAIGHT
LC ø64





STRAIGHT
LC ø44



STRAIGHT

Snoot



STRAIGHT Snoot



STRAIGHT
Honeycomb



5 designs

Straight



Oblique

Adjustable


Pinhole

Cone

OBLIQUE

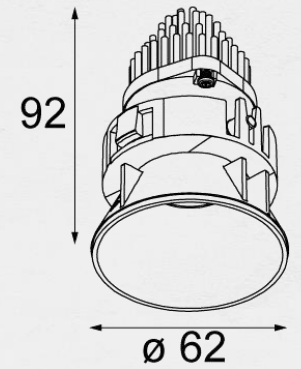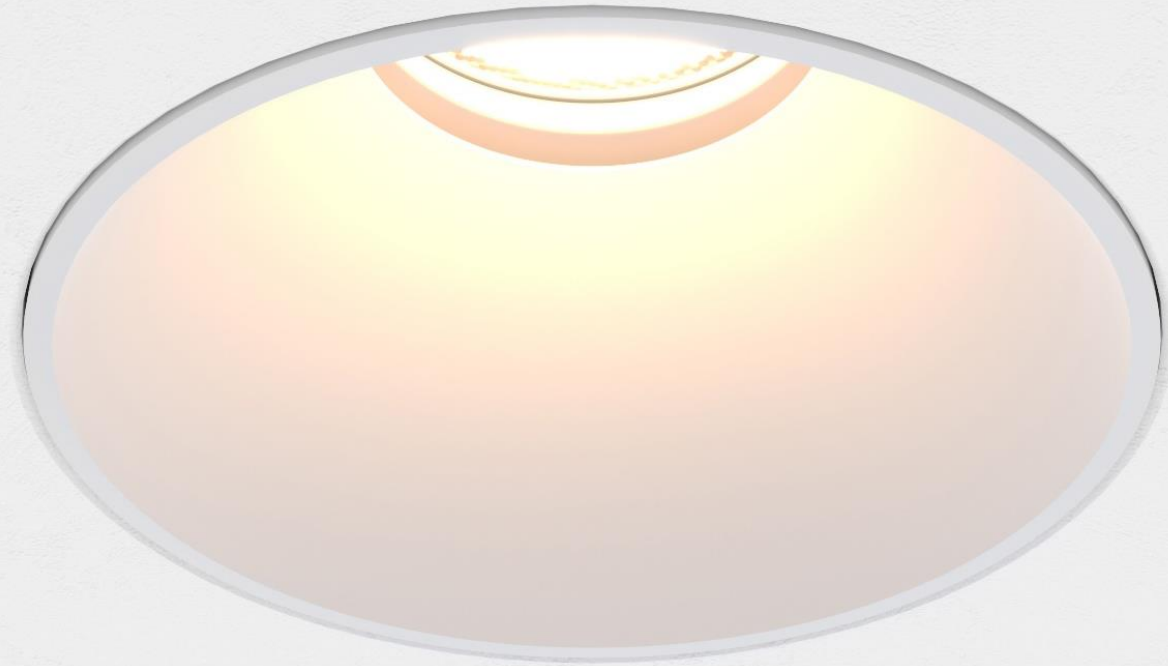

OBLIQUE

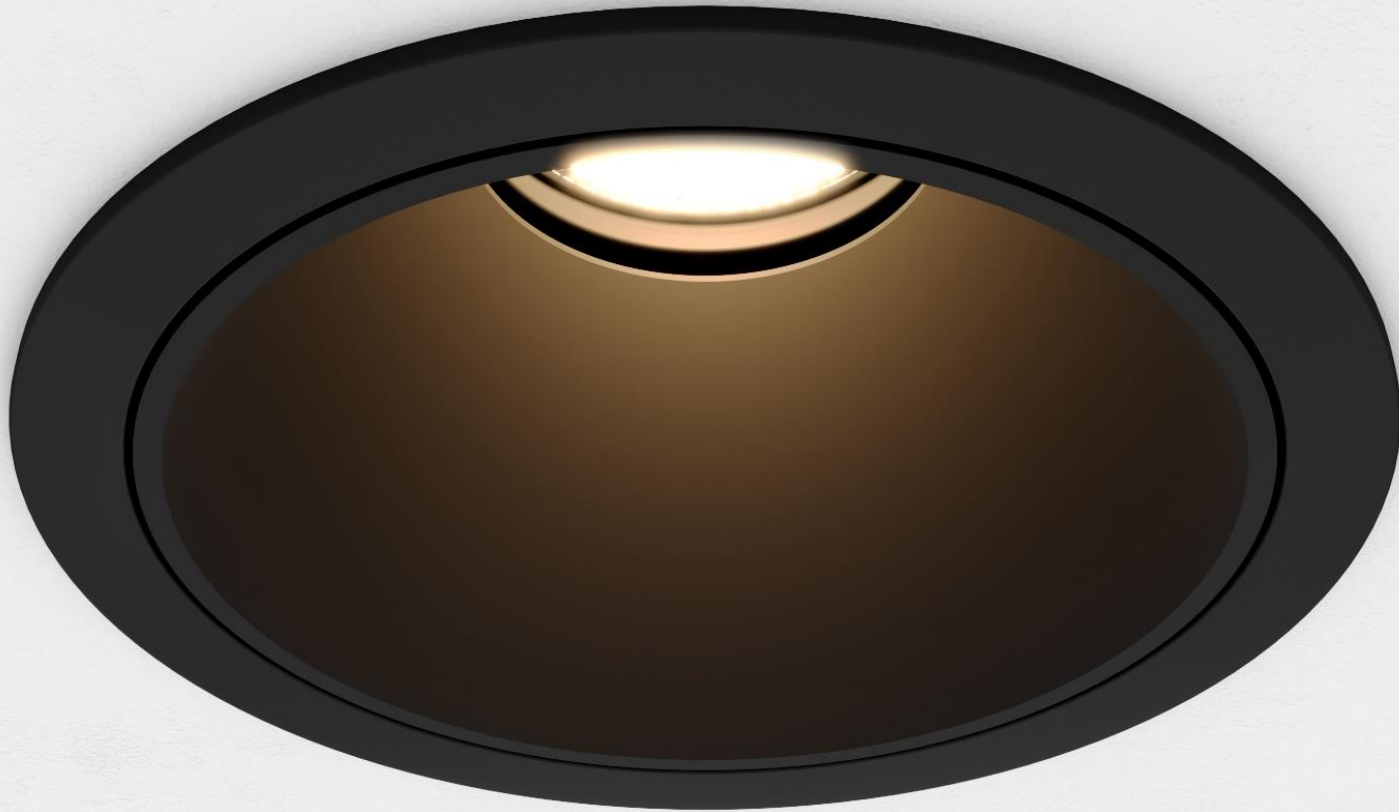

OBLIQUE







OBLIQUE

Flange



Honey Comb Ø33



Snoot Ø32



LC Ø44

OBLIQUE

Flange



Honey Comb Ø33



Snoot Ø32



LC Ø44

OBLIQUE


Trimless



Honey Comb Ø33



Snoot Ø32



LC Ø44

OBLIQUE
Honeycomb



OBLIQUE

Snoot




OBLIQUE

Snoot



OBLIQUE

LC ø44

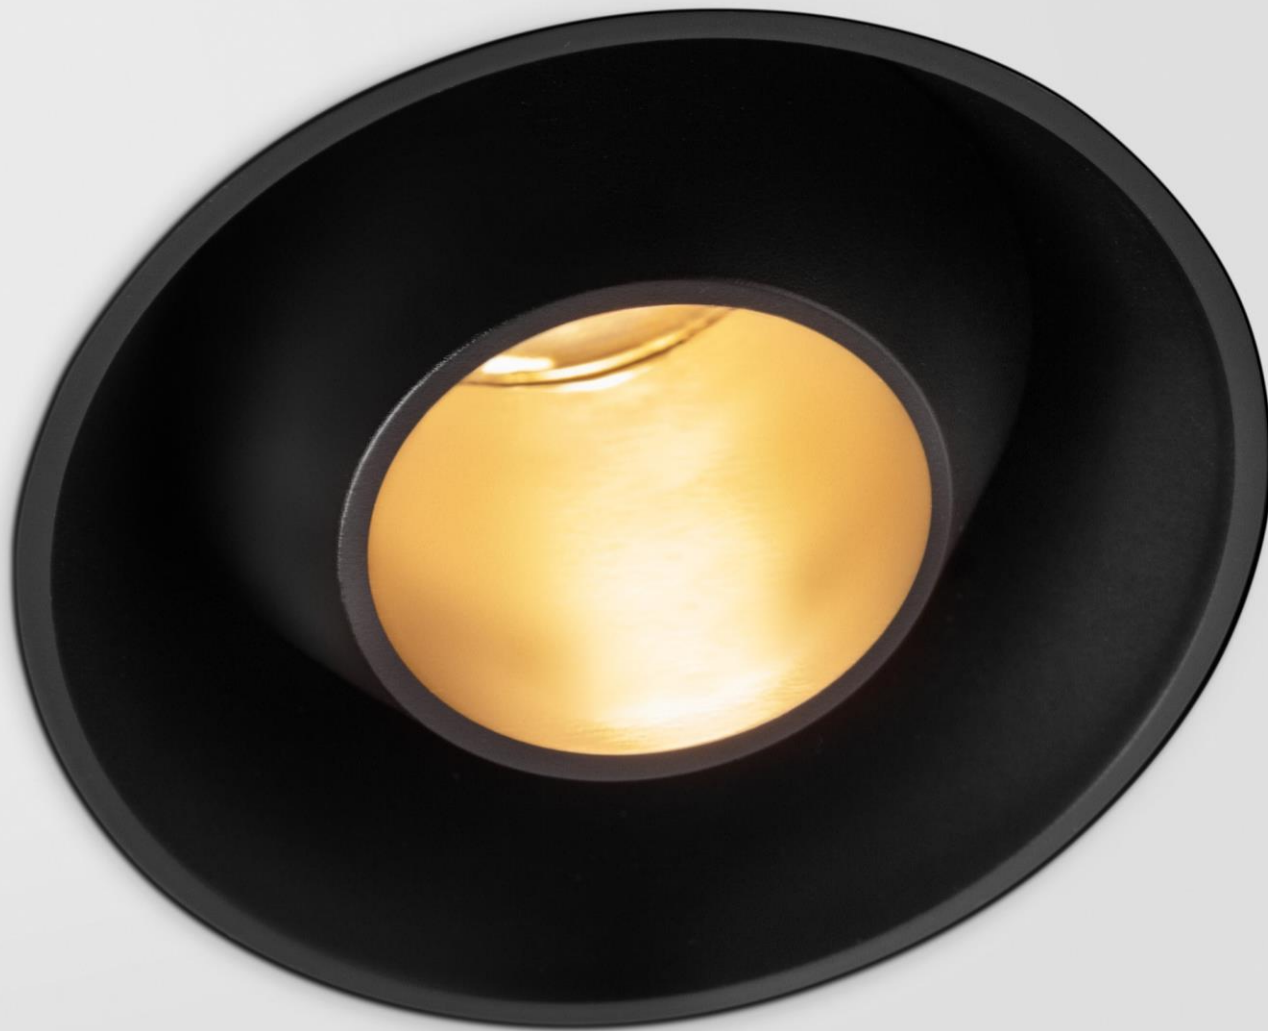

OBLIQUE

LC ø44



OBLIQUE

LC ø44



5 designs

Straight


Oblique

Adjustable

Pinhole

Cone

ADJUSTABLE

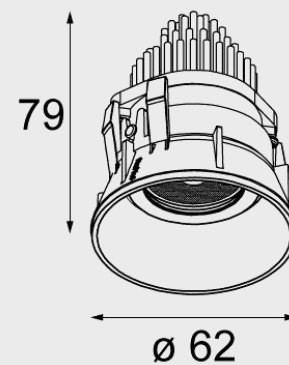

ADJUSTABLE



ADJUSTABLE



ADJUSTABLE Flange



Honey Comb Ø33



Snoot Ø32

ADJUSTABLE Flange



Honeycomb Ø33



Snoot Ø32

ADJUSTABLE Flange



Honeycomb Ø33



Snoot Ø32

ADJUSTABLE

Trimless



Honeycomb Ø33



Snoot Ø32

ADJUSTABLE Snoot



ADJUSTABLE Snoot



ADJUSTABLE Snoot



ADJUSTABLE
Honeycomb



5 designs

Straight


Oblique

Adjustable


Pinhole

Cone

PINHOLE

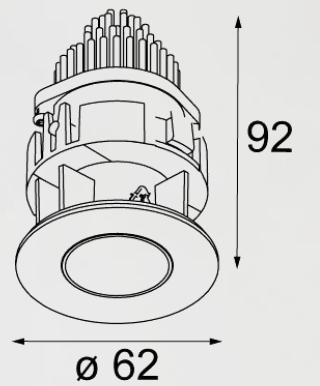

PINHOLE

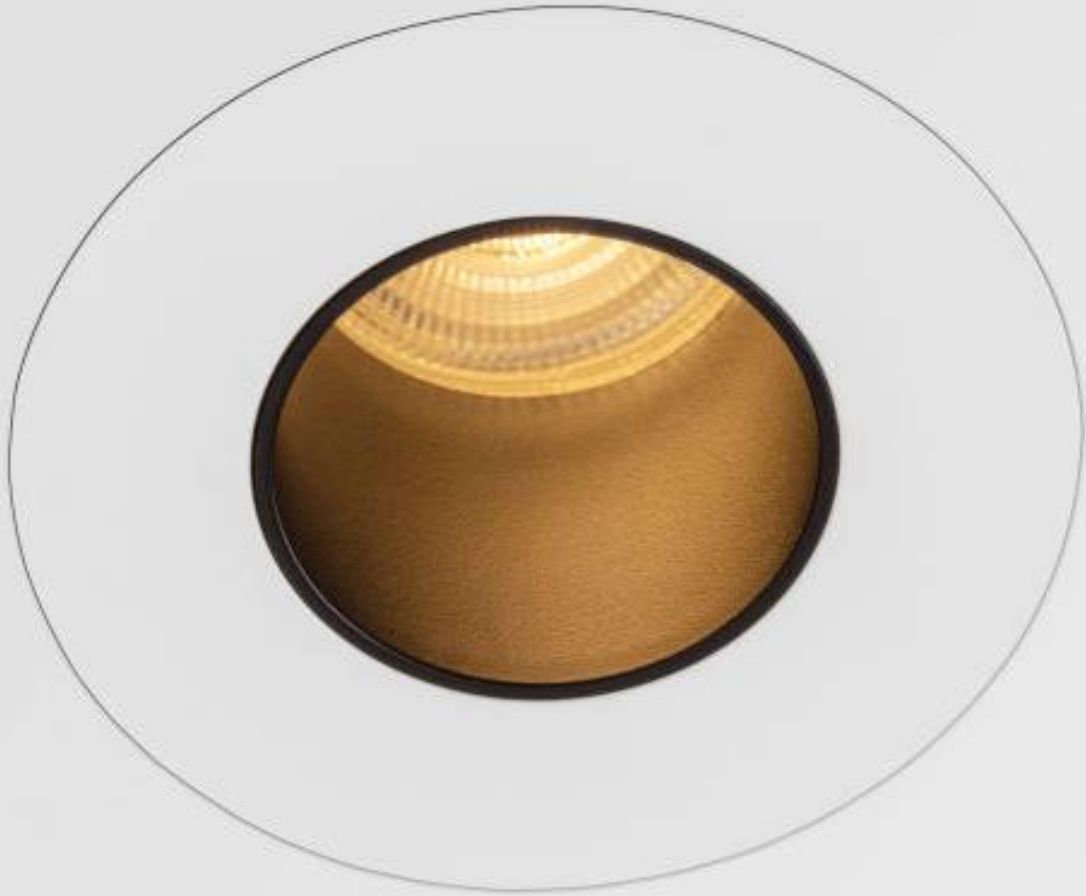

5 designs

Straight


Oblique

Adjustable

Pinhole

Cone

CONE




CONE



CONE




CONE

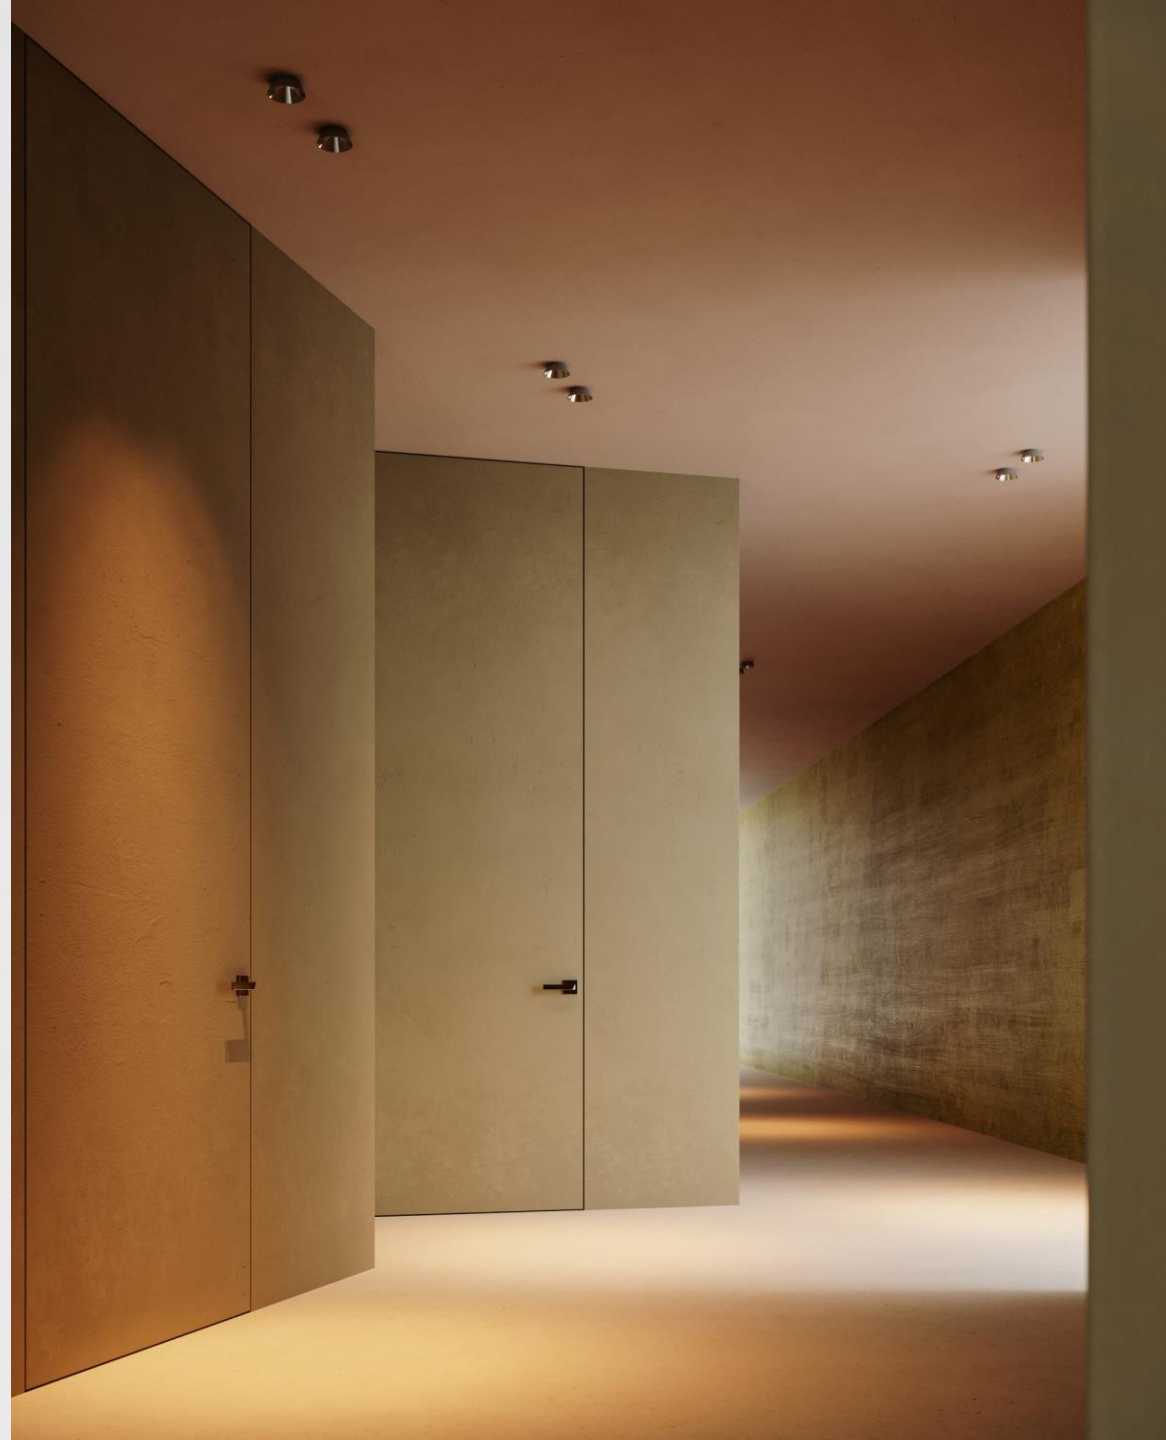



TETRIX TUBE | TETRIX CONE



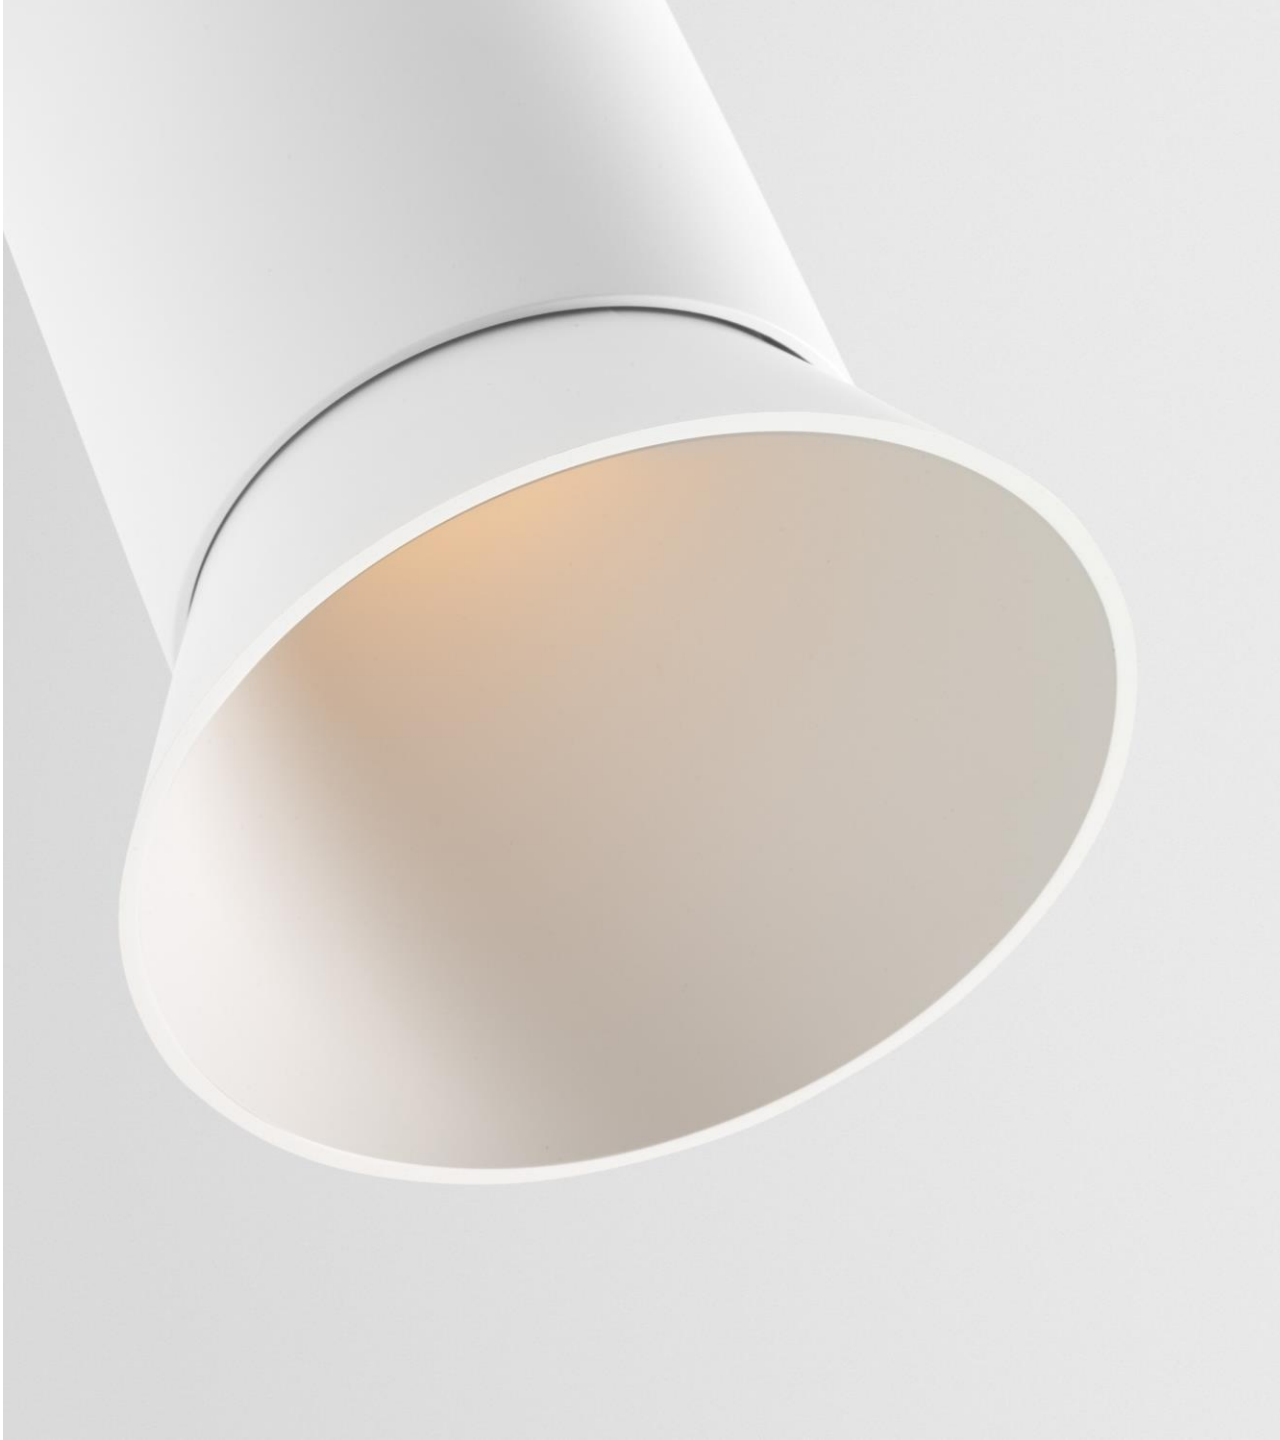



CONE Flange



Honey Comb Ø33



Snoot Ø32



LC Ø44

CONE Flange



Honey Comb Ø33



Snoot Ø32



LC Ø44

CONE


Trimless



Honey Comb Ø33



Snoot Ø32

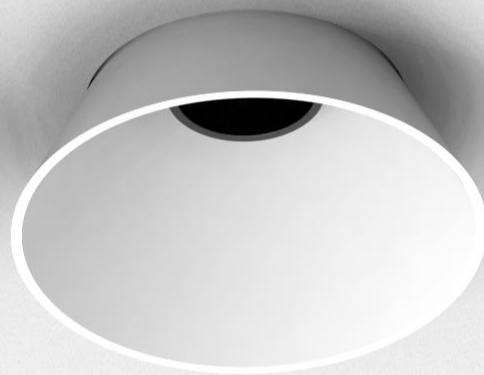


LC Ø44

CONE
LC ø44



CONE
LC ø44

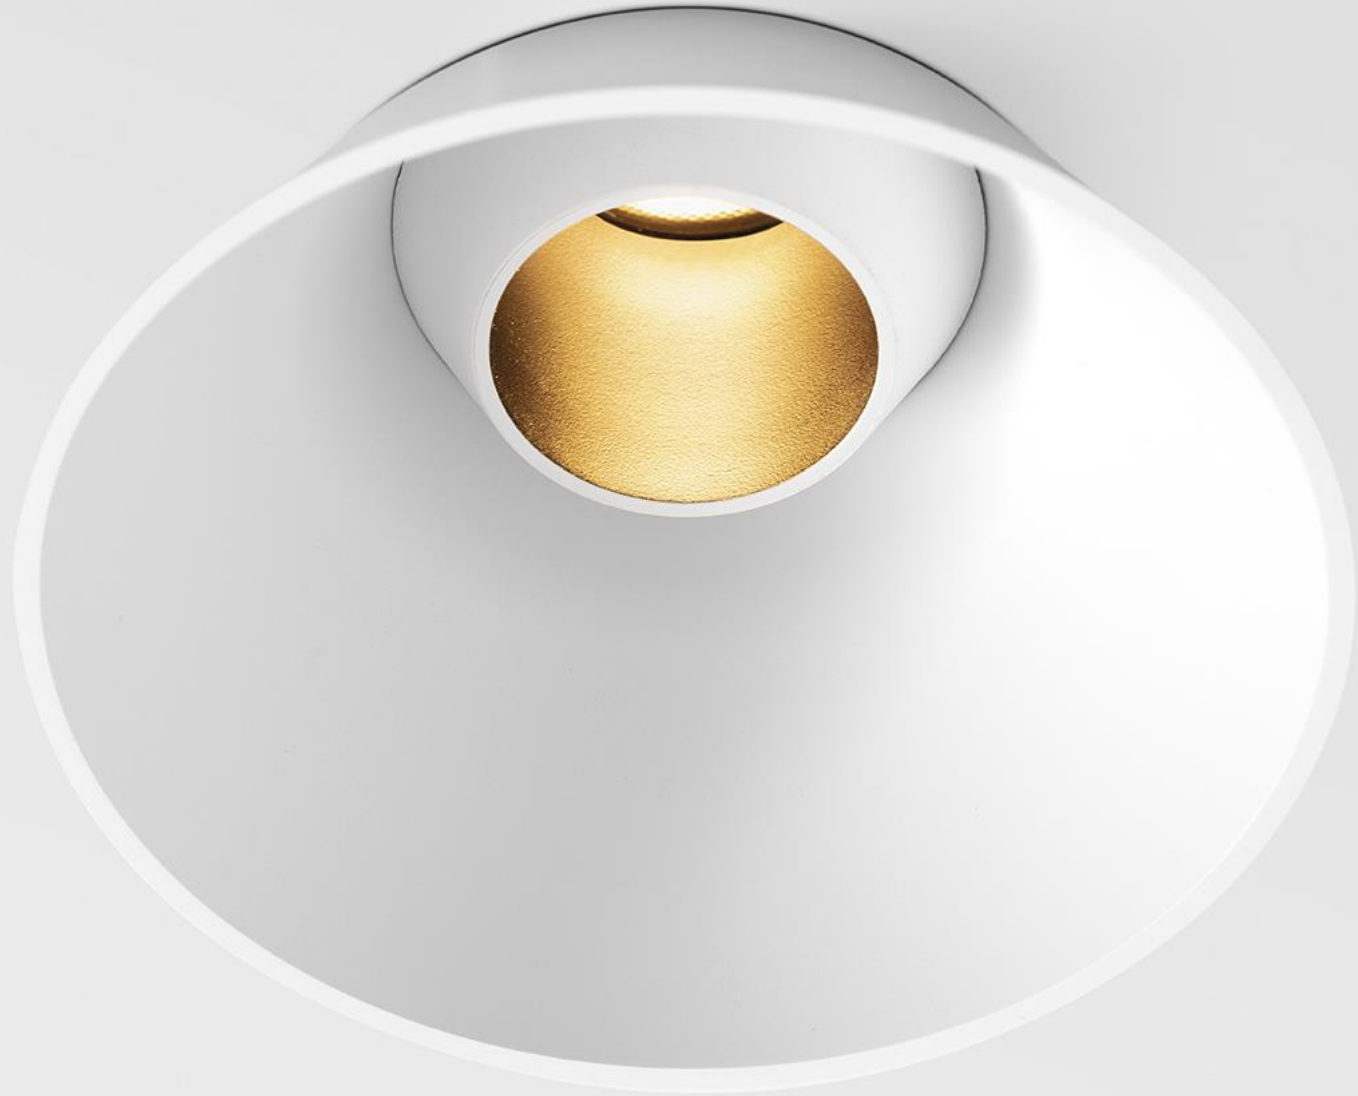

CONE

Honeycomb






CONE Snoot



CONE


Snoot

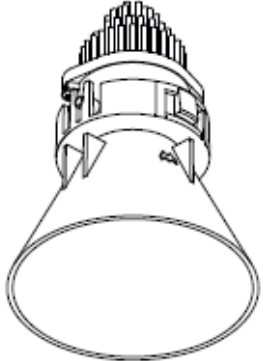

TETRIX OPTICAL ACCESSORIES COMPATIBILITY OVERVIEW	TETRIX STRAIGHT 62	TETRIX OBLIQUE 62	TETRIX CONE 62	TETRIX ADJUSTABLE 62	TETRIX PINHOLE 62
					
	HONEYCOMB Ø33 13616132 				
	SNOOT Ø32 13616032 				
	LC Ø44 13616232 				
	LC Ø64 13616332 				


Installation accessories

Tetrix | Tube




NOT COMPATIBLE WITH TETRIX GU10


Tetrix | Tube




IP20

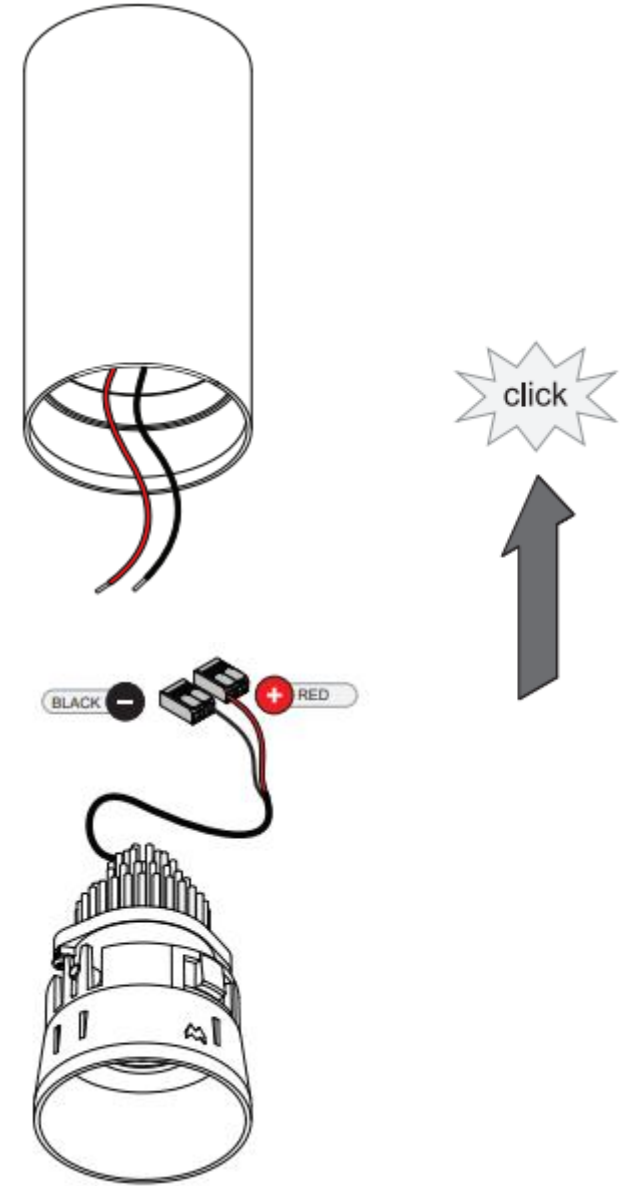

NOT COMPATIBLE WITH TETRIX GU10



IP55

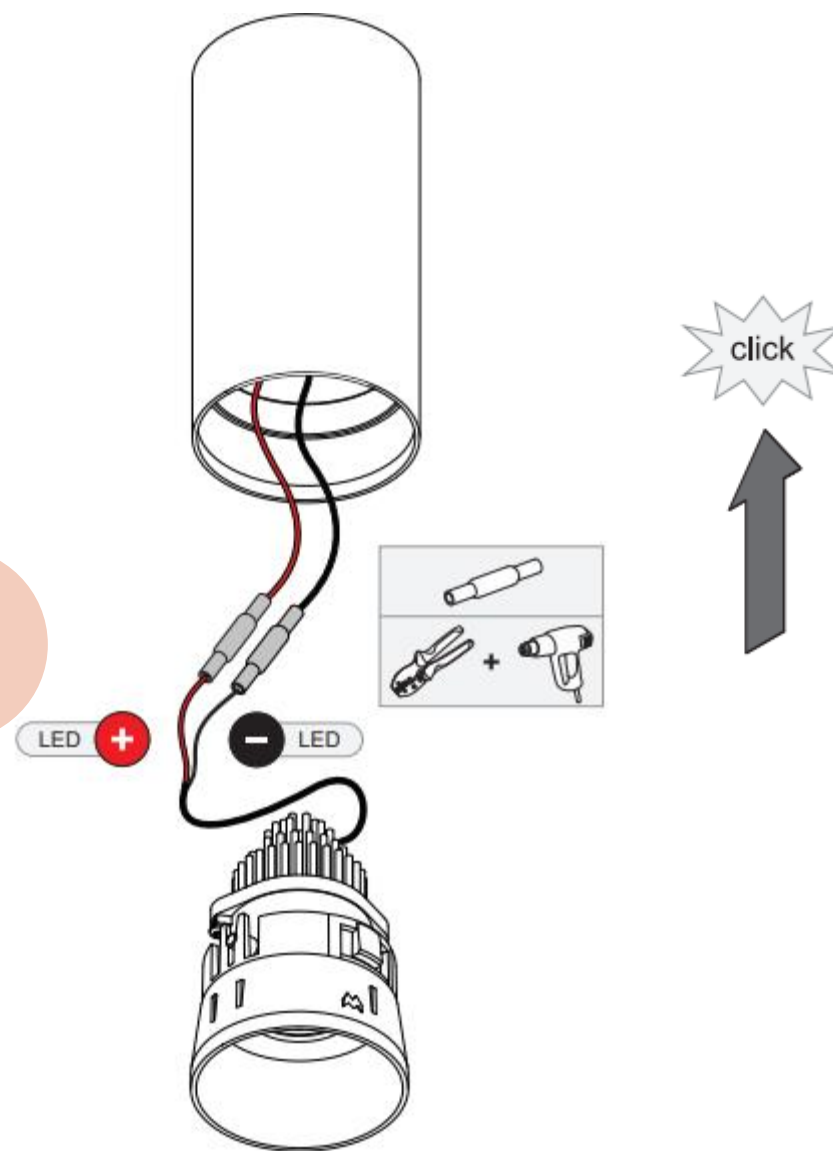

NOT COMPATIBLE WITH TETRIX GU10

FALSE CEILING




flange

trimless



frame round

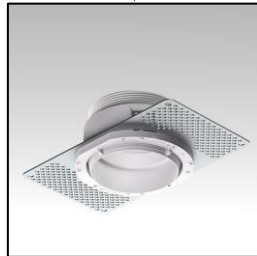

recessed ring

STRUCTURAL CEILING + PLASTER FINISH




flange

trimless




frame round

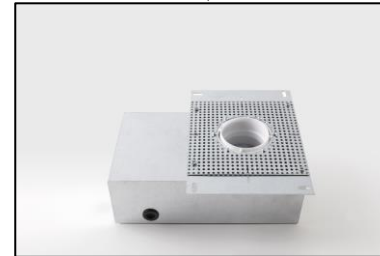


Conbox + gypkit trimless

EXPOSED CONCRETE CEILING



trimless

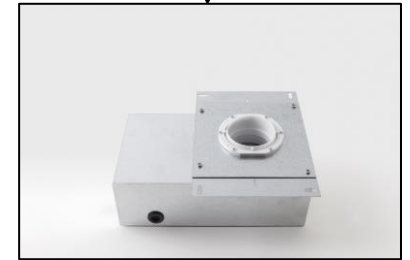

Conbox + concrete kit

or



Concrete ring for standard conbox

Tetrix GU10

LED retrofit



Hue retrofit 2200K – 6500K

2200K – 6500K
medium
350lm
5W
15.000hrs

Deep dimmable
Direct control via Bluetooth
Add Hue bridge for even more possibilities








Hue retrofit 2700K

2700K
medium
400lm
5.2W
15.000hrs

Dimmable
Direct control via Bluetooth
Add Hue bridge for even more possibilities

Specifications

Tetrix
2700K – 3000K – 4000K WD 1800K-3000K
CRI90+
15° - 25° - 40°
IP55
739 lm
7,2W
102 lm/W
dimnable

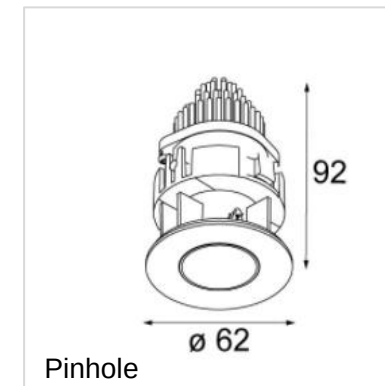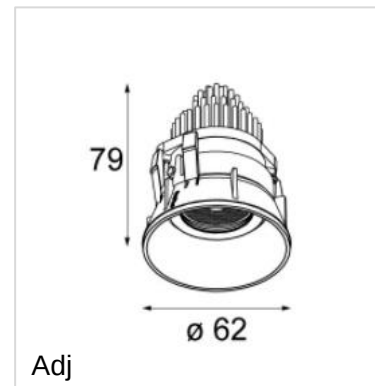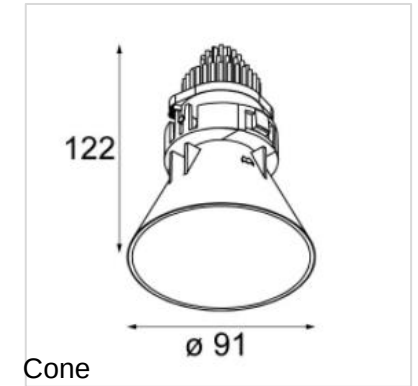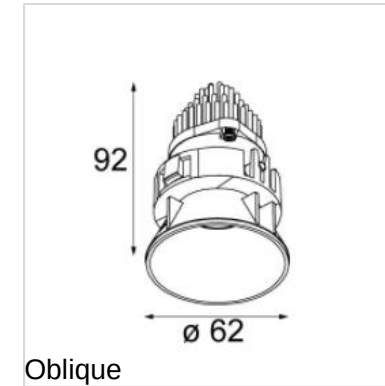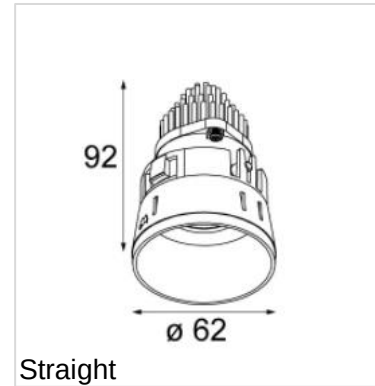

(1) 3000K, white struc, medium, 500mA, Tetrix straight

CASAMBI



Always check our website for the most complete and up to date specifications!



DESIGN

PLAY WITH LIGHT; 2 COLOURS, 5
DESIGNS, 4 ACCESSORIES

FLANGE, TRIMLESS, MORE
SUBTLE OR MORE PRONOUNCED

DEEP RECESSED LIGHT SOURCE



APPLICATION

IP55 AND UV-RESISTANT
MATERIAL, FOR OUTDOOR USE

RESIDENTIAL
HOSPITALITY
RETAIL
OFFICE

FIXED OR ADJUSTABLE LIGHT
SOURCE

SAME SIZE FOR FIXED AND
ADJUSTABLE



TECHNOLOGY

EASY INSTALLATION IN
DIFFERENT CEILING TYPES


TIR LENS TECHNOLOGY
(CONCENTRATED LIGHT BEAM)

ACCURATE COLOUR RENDERING

CONNECTED LIGHTING

Inspiration





Tetrix Cone + LC44



 IP55












Tetrix Adjustable + snoot

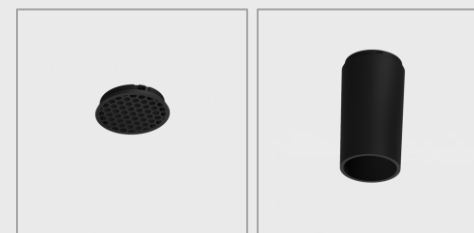

 IP55





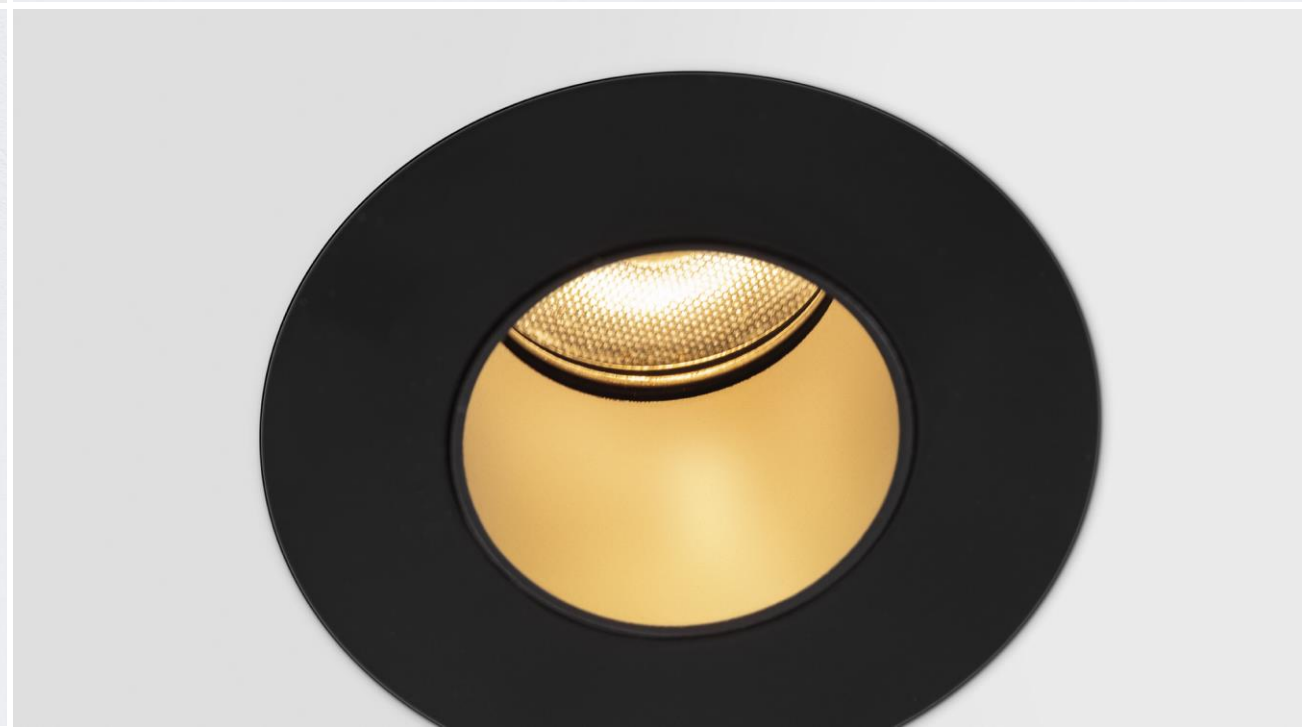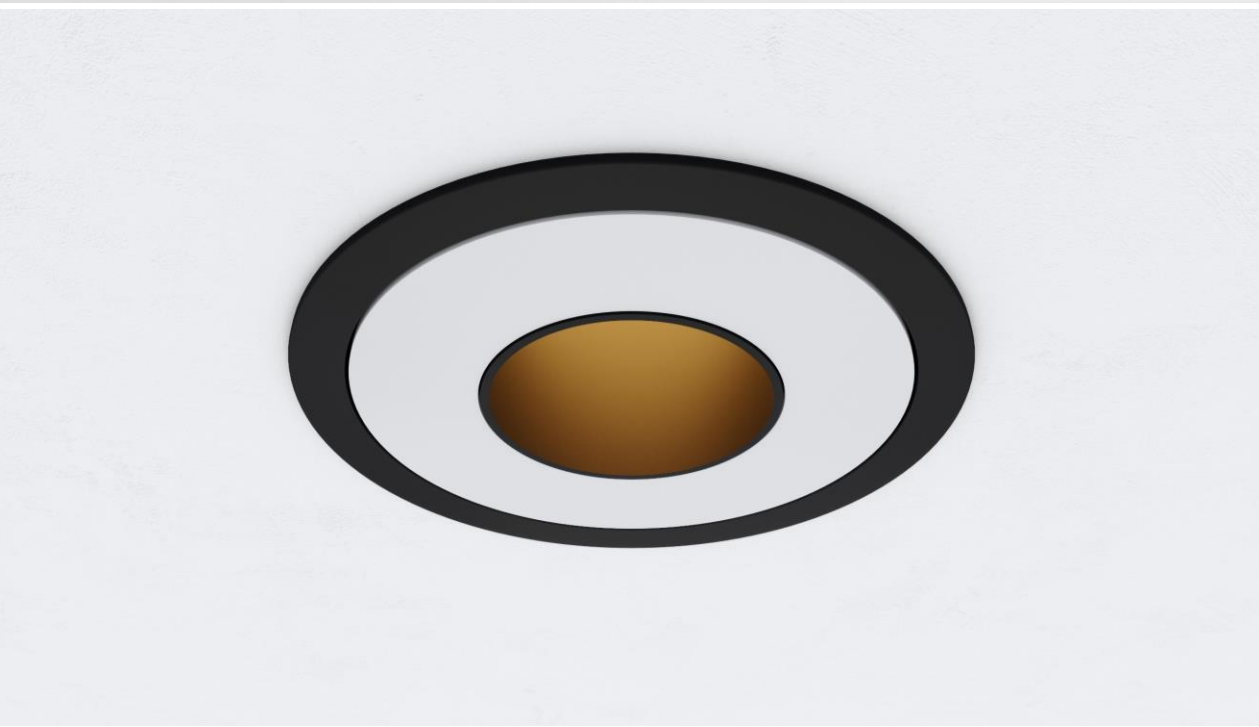



Tetrix **Straight** + LC64









