



# Minude



# Minude

Small things matter

# About Minude

- Miniaturized spot that make a big impression
- Refined and minimalistic look and feel
- Only the bare essence





# Producttypes




**Semi-recessed**



**Semi-recessed susp**



**Track 48V 1x**

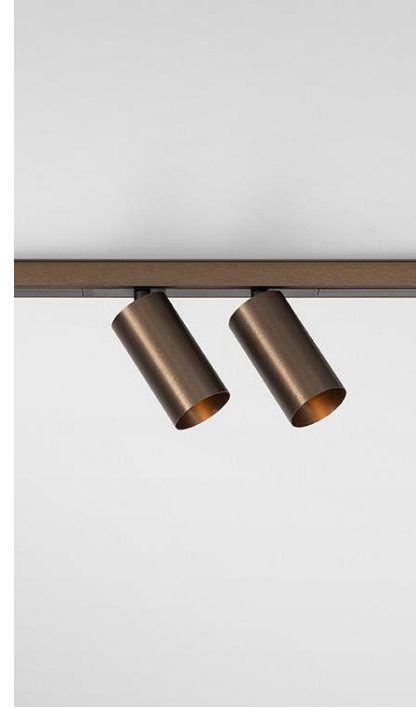


**Track 48V 2x**



**Susp track 48V**

# Colours



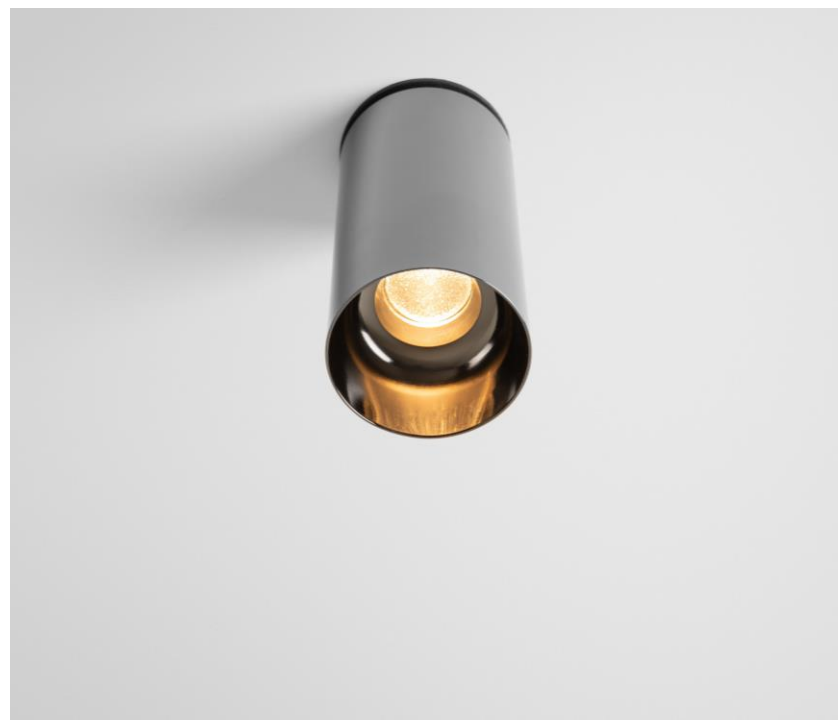

## State-of-the-art optical system






## Semi-recessed: design features



## Semi-recessed: flexibility

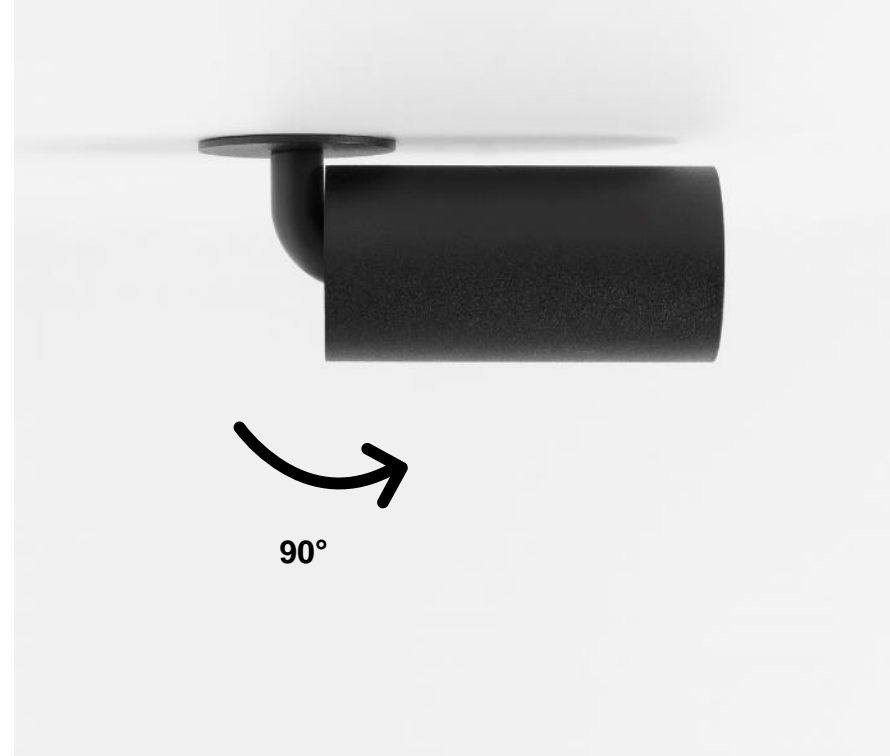










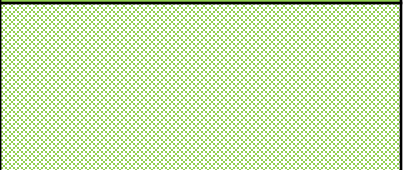
## Suspension: design features




Thin matt black cable

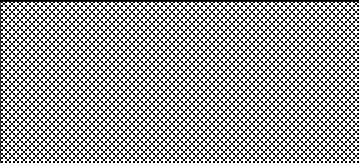Matt black back plate
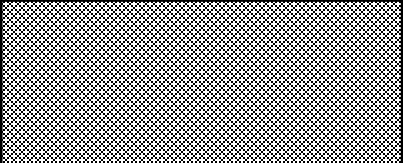
# Remote driver overview

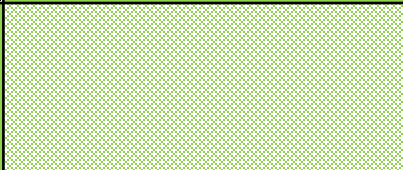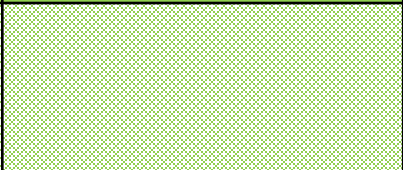	0-10V/TRE DIM	0-10V (ELDOLED)	DALI (ELDOLED)	2-WIRE (LUTRON)	ECOSYSTEM (LUTRON)
IC					
NON IC					




not available

available


IC also applicable

*Always check our website for the most complete and up to date specifications!*




# INSTALLATION WITH 4X4 OCTAGONAL JUNCTION BOX

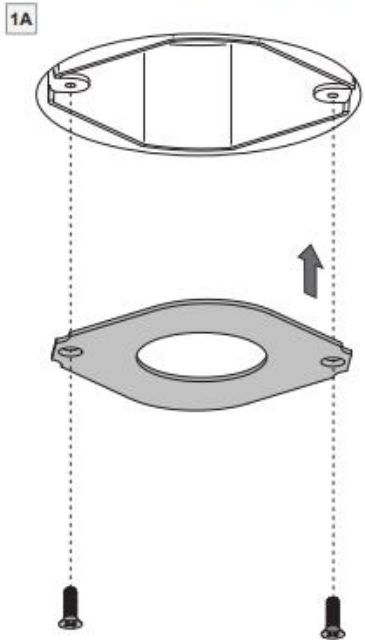


JUNCTION BOX NOT INCLUDED

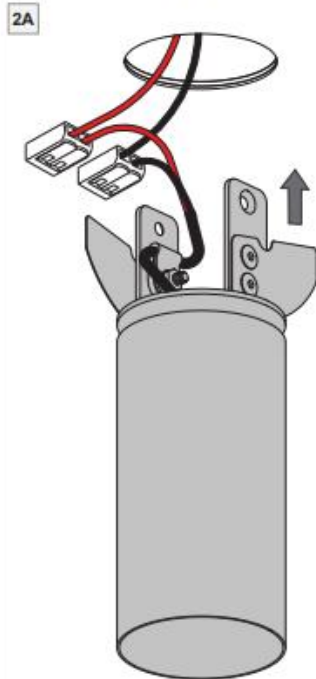

# INSTALLATION WITHOUT JUNCTION BOX

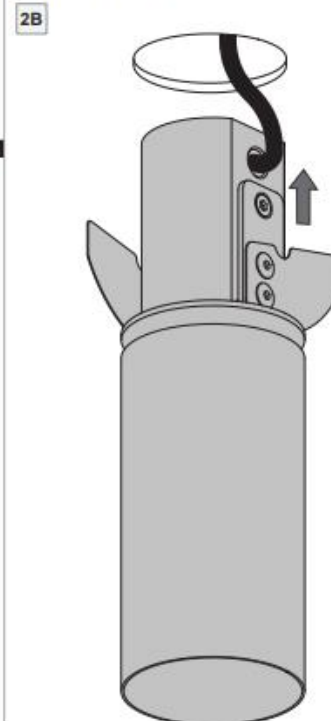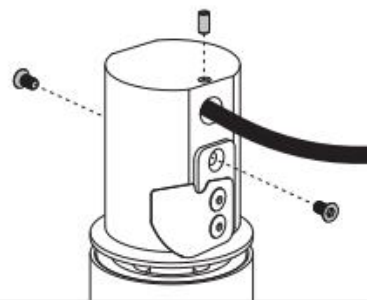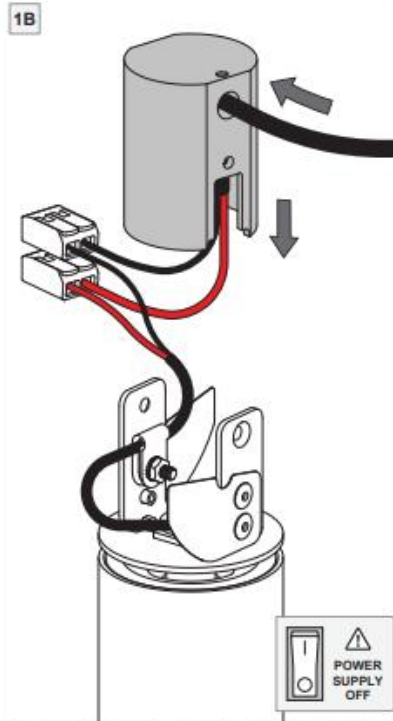

3



## ELECTRICAL RATINGS

Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,8	18,0	5,7
500	15,2	18,6	8,5

FOR SERIAL CONNECTION, RESPECT POLARITY!

⚡ RED

⚡ BLACK

## LED LUMINAIRE

### IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions.
- Save these instructions.

### BASIC SAFETY PRECAUTIONS

- Suitable for damp locations.



### LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




### PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

### POWER SUPPLIES & ACCESSORIES

For latest version of all power supplies and available accessories check [www.supermodular.us](http://www.supermodular.us) or connect with your sales contact.

## ELECTRICAL CONNECTION

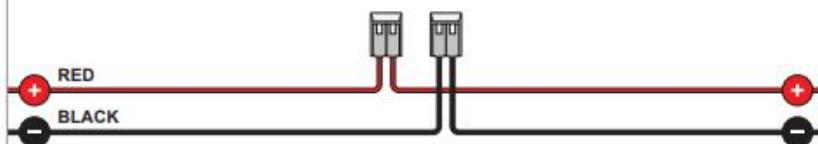


⚡ MAX 500mA DC

⚡ RESPECT POLARITY


Ø1" 1/16 (11mm)

0,2 - 4mm<sup>2</sup>  
24 - 12 AWG

## MOUNTING HOLE




1

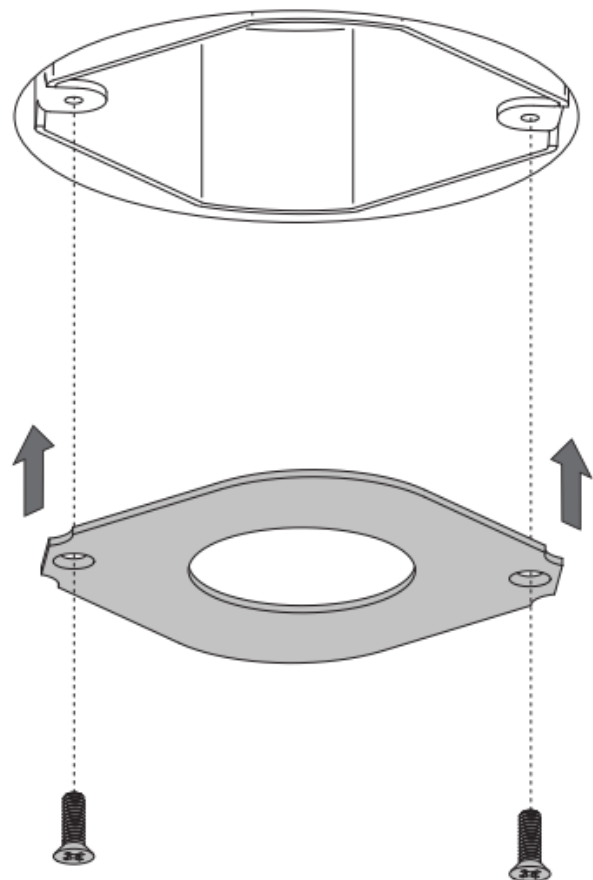


4X4 OCTAGONAL JUNCTION BOX NOT INCLUDED

2

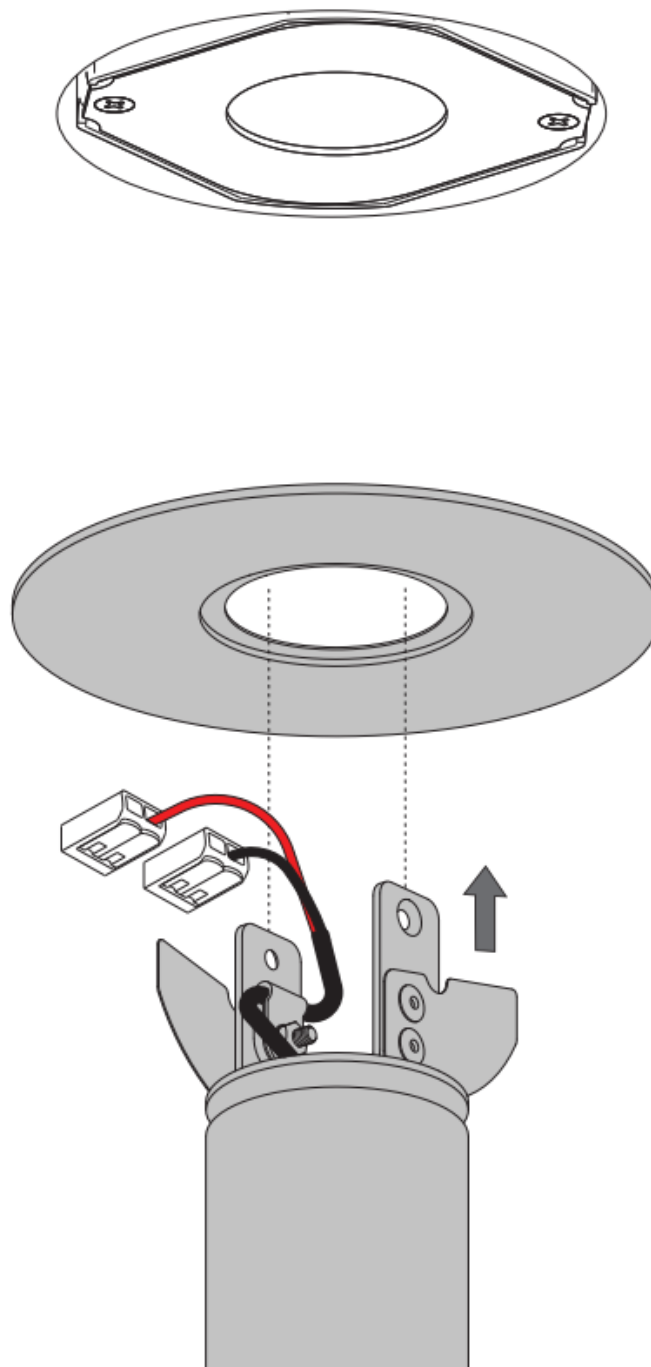

3

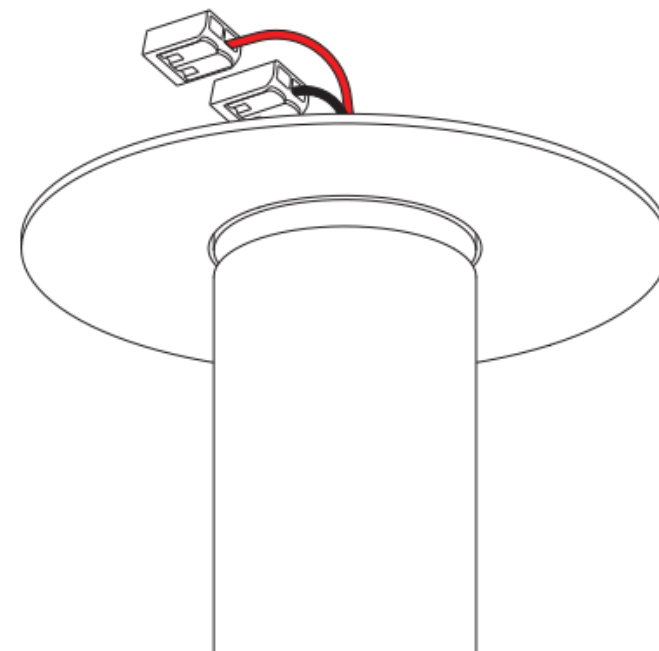

FINISH ACCORDING TO INDIVIDUAL MANUAL

#### LED LUMINAIRE BACKPLATE ACCESSORY

#### IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions.
- Save these instructions.

#### MUST BE COMBINED WITH

(NOT INCLUDED)


- Minude 1.8 adjustable (1x)

#### LIGHT ENGINES, POWER SUPPLIES & ACCESSORIES

For latest version of all light engines, power supplies and available accessories check [www.supermodular.us](http://www.supermodular.us) or connect with your sales contact.

# INSTALLATION WITH 4X4 OCTAGONAL JUNCTION BOX


1A

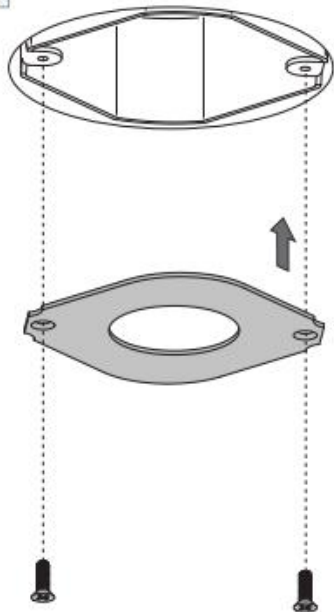

JUNCTION BOX NOT INCLUDED





2A

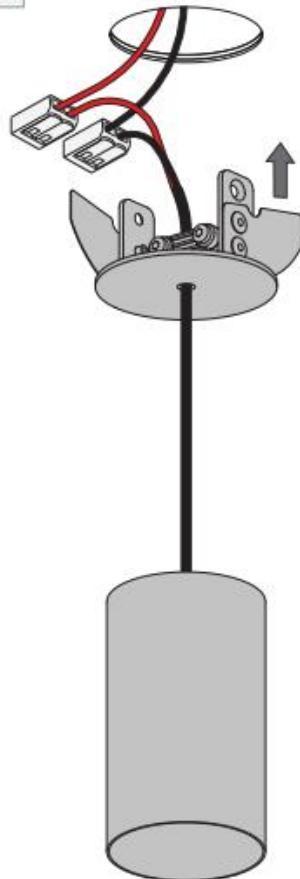

# INSTALLATION WITHOUT JUNCTION BOX

1B

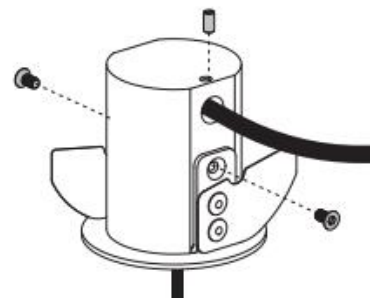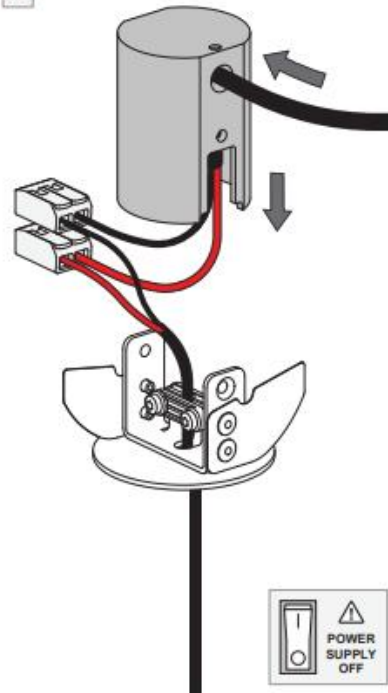

2B



3



## ELECTRICAL RATINGS

Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,8	18,0	5,7
500	15,2	18,6	8,5

FOR SERIAL CONNECTION, RESPECT POLARITY!

RED

BLACK

## LED LUMINAIRE

## IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions.
- Save these instructions.

## BASIC SAFETY PRECAUTIONS

- Suitable for damp locations.



## LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




## PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

## POWER SUPPLIES & ACCESSORIES

For latest version of all power supplies and available accessories check [www.supermodular.us](http://www.supermodular.us) or connect with your sales contact.

## ELECTRICAL CONNECTION

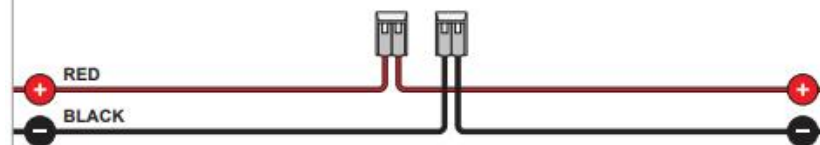


MAX 500mA DC

RESPECT POLARITY


Ø 1/8" (11mm)

0,2 - 40mm²  
24 - 12 AWG

## MOUNTING HOLE




## SHORTEN CABLE






1

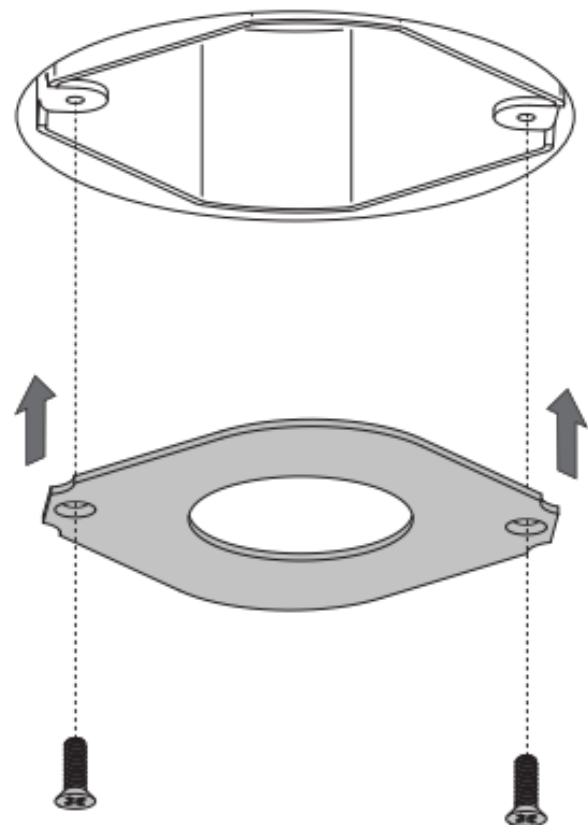


4X4 OCTAGONAL JUNCTION BOX NOT INCLUDED

2

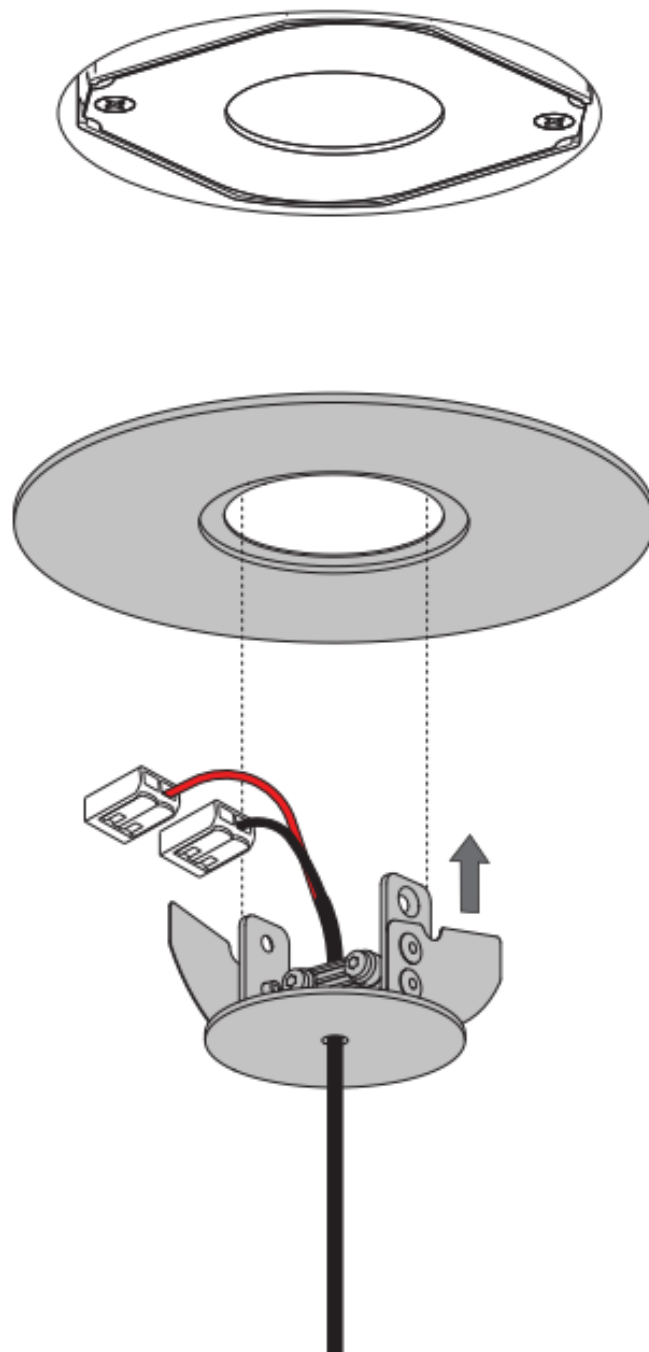

3

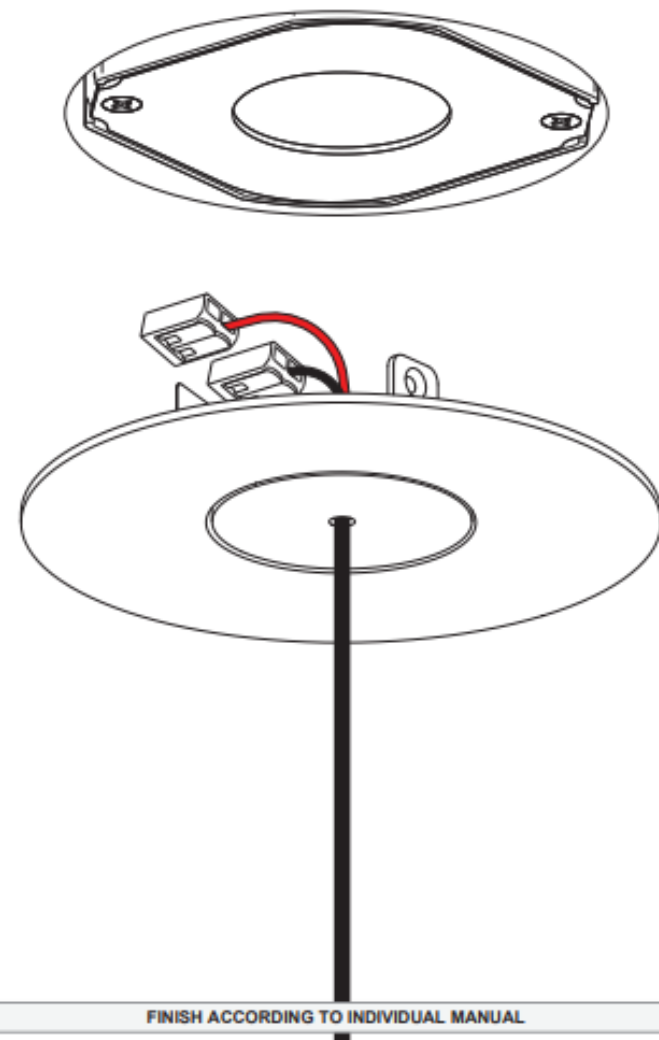

#### LED LUMINAIRE BACKPLATE ACCESSORY

#### IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions.
- Save these instructions.

#### MUST BE COMBINED WITH

(NOT INCLUDED)

- Smart surface tubed suspension 1.9, or
- Minude 1.8 suspension (1x)

#### LIGHT ENGINES, POWER SUPPLIES & ACCESSORIES

For latest version of all light engines, power supplies and available accessories check [www.supermodular.us](http://www.supermodular.us) or connect with your sales contact.





## DESIGN

REFINED MINIATURIZED SPOT

STRIPPED TO THE ESSENCE

6 SOPHISTICATED FINISHINGS



## APPLICATION

PHENOMENAL ROTATION  
FLEXIBILITY

STAND ALONE OR TRACK  
VERSION

CEILING OR WALL MOUNTED  
TRACK OR TRACK SUSPENSION

RESIDENTIAL  
HOSPITALITY



## TECHNOLOGY

HIGH QUALITY LED AND  
GLASS LENS

CONCENTRATED LIGHT CIRCLE

REMOTE DRIVER































