



MP3.1




MP3.1

All round LED profile

About MP3.1

- Ultra thin profile
- 3 different lamp units
- General and/or accent lighting
- Consistent color temperatures

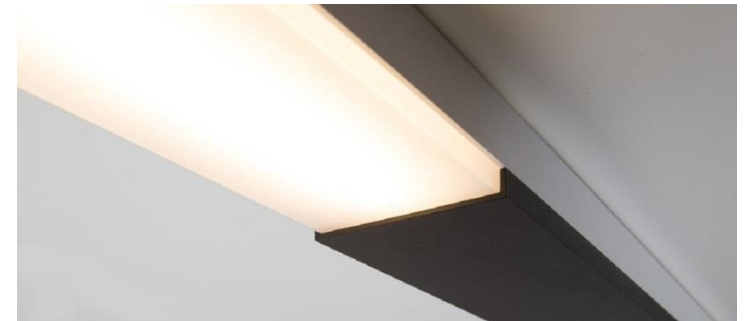




Market segments

- High- end residential
- Hospitality
- Retail
- Office


Mounting



surface



suspended




Colors




General lighting

- Profile base = heatsink
- Polycarbonate diffuser
- Different lengths
 - 33.1"
 - 44.1"
 - 55.1"
 - 66.1"
 - 77.2"
 - 88.2"

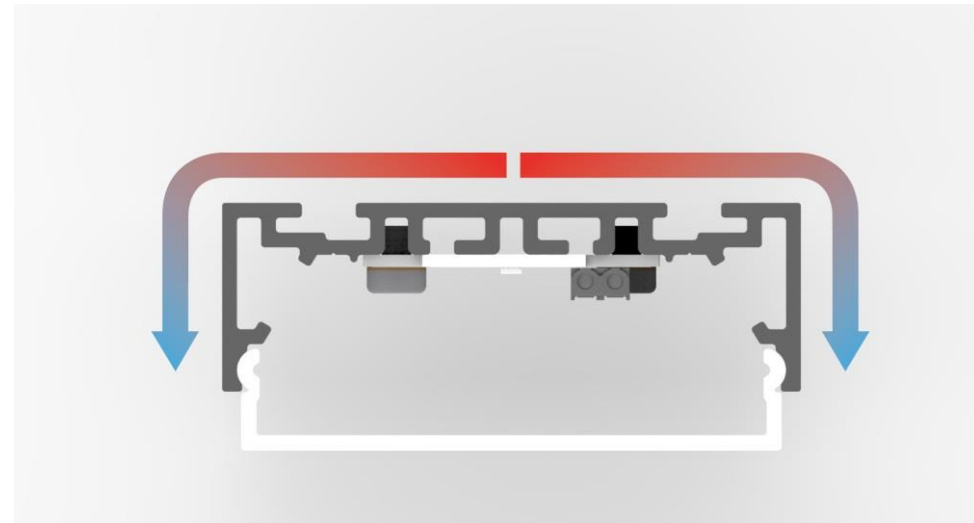

Accent lighting – recessed spotlight (DE)

- Profile base = heatsink
- 2 beam angles
 - Medium: 25°
 - Flood: 40°
- 2 color temperatures
 - 2700K
 - 3000K

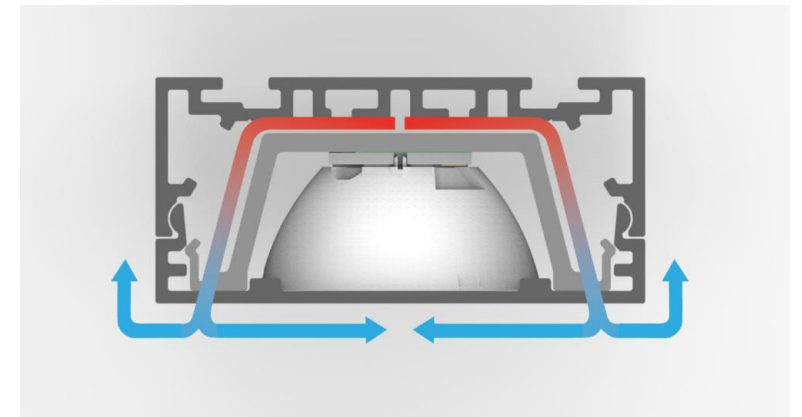

Accent lighting – Rektor

- 2 beam angles
 - Medium: 25°
 - Flood: 40°
- 2 color temperatures
 - 2700K
 - 3000K
- Black struc or white struc
- H 360° V 90°




Remote gear



Surface mounted gear / suspension – 157.5" cable

Make your own 3.1

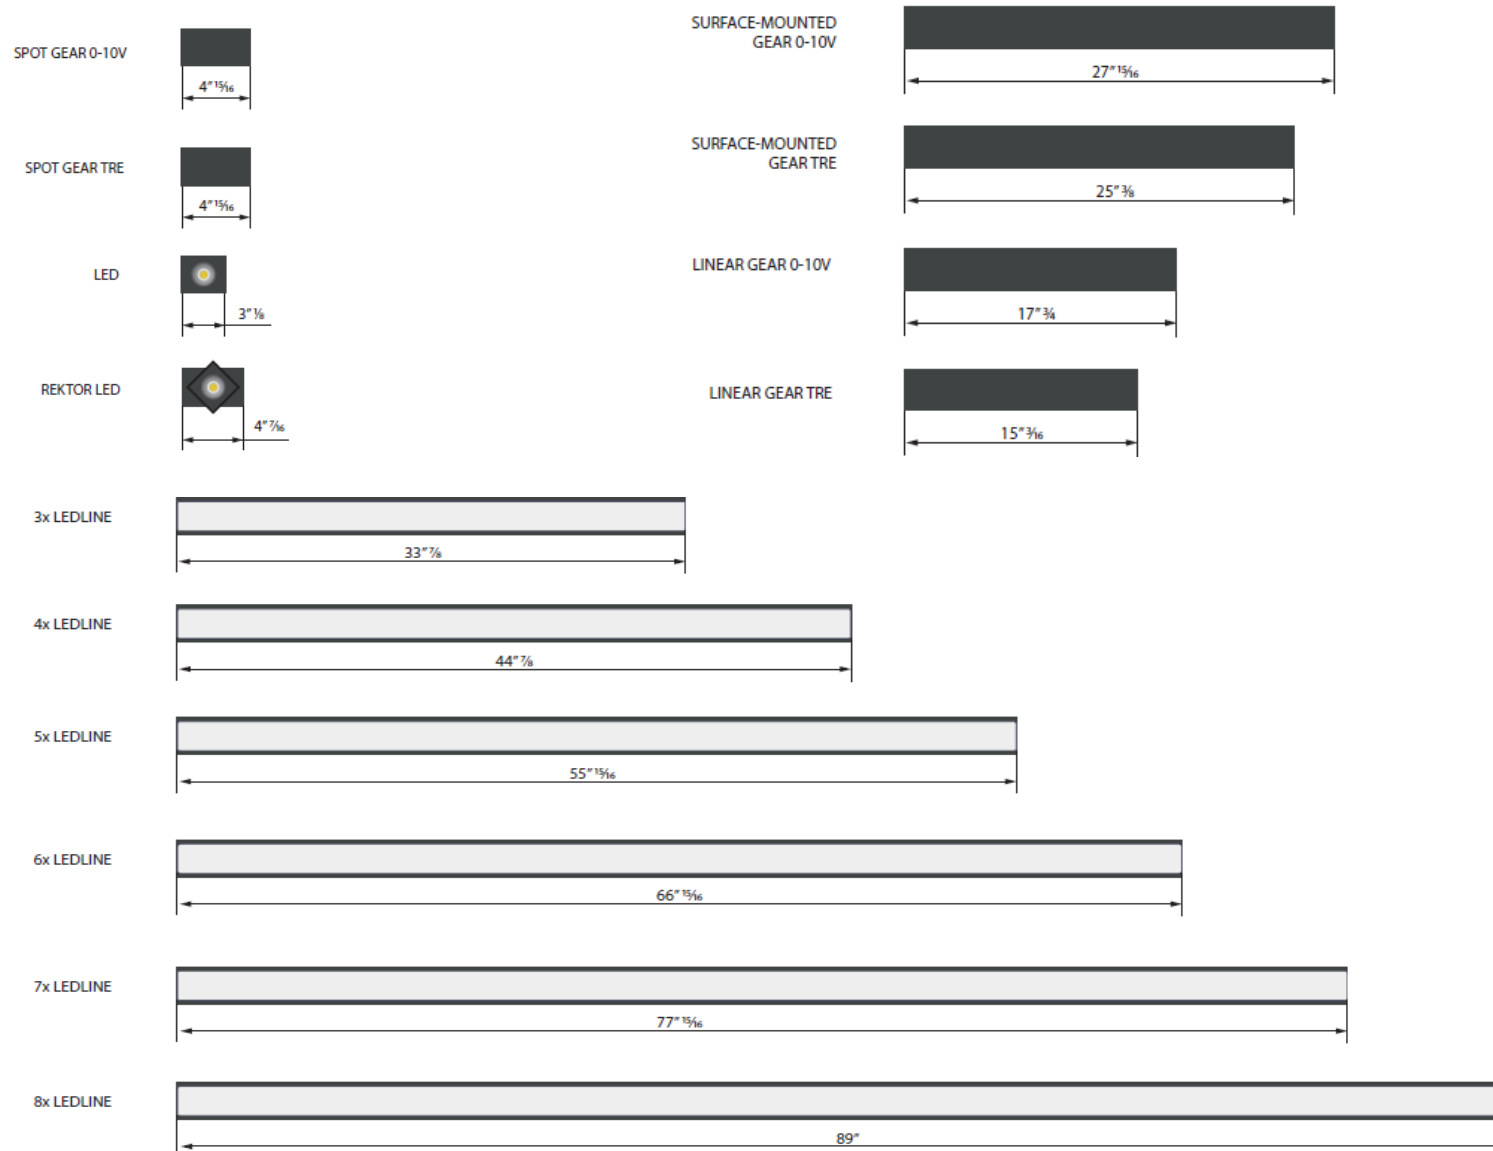


Specifications

LED-line	Recessed spotlight	Rektor
2700K - 3000K		
CRI90+		
33.1" – 44.1" – 55.1" – 66.1" – 77.2" – 88.2"	25° – 40°	
71 lm/W ⁽¹⁾	1517 lm ⁽²⁾	1233 lm ⁽³⁾
8 W/ft ⁽¹⁾	16 W ⁽²⁾	16 W ⁽³⁾
575 lm/ft ⁽¹⁾	95 lm/W ⁽²⁾	77 lm/W ⁽³⁾
TRE dim 0-10V	TRE dim 0-10V	TRE dim 0-10V

(1) 3000K, white struc

(2) 3000K, 25°, value per lamp module

(3) 3000K, 25°, white struc, value per lamp module

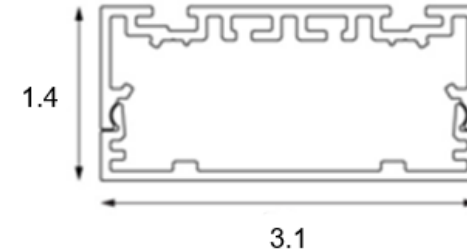

Always check our website for the most complete and up to date specifications!



DESIGN

ULTRA THIN PROFILE

CHOOSE YOUR PREFERRED
COMBINATION IN BLACK AND/OR
WHITE STRUC

NO VISIBLE SCREWS



APPLICATION

HIGH-END RESIDENTIAL
HOSPITALITY
RETAIL
OFFICE

GENERAL AND ACCENT LIGHTING

SUSPENDED OR SURFACE
MOUNTED

GEAR INCLUDED OR WITH
REMOTE GEAR-UNITS SURFACE



TECHNOLOGY

CONSISTENT COLOR
TEMPERATURES

ACCURATE COLOR RENDERING

MEDIUM OR FLOOD REFLECTOR

MULTIPLE DIM OPTIONS

PROFILE SERVES AS HEATSINK











