

Qbini





Qbini

Miniature, modern simplicity for intimate spaces



About Qbini

- Miniature square recessed spot
- Different building blocks, configurable and versatile




Designer: Florent Coirier










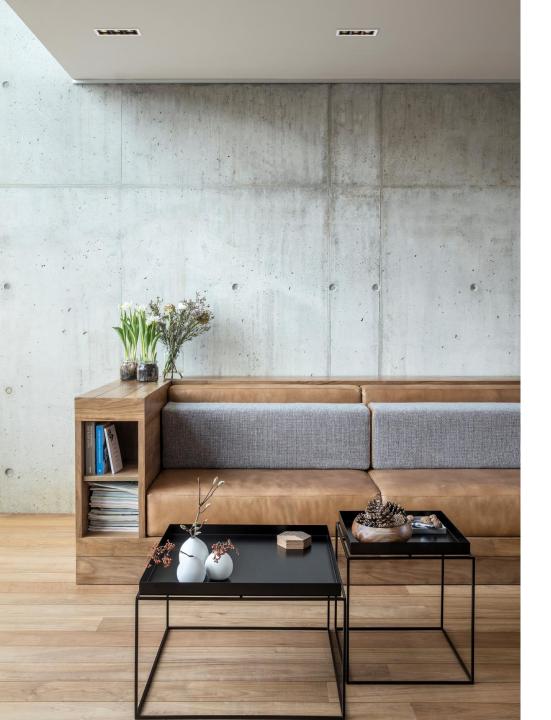

Market segments

- High-end residential
- Hospitality
- Boutiques

Frames: with or without trim

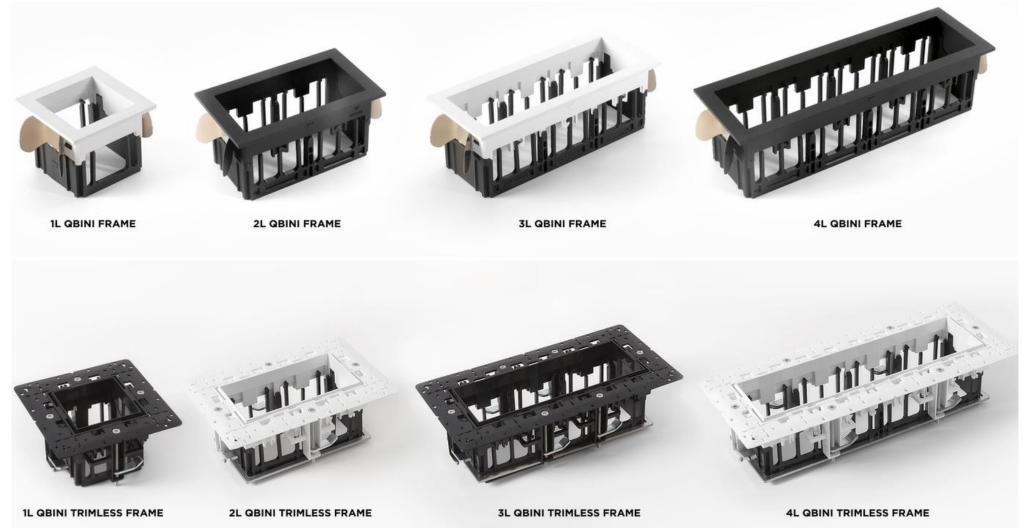




Installation with or without trim



QBINI FRAME WITH A TRIM

Aluminum frame 3/8 inch border Leaf springs

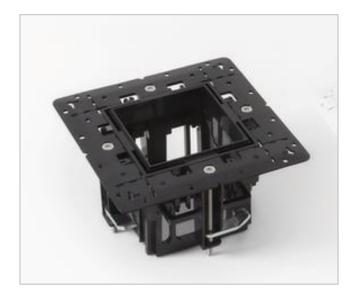

QBINI TRIMLESS FRAME TRIMLESS

Plastic frame No border Fixation screws



Installation with or without trim








QBINI TRIMLESS
WITHOUT TRIM



Dual positioning

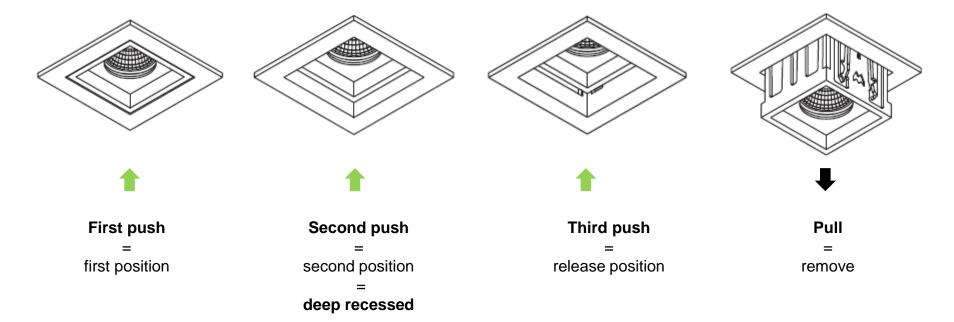








Accent lighting units

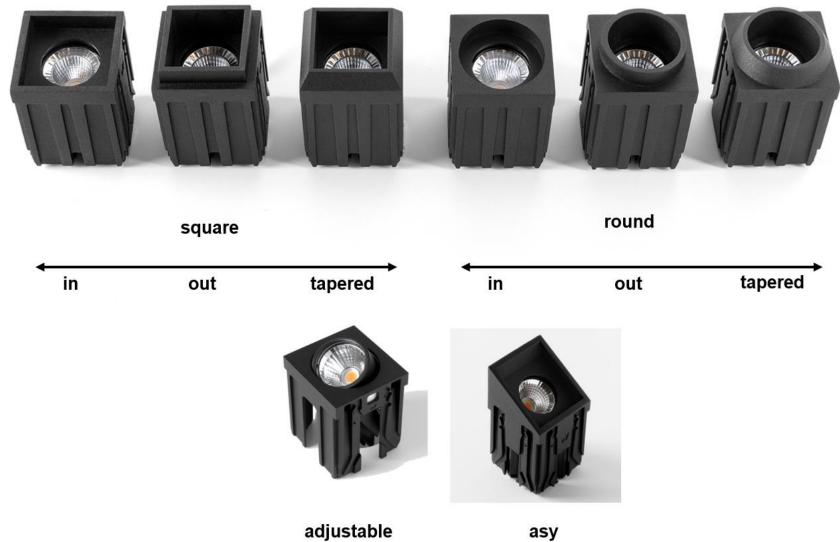



asy

General lighting units



General downlight 2x



General downlight 4x



Colours

- Qbini units
 - Black structure
 - White structure
 - Gold
- Qbini frames
 - Black structure
 - White structure
 - Gold
- Qbini trimless frame
 - Black structure
 - White structure

















Choose your color combination






Frosted or microprismatic lens



Frosted lens



for uniform, general lighting (only with medium reflector)



Microprismatic lens



for soft lighting with reduced glare (with medium and flood reflector)



Clear, frosted or microprismatic lens






Frosted lens

Microprismatic lens



Light distribution

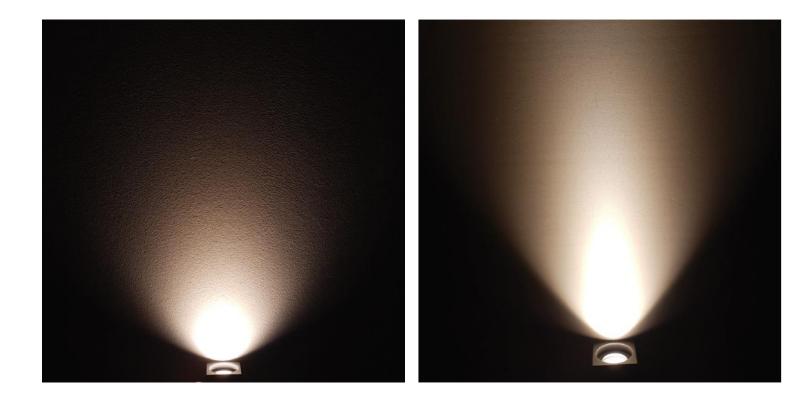




Microprismatic lens



Light distribution

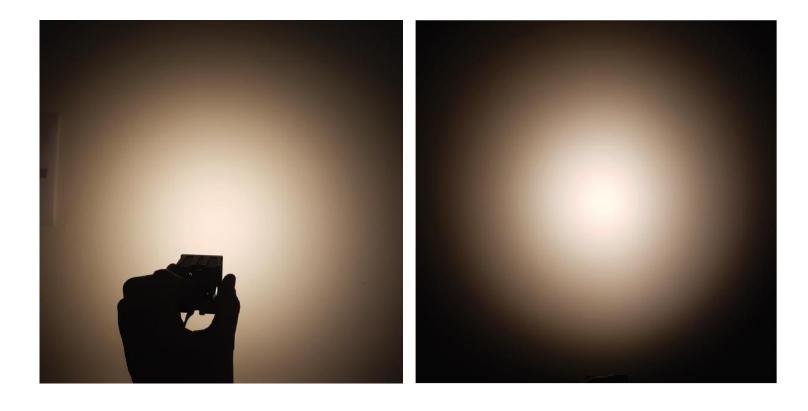

Frosted lens

Microprismatic lens



Combine with accessories









Snoot

Honeycomb

Crossblade

Blind cover












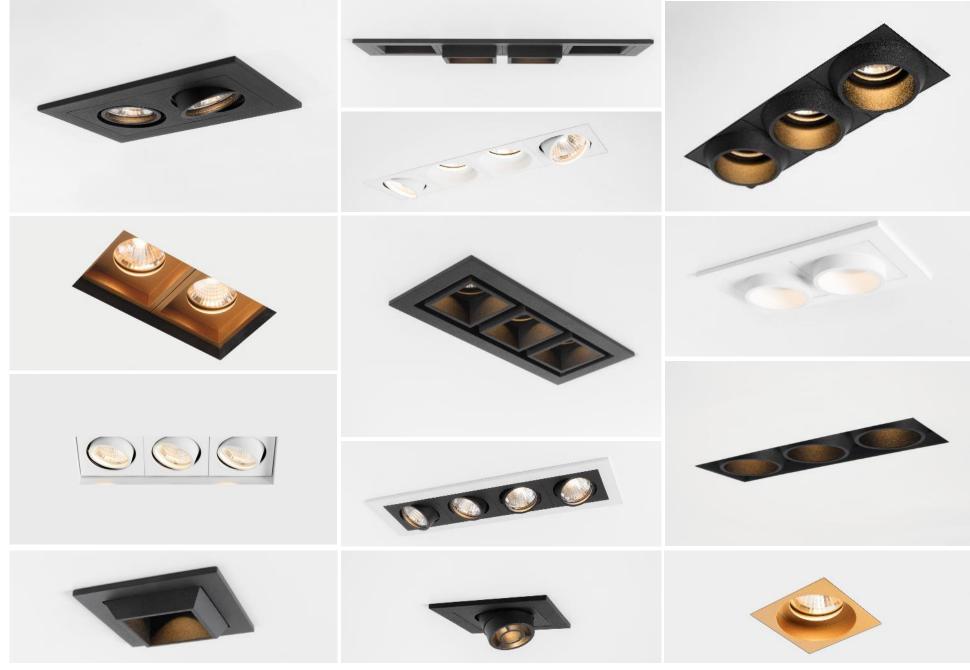






Specifications accent lighting


Qbini ⁽¹⁾ – frosted	Qbini ⁽¹⁾ – microprismatic	
2700K - 3000K - 3500K Warm dim: 1800K – 3000K		
CRI90		
60°	25° - 40°	
278 lm ⁽²⁾	365 lm ⁽²⁾	
4,3 W ⁽²⁾		
65 lm/W ⁽²⁾	85 lm/W ⁽²⁾	
UGR31	UGR15	
DE 0-10V – Trailing edge dimmable 1%		

- (1) Qbini round in
- (2) 2700K, black struc, 25°, 500mA













Specifications general lighting

General 2x	General 4x	
2700K – 3000K – 3500K		
CRI90+		
Suitable for damp locations		
560 lm ⁽¹⁾	1247 lm ⁽¹⁾	
6 W ⁽¹⁾	12 W ⁽¹⁾	
93 lm/W ⁽¹⁾	104 lm/W ⁽¹⁾	
DE		





(1) 3000K, white struc, 500mA



IC housing (UAT)

	350 mA	500 mA
1L		trim trimless
2L	trim trimless	trim trimless
3L	trim trimless	trim trimless
4L	trim trimless	





DESIGN

MINI SQUARE RECESSED SPOT

RECESSED AND DEEP RECESSED POSITION

6 FIXED AND 1 ADJUSTABLE LIGHT SOURCES

1X, 2X, 3X AND 4X LAMP FRAMES, WITH OR WITHOUT TRIM

FROSTED OR MICROPRISMATIC LENS

WHITE, BLACK & GOLD FINISHING



APPLICATION

MINIATURIZED SPOTLIGHT

PLEASANT AMBIENT LIGHTEFFECT

HIGH END RESIDENTIAL
HOSPITALITY
BOUTIQUES



TECHNOLOGY

PATENTED INSTALLATION SYSTEM

DUAL POSITIONING

FROM MEDIUM TO FLOOD

SNOOT, HONEYCOMB, CROSSBLADE AND BLIND COVER



